

SPECIFICATIONS SHEET

A200 – 2 in. PLASTIC PUMP



Air Inlet
3/4" FNPT

Liquid Inlet
2"

Liquid Discharge
2"

Connection Type
ANSI/DIN (Flanged)

Max Suction Lift Capability
17 ft-H₂O (5.2 m-H₂O) Dry
29 ft-H₂O (8.8 m-H₂O) Wet


Max Flow Rate
160 gpm (605 lpm)

Max Pressure
120 psi (8.2 bar)

Max Solids Dia.
1/4" (6.4 mm)

Disp. Per Stroke
0.48 gal (1.82 L)

Weight
Poly: 56 lbs (25 kg)
PVDF: 84 lbs (38 kg)

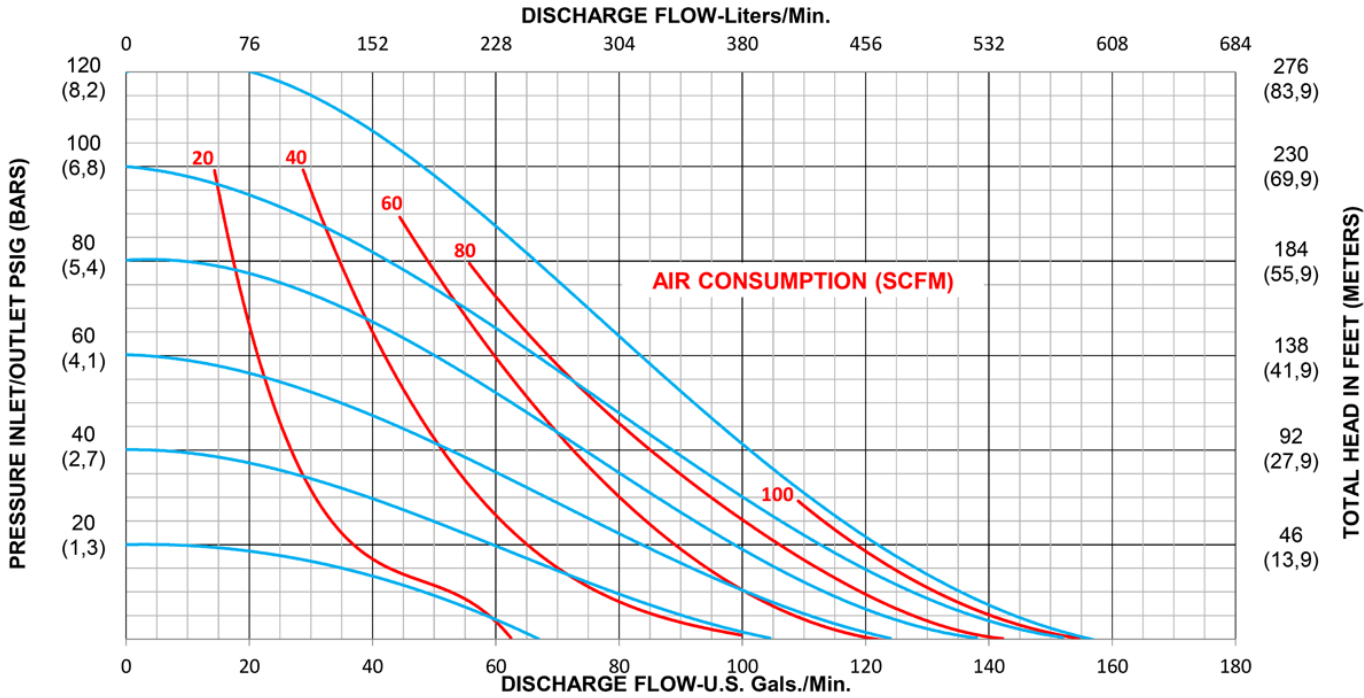

PSG
All-Flo
22069 Van Buren Street
Grand Terrace, CA 92313, USA


P: +1 (440) 354-1700
F: +1 (440) 354-9466

all-flo.com



SPECIFICATIONS SHEET

A200 – 2 in. PLASTIC PUMP

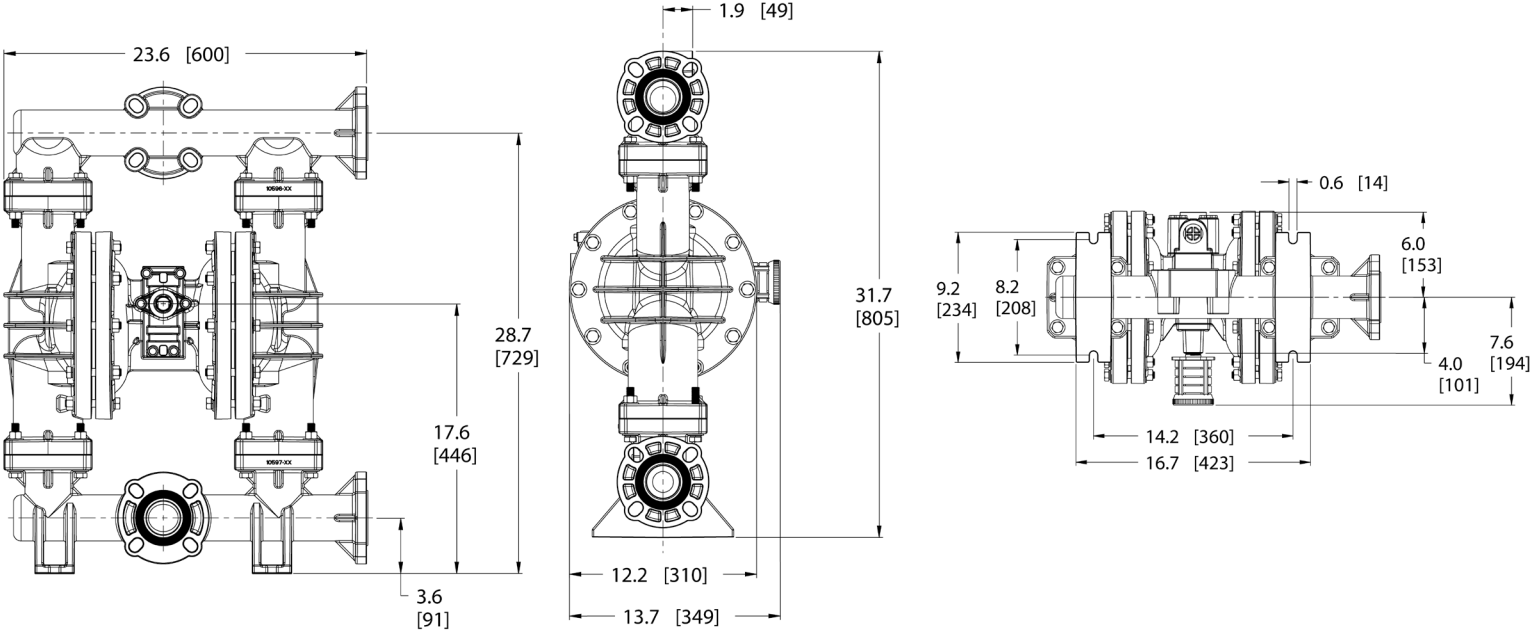

Construction

Wet End:	Polypropylene, PVDF
Air End:	Glass Filled Polypropylene
Diaphragms:	Bunast™, PTFE With Santoprene® backup, Santoprene®, FKM
Balls:	Bunast™, PTFE, Santoprene®, FKM
Seats:	Polypropylene, PVDF
O-Rings:	Buna-N, EPDM, PTFE, FKM
Hardware:	PTFE Coated Stainless Steel, Stainless Steel
Muffler:	Plastic

Popular Models

A200-FPP-GNPN-S70	Polypropylene, ANSI/DIN Flange, Bunast™ Diaphragm, Buna-N Ball, Polypropylene Seat, Buna-N O-Ring, Stainless Steel Hardware
A200-FPP-SSPE-S70*	Polypropylene, ANSI/DIN Flange, Santoprene® Diaphragm, Santoprene® Ball, Polypropylene Seat, EPDM O-Ring, Stainless Steel Hardware
A200-FPP-TTPT-S70	Polypropylene, ANSI/DIN Flange, PTFE Diaphragm, PTFE Ball, Polypropylene Seat, PTFE O-Ring, Stainless Steel Hardware
A200-FPK-SSKE-S70	PVDF, ANSI/DIN Flange, Santoprene® Diaphragm, Santoprene® Ball, PVDF Seat, EPDM O-Ring, Stainless Steel Hardware
A200-FPK-TTKT-S70	PVDF, ANSI/DIN Flange, PTFE Diaphragm, PTFE Ball, PVDF Seat, PTFE O-Ring, Stainless Steel Hardware

*Pump model is part of the Ready2Ship Program



PSG
All-Flo
22069 Van Buren Street
Grand Terrace, CA 92313, USA

P: +1 (440) 354-1700
F: +1 (440) 354-9466

all-flo.com

