

SPECIFICATIONS SHEET

F200 – 2 in. All-Pur™ FDA Pump



Air Inlet
3/4" FNPT

Liquid Inlet
2-1/2"

Liquid Discharge
2-1/2"

Connection Type
Tri-Clamp


Max Suction Lift Capability
24.4 ft-H₂O (7.4 m-H₂O) Dry
31.7 ft-H₂O (9.7 m-H₂O) Wet

Max Flow Rate
190 gpm (719 lpm)

Max Pressure
120 psi (8.2 bar)


Max Solids Dia.
1/4" (6.4 mm)

Weight
115 lbs (52 kg)

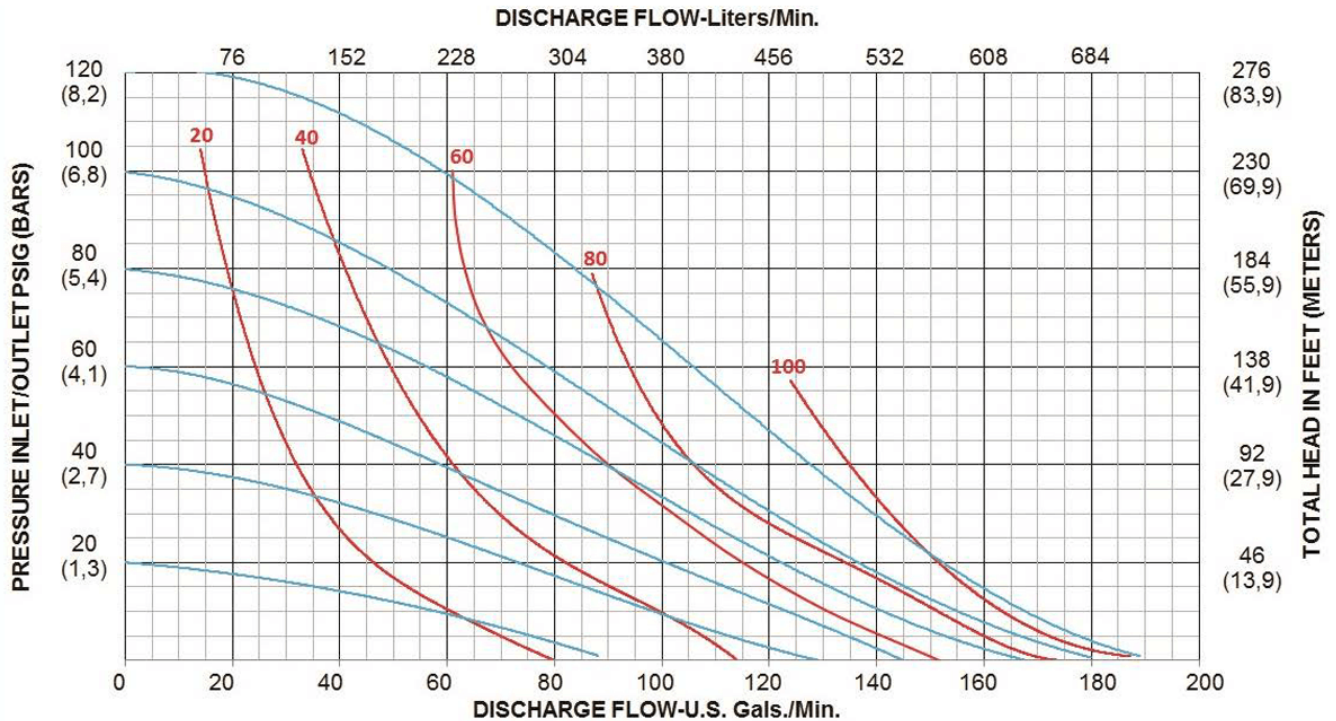

SPECIFICATIONS SHEET

F200 – 2 in. All-Pur™ FDA Pump

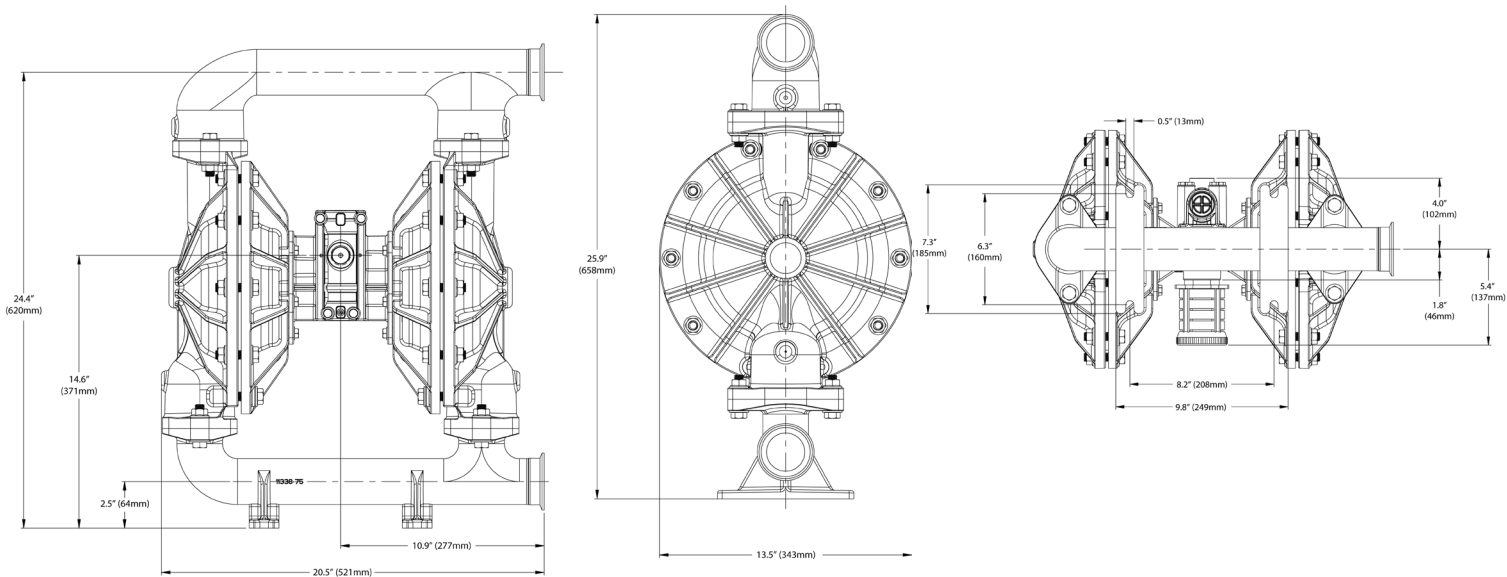

Construction

Wet End:	Passivated Stainless Steel
Air End:	Aluminum, Stainless Steel
Diaphragms:	Hytrel™, PTFE With Santoprene® backup, Santoprene®
Balls:	Buna-N, PTFE, Santoprene®
Seats:	Stainless Steel
O-Rings:	Buna-N, EPDM, PTFE
Hardware:	Stainless Steel
Muffler:	Plastic, Metal

Popular Models

F200-TAE-TT3T-S70	Passivated Stainless Steel, Tri-Clamp, PTFE Diaphragm, PTFE Ball, Stainless Steel Seat, PTFE O-Ring, Stainless Steel Hardware
F200-TAE-4S3M-S70	Passivated Stainless Steel, Tri-Clamp, Santoprene® [FDA] Diaphragm, Santoprene® Ball, Stainless Steel Seat, EPDM [FDA] O-Ring, Stainless Steel Hardware
F200-TAE-HB3B-S70	Passivated Stainless Steel, Tri-Clamp, Hytrel® [FDA] Diaphragm, Buna-N [FDA] Ball, Stainless Steel Seat, Buna-N [FDA] O-Ring, Stainless Steel Hardware