



Addendum to the IOM for EU & UK Compliance

960641

Form 617

Section	Forms
Effective	Sept 2026
Replaces	July 2026

Blackmer

Addendum to the IOM for EU & UK Compliance

All Sliding Vane Pump Models

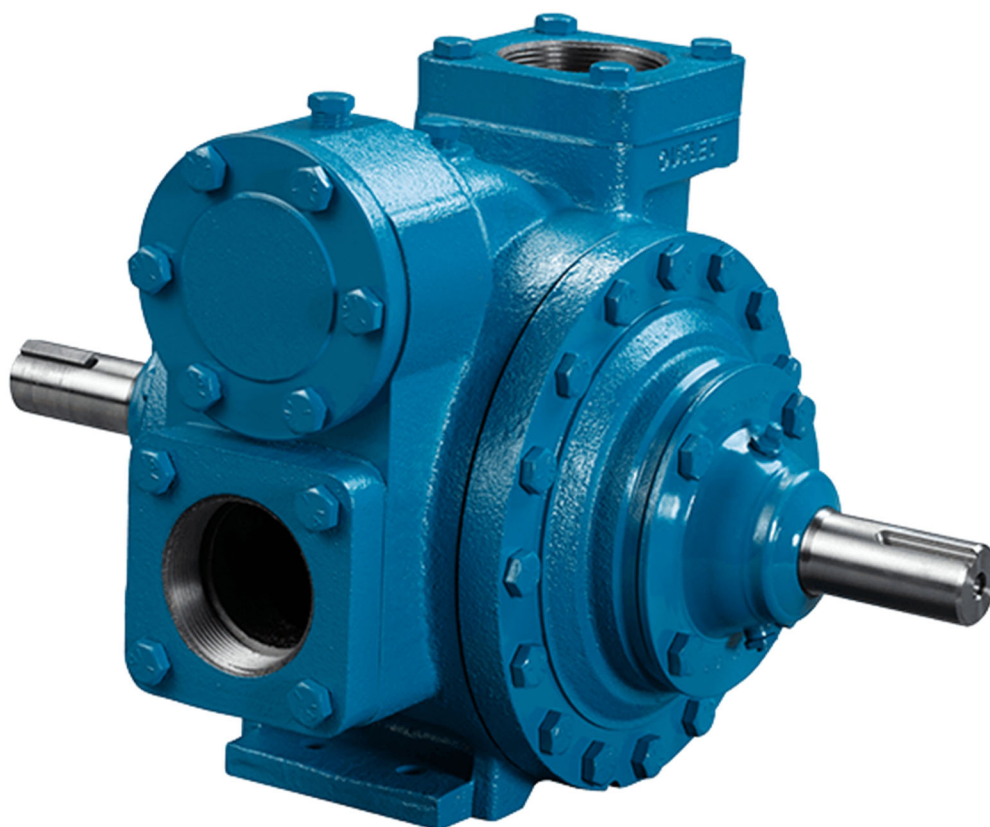


Table of Contents

List of ISO Standards and Other Technical Standards	2
General Description	3
Safety Information and General Warnings	4
Installation and Operation Information	6
Blackmer Certificates of Compliance	15
Blackmer Contact Information.....	22

List of Standards

Blackmer pumps are designed to applicable national and international standards using sound engineering principles. They are built in ISO registered facilities at locations in the USA and India. This is a listing of those standards that have been applied or consulted in the design evaluation of the product or directly applied in the certification of the product. The application of some of these standards is the responsibility of the end user and not that of Blackmer.

Directive 2014/34/EU Equipment for potentially explosive atmospheres (ATEX)
UKSI 2016 No. 1107 The Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2016

Directive 2006/42/EC Machinery Directive
Supply of Machinery (Safety) Regulations 2008 No. 1597

Regulation (EU) 2023/1230 Machinery Regulation

Directive 2014/34/EU: Guidelines on application

EN ISO 80079-36:2016 *Explosive atmosphere-Part 36: Non-electrical equipment for explosive atmospheres-Basic method and requirements*

EN ISO 80079-37:2016 *Explosive atmosphere-Part 37: Non-electrical equipment for explosive atmospheres-Non electrical type of protection constructional safety "c", control of ignition source "b", liquid immersion "k"*

ISO 1813 *Belt drives - V-ribbed belts, joined V-belts and V-belts including wide section belts and hexagonal belts - Electrical conductivity of antistatic belts: Characteristics and methods of test*

EN ISO 12100:2010 *Safety of Machinery-General principles for design. Risk assessment and risk reduction (ISO 12100-1:2010)*

EN ISO 13857:2019 *Safety of machinery-Safety distances to prevent hazard zones being reached by upper and lower limbs (ISO 13857:2008)*

EN ISO 14120:2015 *Safety of machinery-Guards-General requirements for the design and construction of fixed and movable guards*

EN 349:1993+A1:2008 *Safety of Machinery-Minimum gaps to avoid crushing of parts of the human body*

EN 809:1998+A1:2009+AC:2011 *Pumps and pump units for liquids-Common safety requirements*

EN 12162:2001+A1:2009 *Liquid pumps-Safety requirements-Procedure for hydrostatic testing*

EN 13445-5:2021 *Unfired pressure vessels-Part 5: Inspection and testing*

ISO-TR 14121 *Safety of machinery-Risk assessment-Part 2: Practical guidance and examples of methods*

Other standards:

NFPA 58 Liquefied Petroleum Gas Code

ANSI/UL 51 Standard for Power-Operated Pumps and Bypass Valves for Anhydrous Ammonia, LP-Gas and Propylene

ANSI/UL79 *Power-Operated Pumps for Petroleum Dispensing Products*

ASTM A29/A29M Standard Specification for General Requirements for Steel Bars, Carbon and Alloy, Hot-Wrought

ASTM A48/A48M Standard Specification for Gray Iron Castings

ASTM A108 Standard Specification for Steel Bar, Carbon and Alloy, Cold-Finished

ASTM A216/A216M Standard Specification for Steel Castings, Carbon, Suitable for Fusion Welding, For High Temperature Service

ASTM A229/A229M Standard Specification for Steel Wire, Quenched and Tempered for Mechanical Springs

ASTM A276/A276M Standard Specification for Stainless Steel Bars and Shapes

ASTM A351/A351-M Standard Specification for Castings, Austenitic, for Pressure-Containing Parts

ASTM A322 Standard Specification for Steel Bars, Alloy, Standard Grades

ASTM A536 Standard Specification for Ductile Iron Castings

ASTM A564/A564M Standard Specification for Hot Rolled and Cold Finished Age-Hardening Stainless Steel

ASTM A 743/A743M Standard Specification for Castings, Iron-Chromium, Nickel, Corrosion Resistant, for General Application

ASTM A890/A890-M Standard Specification for Castings, Iron-Chromium-Nickel-Molybdenum Corrosion-Resistant, Duplex (Austenitic/Ferritic) for General Application

ASTM B633 Standard Specification for Electrodeposited Coatings of Zinc on Iron or Steel

ASTM B849 Standard Specification for Pre-Treatments of Iron or Steel for Reducing Risk of Hydrogen Embrittlement

ASTM B850 Standard Guide for Post-Coating Treatments of Steel for Reducing the Risk of Hydrogen Embrittlement

Note: Any reference to ATEX, ATEX Directive, or EU 2014/34/EU is also a reference to SI 2016 No. 1107.

Any reference to The Machinery Directive or Directive 2006/42/EG is also a reference to The Supply of Machinery (Safety) Regulations 2008 No. 1597.

The equipment described in this document has been evaluated to conform to both Regulation 2023/1230 and Directive 2006/42/EC.

General Description

This equipment is a sliding vane rotary pump designed for pumping a variety of liquids, including potentially toxic, flammable, or explosive liquids. They are available in a variety of sizes from ¾ inch (19 mm) thru 10-inch (254 mm) inlet and outlet and configurations. These include left hand and right-hand rotation, single or double shaft (limited models) and different seals, gaskets, vane, and O-ring materials. These pumps are constructed of a variety of materials including ductile iron and stainless steel. They are available in a variety of pipe connections and sizes. They are not intended to operate as a safety device.



Safety Information and General Warnings

This manual is intended to supplement the standard Blackmer Installation and Operation Manual (IOM) provided with every Blackmer pump. It is provided to give specific information regarding installation and operation in the European Union countries and the United Kingdom. Please refer to the appropriate IOM for installation and operation specifics pertaining to the specific pump installation and operation. This manual is not intended to replace the IOM provided.



General Danger warning

Text marked with this symbol are instructions that if not followed could lead to an increase in the possibility of injury to people or property.



Hot surface warning

Text marked with this symbol are instructions that if not followed could lead to contact by personnel or property with hot surfaces.



Read Operators Manual (IOM) Warning

Text marked with this symbol indicate instructions that are more completely defined in the pump model specific IOM.



Lifting point warning

Text marked with this symbol indicate instructions for safe handling to avoid crushing or pinching hazards.



Pinch Point/Entanglement warning

Text marked with this symbol indicates instructions that if not followed could lead to entanglement or pinch/shearing hazards.



General Danger Warning

Blackmer pumps are designed for the transfer of liquids. They should only be installed and operated by properly trained personnel.



Hot surface warning

Blackmer pumps have surfaces that can get hot, such as the discharge flange, casing, or seal area. Contact with these surfaces could lead to personal injury or property damage. It is the end user's responsibility that personnel are guarded against any contact with hot surfaces. The end user is responsible for any required warning signage.



Read operators manual

Blackmer pumps must only be installed and operated by properly trained personnel. They should never be started or operated before reading and fully understanding the instructions in the Installation, Operation and Maintenance Manual (IOM) and this addendum that was provided with this equipment. If the IOM is not provided or has been misplaced copies are available on the Blackmer website(blackmer.com) or the local Blackmer distributor. Local or national codes may require training before operation. It is the end user's responsibility to ensure that all training requirements are met.



Lifting point warning

Blackmer pumps are heavy. They should only be lifted in accordance with the IOM instructions provided for that machine. Blackmer pumps should never be used as a lifting point for the machinery that they are incorporated into. Pump model Dimension Sheets can be used to determine the approximate weights of the pumps for lifting purposes. Approximate weights can also be found in Table 6. Contact Blackmer for more specific weights based on a particular pump configuration.

Pump drive warning



All Blackmer pumps require a customer supplied drive system. Blackmer does not provide complete ATEX rated drive systems. It is the responsibility of the end user to install a properly rated coupling or drive, and motor. **Proper placarding and protection**

levels for the customer provided drive equipment is the responsibility of the end user.

It is the end user's responsibility to properly anchor the pump to a foundation or frame of sufficient mass and stiffness to accommodate any forces produced. The design of the mounting and installation of these pumps must be performed by qualified individuals familiar with pumps to ensure compliance. Further Blackmer IOM and Technical Bulletins must be followed whenever they are not in conflict with local codes or regulations.



It is the final user's responsibility to ensure that the pump is properly mounted and that the operational limits are not exceeded.



Blackmer pumps are rotation specific and must be operated only in the proper direction. It is mandatory that, prior to initial start-up and after any maintenance that requires removal of power from the installation, a rotational direction check be performed on the motor only with the pump uncoupled.

Installation and Operation Information



1. Blackmer pumps are provided with a pump model specific IOM. This Addendum to the IOM is not intended to replace the information provided in the pump specific IOM. If the information in the Addendum conflicts with the pump specific IOM, the pump specific IOM information should be used.



2. Blackmer pumps are designed to pump a variety of potentially flammable or explosive liquids. It is the end user's responsibility to ensure that both the internal and external pump environments are correctly classified according to Directive 99/92/EC. The zone classification must correspond to the required equipment category as indicated on the pump tag. The internal and external pump environments must be classified assuming all system conditions that may occur.

Purging the pump and piping system with an inert gas before startup and after any maintenance is recommended.

3. It is the end user's responsibility to ensure that the pumped fluid will not:
- self-ignite without the addition of an oxidizer or catalyst
 - is not reactive with the materials of construction"
4. The end user must take all necessary precautions in the calculation of the LEL, UEL, ignition impact energy and auto ignition point of the process fluid and any explosive gases in the vicinity of the installation. Consideration must be given to the energy value of any such mixture.



5. The end user is responsible for the necessary precautions regarding the process liquid as it relates to hazards such as but not limited to:

- Flammability - the upper and lower levels and ease of ignition
- Toxicity - the acceptable concentration levels
- Explosive behavior - the upper and lower level and the energy produced
- Corrosion potential and material compatibility
- Personal Protective Gear requirement
- Placarding and signage requirements for compliance with local, national, and international standards

6. Blackmer pumps are designed to operate within an ambient temperature range of -20°C to 40°C.



7. Only trained operators and maintenance personnel should be allowed to work on the system. All maintenance must be performed in accordance with the IOM and this Addendum. Local and National codes must also be followed when they apply.

8. Most Blackmer pumps have an internal relief valve to limit pump differential pressure. These operate by returning discharge fluid to the inlet side of the pump. Prolonged running in internal relief mode is considered an abnormal operation and could result in higher pump temperature than indicated in Table 1. Installation of a properly sized and adjusted external bypass valve is mandatory for certain Blackmer pump models (consult the pump specific IOM for recommendations). Blackmer recommends Blackmer bypass valves be used on all installations requiring use of a bypass valve.



9. ***Blackmer pumps are not intended for use in a potentially explosive dust atmosphere.*** However, dust is naturally occurring in the environment that this equipment will be installed in. Proper care and/or protection against dust accumulation on the outside of the pump is crucial to maintaining the pump's Ex rating. Periodic inspection and cleaning are required to maintain the rating. ***Do not use high temperature steam or high-pressure water to clean the outside of the pump.***

10. **The end user is responsible for compliance of the installed pump to all applicable International, National and Local codes and standards. This includes the category rating of the final equipment.**



11. It is the end user's responsibility that the drive system is ATEX compliant. Blackmer belts are ISO 1813 compliant for conductivity. The end user is responsible for any static wicks or brushes that may be required to meet local or national codes or standards. Blackmer does not supply ATEX rated couplings.



12. The end user is responsible for all required guarding and safety placarding of the finished machinery.



13. Some models of Blackmer pumps use magnetic drive couplings. Refer to the model specific IOM for details regarding magnetically coupled pumps. The end user is responsible for any safety placarding required by local and national codes.

Supplemental Maintenance Information



To ensure a proper level of explosion resistance and machinery, proper bearing maintenance is required.

Lubrication: Please refer to the pump IOM for details



Failure to follow the published lubrication intervals could result in an elevated explosion risk. To avoid possible entanglement in moving parts do not lubricate while the pump or drive system is running.



Failure to follow safety instructions in the pump specific IOM or this Addendum could lead to an increase in fluid injection risk. When disconnecting/disassembling pumps proper PPE must be worn to protect from high velocity fluid ejection risks. Further proper electrical and hydraulic lockout procedures must be followed to prevent entanglement, pinching, or crushing hazards. It is the end user's responsibility that proper placarding is applied and visible to advise maintenance personnel to these hazards. Inspect the installation at a regular basis for leaks. Never check for leaks with your hands. Personal injury could result.

Improper fastener torque can lead to a higher risk of fluid ejection. Fasteners should be tightened to the torques as specified in the pump specific IOM or to the values in Table 5 if not specified.

Pump shaft seals are a potential source of High-Pressure Fluid Ejection risk as are any joints in pressure containing parts. Never check for leaks with your hands. Personal injury could result.



Bearing Life: To provide the intended level of explosion resistance the shaft bearings must be replaced at 2,000 hour intervals. This interval is based on a pump running at the maximum operating conditions (pressure, speed and temperature) with no cavitation and should be considered a minimum for safe operations. If the pump is operated at lower pressures, speed and temperature this could be an inspection interval and replacement could be on condition if

the bearings are deemed sound to return to service. Conversely if the pump is used in extremely dusty, wet or other adverse conditions this interval should be shortened. Also, if the pump experiences cavitation regularly during operation, bearing life could be reduced. Proper locknut adjustment is required for the bearings to achieve the rated life. A new pump has the bearings adjusted properly when assembled at the factory. Field service requires that the locknuts be adjusted according to the IOM maintenance instructions (see IOM for replacement and adjustment procedure). Failure to follow these instructions could reduce the explosion resistance of the pump and/or create a personal injury/property damage risk.

Sound Measurements: Sound Levels for pumping equipment vary greatly, depending on operating conditions, piping system design, foundation design, etc. Probably the greatest effect on sound level is the presence of cavitation, which is primarily dependent on system design and often increases dramatically during system upset.

You can expect the following sound levels when operating a Blackmer pump at its' maximum rated speed and discharge pressure with NO cavitation. Sound levels are measured at 1 meter from the pump and 1.6 meters from the foundation per European Machinery Directive 2006/42/EC. Maximum Noise Level: 85 dba



ATEX rating information

It is the end user's responsibility that any optional elastomers/O-rings meet the required ATEX temperature code required. Typically, the material should be rated 20°C higher than the required temperature code. Blackmer pumps typically have a temperature rise of 20°C or less above the inlet fluid temperature. Certain Blackmer pump models will require temperature limiting devices to remain Category II equipment.



Possible Misuse Warning: The pump must only be installed in systems designed for its intended use. Blackmer pumps must only be operated within the published pressure and temperature limits. Only properly trained personnel should be allowed to operate or maintain Blackmer pumps.



Mechanical Ignition Sources: Guards, intended to protect from personal injury from rotating components, must be fabricated from ATEX compliant materials to prevent a potential ignition source. The pump and its' drive system must be properly grounded to prevent electrostatic discharge. ATEX certified elastic couplings must be used. These couplings must have a level of protection equivalent or better than that of the pump unit. The pump has internal parts that rub together, these parts require pumped fluid to lubricate the rubbing surfaces. If the pump is run dry for periods of over one-minute, maximum surface temperature may exceed the pump classification temperature. Consequently, every time the pump starts, an operator must check that there is a flow through the pump. Liquid level or flow detector controls may be necessary to prevent dry running. These devices must comply with the standards in force, especially those related to electric devices in explosive atmospheres and/or standard EN 80079-36 related to the protection of non-electric equipment in explosive atmospheres by controlling sources of ignition. Pumps must be properly maintained and lubricated, see IOM (Installation, Operation, & Maintenance Instructions) for service information.



Packing Seal Pumps: Standard (SNP/NP) model pumps and (MLN, MRLN) model pumps are equipped with packing seals which must be properly adjusted, see IOM. All pumps equipped with packings must be equipped with a temperature controlling device to prevent exceeding the maximum surface temperature.



Magnetically Coupled Pumps: (MVP/SMVP/MI/MS) model pumps require additional ignition hazard precautions to prevent an excess temperature condition. Magnetically coupled pumps must be maintained on a regular basis as excessive bushing wear and/or loose magnets can result in rubbing contact with the containment can, consult IOM.

Blackmer pumps are devices whose surface temperature depends on the fluid temperature. Table 1 indicates practical inlet fluid temperature maximums for various pump models. For pumps with steam jackets the steam temperature must not exceed the maximum fluid temperature limits. Table 4 indicates the maximum inlet fluid temperature for the ATEX temperature classification. This should be used to determine if the specific application will meet the classification required for the installation. Refer to Tables 1, 2, and 3 for maximum temperature limits based on materials selected for the pump. Temperature limiting devices are required for NP, MLN, MRLN, MVP, SMVP, SNP, MI, MS, and TX(/D/DI/S/SD/H) models which need to be classified as Category 2. Contact Blackmer Customer Care Group for your specific requirements.

ATEX Marking Information

Table 1. Temperature limits for vane pumps

Maximum Fluid Temperature	Pump Model (inclusive of all sizes, drive options, & relief valve arrangements)
250 ° C*	NP (with jackets or electric heater elements*)
150 ° C	HXLJ (with jackets*), (MLN, MRLN, MLX, MRLX, MRLXW with jackets*), TXV
80 ° C	CRL, CRLR FFNP, GX, GNX, GNXH, HXL, MLN, MRLN, MLX, MRLX, MRLXW, NP, NPH, PV, PVS, SNP, SX, STX, TX, TXD, TXDI, TXS, TXSD, TXH, X, XB, XF, XL, XLF, XRLF, XLW, XRL, XU, MI, MS
80 ° C	LGB, LGF, LGL, LGLD, LGLH, LGRL, LGRLF, MAX, SGL, SGLD, SGRL, SMVP, TLGLF

*For pumps with steam jackets the steam temperature must not exceed the maximum fluid temperature.

**The ATEX temperature class is dependent mostly on fluid temperature (operating conditions). Refer to Table 4

Table 2. Vane temperature limits

Vane Material	Pump Temperature Limit (°C)	Fluid Temperature Limit (°C)
Duravane	115	108
Laminate	176	169
Bronze	260	250*
Iron	260	250*

*Must have temperature limiting equipment installed.

Table 3. O-ring temperature limits

O-ring Material	Material Temperature Limit (°C)	Fluid Temperature Limit (°C)
Nitrile	120	100
FKM	175	155
EPDM	150	130
PTFE	260	250*
Neoprene	105	85

*Must have temperature limiting equipment installed.

Table 4. Pump Inlet fluid temperature requirements for ATEX Temperature Class

Temperature Class	Maximum Inlet Fluid Temperature (°C)	Maximum Surface Temperature (°C)
T2	280	300
T3	180	200
T4	115	135
T5	80	100

*All pumps must be operated within their temperature limits

Table 5. Bolt torque values. If the torque values are listed in the pump specific IOM for a particular bolt use that value. If it is not listed in the pump specific IOM use the table values.

SIZE	RECOMMENDED TORQUE in Ft-Lbs							
	Steel Grade 2		Steel Grade 5		Steel Grade 8		Stainless Steel	
	Coarse	Fine	Coarse	Fine	Coarse	Fine	Coarse	Fine
#8	-	-	-	-	3.7	-	1.4	-
#10	-	-	-	-	5.4	-	2	-
1/4	5.7	6.5	9.1	10	12.9	14	5	5.7
5/16	11.6	12.8	18.7	20	26	29	10	11
3/8	20.7	23.5	33	37	47	53	18	20
7/16	31	37	53	59	75	84	29	32
1/2	50	57	81	91	115	129	44	50
9/16	72	81	117	131	166	185	64	71
5/8	100	114	162	184	229	260	88	100
3/4	178	199	288	321	407	454	156	174
7/8	287	317	464	512	656	724	252	278
1"	430	270	696	762	984	1070	378	414

Table 6. Approximate Vane Pump Weights

Model	Weight (lbs.)	Weight (kg)	Model	Weight (lbs.)	Weight (kg)
CRL1.25	31	14	SX1	36	16
CRL1.5	30	14	STX2	70	32
CRL2	95	43	STX1200	70	32
CRL3	166	75	STX3	146	66
CRLF1.25	39	18	TCRL2	90	41
CRLF1.5	39	18	TCRL3	160	73
CRLR1.25	33	15	TCRL4	210	95
CRLRF1.25	39	18	TCRLF4	273	124
GX2/GNX2	74	34	TLGLD2	94	43
GX2.5/GNX2.5	96	44	TLGLD3	171	78
GX3/GNX3	155	70	TLGLF3	126	57
GX4/GNX4	312	142	TLGLF3HD	125	57
HXL10	2800	1270	TLGLF4	240	109
HXL6	800	363	TX1.5	61	28
HXL8	1100	499	TX2	70	32
HXLJ8	1484	673	TX2.5	92	42
LGB1	27	12	TX206	159	72
LGB1P	24	11	TX3	150	68
LGF1	30	14	TX3-AVA	161	73
LGF1P	30	14	TX4	310	141
LGL1.25	32	15	TX400	200	91
LGL1.5	30	14	TXD2	70	32
LGL2	90	41	TXD2.5	93	42

Model	Weight (lbs.)	Weight (kg)	Model	Weight (lbs.)	Weight (kg)
LGL3	160	73	TXD2.5- AVA	94	43
LGLD4	231	105	TXD3	155	70
LGLF1.25	35	16	TXDO2	74	34
LGRL1.25	32	15	TXSD2.5	97	44
MI3	207	94	TXSD3	155	70
MS3	212	96	TXDI2	72	33
MI4	401	182	TXDI2.5	92	42
MS4	393	178	TXDI3	150	68
NP(H)1.5	51	23	TXI4	310	141
NP(H)2	74	34	TXV2.5	100	45
NP(H)2.5	103	47	TXV3	152	69
NP(H)3	152	69	TXVB2	69	31
NP(H)4	310	141	X(H)2	74	34
NPJ1.5	61	28	X(H)2.5	95	43
NPJ2	83	38	X(H)3	150	68
NPJ2.5	117	53	X(H)4	310	141
NPJ3	162	73	XB1	25	11
SGL1.25	33	15	XB1P	30	14
SGL1.5	32	15	XF1	23	10
SGLD2	90	41	XF1P	30	14
SGLD3	162	73	XL1.25	32	15
SLGD4	231	105	XL1.5	38	17
SMVP100	141	64	XL2	92	42
SMVP15	91	41	XL3	171	78
SMVP200	372	169	XL4	223	101
SMVP30	91	41	XLF1.25	42	19
SMVP300	372	169	XLF1.5	35	16
SMVP50	134	61	XLW1.25	32	15
SNP1.25	45	20	XLW1.5	40	18
SNP1.5	45	20	XLW2	95	43
SNP2	86	39	XLW3	166	75
SNP2.5	130	59	XLW4	227	103
SNP3	152	69	XRL1.25	30	14
			XRLF1.25	42	19
			XRLW1.25	32	15

*Contact factory for a more exact weight of a specific configuration.

Equipment Marking: All pump models are classified Group II Category 2 & 3, Gas Group IIB. Temperature limiting devices are required for NP, MLN, MRLN, SMVP, SNP, MI, MS and TX(/D/DI/S/SD/H) models which need to be classified as Category 2.

Blackmer offers many optional materials that will affect the temperature rating of various pump models. See Table 1 for temperature ratings for various models. See Table 2 and 3 for special conditions for optional materials of construction. See Table 4 for maximum pump inlet fluid temperature for various temperature classifications.

Below is an example pump nameplate. The actual ATEX classification will be engraved on the actual pump nameplate:

SERIAL NUMBER		DATE YY/MM	
MODEL			
blackmer 1809 Century Avenue SW Grand Rapids MI 49503-1530			
C	CE	Ex	II 2 G Ex h IIB T5...T2 Gb X
UK	CA	Ex	II 2 G Ex h IIB T5...T2 Gb X
ASSEMBLED IN U.S.A.			

EU DECLARATION OF CONFORMITY

Directive 2014/34/EU Annex VIII

Herewith we declare that all sizes of Blackmer pump models: CRL, FFNP, GX, GNX, GNXH, HXL, HXLJ, LGB, LGF, LGLH, LGL, LGLD, LGLF, LGRL, LGRLF, MLN, MRLN, MLX, MRLX, MRLXW, NP, NPH, PV, PVS, SGL, SGLD, SGRL, SMVP, SNP, STX, SX, TLGLF, TX, TXD, TXDI, TXS, TXSD, TXH, TXV, X, XB, XF, XH, XL, XLF, XRLF, XLW, XRL, XU, MI, and MS to which this declaration relates are in conformity with the provisions of the ATEX Directive 2014/34/EU. The above equipment is sliding vane, positive displacement pumps designed for fluid transfer applications. These pumps are designed in accordance with EN Standards, using sound engineering principles, manufactured, and assembled in ISO registered facilities. This device is not intended to act as a safety accessory.

Technical files are archived with:

LCIE notified body number 0081, file no. LCIE 154087-717375.

Directive 2014/34/EU *Equipment for potentially explosive atmospheres (ATEX)*

Applied Harmonized Standards:

EN ISO 80079-36:2016 *Explosive Atmosphere-Part 36: Non-electrical equipment for explosive atmospheres-Basic method and requirements*

EN ISO 80079-37:2016 *Explosive Atmosphere-Part 37: Non-electrical equipment for explosive atmospheres-Nonelectrical type of protection constructional safety "c", control of ignition source "b", liquid immersion "k"*

EN 12162:2001+A1:2009 *Liquid Pumps-Safety Requirements-Procedure for hydrostatic testing*

Other Applied Standards

ISO 1813 *Belt drives - V-ribbed belts, joined V-belts and V-belts including wide section belts and hexagonal belts - Electrical conductivity of antistatic belts: Characteristics and methods of test*

NFPA 58 *Liquefied Petroleum Gas Code*

ANSI/UL51 *Standard for Power-Operated Pumps and Bypass Valves for Anhydrous Ammonia, LP-Gas, and Propylene*

ANSI/UL79 *Power-Operated Pumps for Petroleum Dispensing Products*

 9/28/20

Michael Coburn
General Manager

Date:
Grand Rapids, MI USA



EU DECLARATION OF CONFORMITY

Machinery directive 2006/42/EG, Annex II A

Herewith we declare that all sizes of Blackmer pump models: CRL, FFNP, GX, GNX, GNXH, HXL, HXLJ, LGB, LGF, LGLH, LGL, LGLD, LGLF, LGRL, LGRLF, MLN, MRLN, MLX, MRLX, MRLXW, NP, NPH, PV, PVS, SGL, SGLD, SGRL, SMVP, SNP, STX, SX, TLGLF, TX, TXD, TXDI, TXS, TXSD, TXH, TXV, X, XB, XF, XH, XL, XLF, XRLF, XLW, XRL, XU, MI, and MS to which this declaration relates are in conformity with the provisions of the Machinery Directive, 2006/42/EG. The above equipment are sliding vane, positive displacement pumps designed for fluid transfer applications. This device is not intended to act as a safety accessory.

Blackmer further declares that the above listed pumps are designed in accordance with EN Standards, using sound engineering practices, are designed, manufactured, and assembled in ISO registered facilities. These pumps are in compliance with all applicable harmonized/designated standards and therefore all pumps carry the CE marking.

Applied Harmonized/Designated Standards:

EN 809:1998+A1:2009+AC:2011 *Pumps and pump units for liquids-Common safety requirements*

EN 12162:2001+A1:2009 *Liquid pumps-Safety requirements-Procedure for hydrostatic testing*

EN ISO 12100:2010 *Safety of Machinery-General principles for design. Risk assessment and risk reduction (ISO 12100-1:2010)*

Other Applied Standards

ISO-TR 14121 *Safety of machinery-Risk assessment-Part 2: Practical guidance and examples of methods*

 9/28/26

Michael Coburn
General Manager

Date:
Grand Rapids, MI USA



EU DECLARATION OF CONFORMITY

Machinery Regulation 2023/1230, Annex V A

Herewith we declare that all sizes of Blackmer pump models: CRL, FFNP, GX, GNX, GNXH, HXL, HXLJ, LGB, LGF, LGLH, LGL, LGLD, LGLF, LGRL, LGRLF, MLN, MRLN, MLX, MRLX, MRLXW, NP, NPH, PV, PVS, SGL, SGLD, SGRL, SMVP, SNP, STX, SX, TLGLF, TX, TXD, TXDI, TXS, TXSD, TXH, TXV, X, XB, XF, XH, XL, XLF, XRLF, XLW, XRL, XU, MI, and MS to which this declaration relates are in conformity with the provisions of the Machinery Regulation, 2023/1230. The above equipment are sliding vane, positive displacement pumps designed for fluid transfer applications. This device is not intended to act as a safety accessory.

Blackmer further declares that the above listed pumps are designed in accordance with EN Standards, using sound engineering practices, are designed, manufactured, and assembled in ISO registered facilities. These pumps are in compliance with all applicable harmonized/designated standards and therefore all pumps carry the CE marking.

Technical files are archived with Blackmer per Annex IV of 2023/1230.

Applied Harmonized/Designated Standards:

EN 809:1998+A1:2009+AC:2011 *Pumps and pump units for liquids-Common safety requirements*

EN 12162:2001+A1:2009 *Liquid pumps-Safety requirements-Procedure for hydrostatic testing*

EN ISO 12100:2010 *Safety of Machinery-General principles for design. Risk assessment and risk reduction (ISO 12100-1:2010)*

Other Applied Standards

ISO-TR 14121 *Safety of machinery-Risk assessment-Part 2: Practical guidance and examples of methods*

 9/28/26

Michael Coburn
General Manager

Date:
Grand Rapids, MI USA



EU DECLARATION OF INN CORPORATION

Directive 2014/34/EU Annex VIII, Regulation 2023/1230 Annex VB

Herewith we declare that all components of Blackmer pump models: CRL, FFNP, GX, GNX, GNXH, HXL, HXLJ, LGB, LGF, LGLH, LGL, LGLD, LGLF, LGRL, LGRLF, MLN, MRLN, MLX, MRLX, MRLXW, NP, NPH, PV, PVS, SGL, SGLD, SGRL, SMVP, SNP, STX, SX, TLGLF, TX, TXD, TXDI, TXS, TXSD, TXH, TXV, X, XB, XF, XH, XL, XLF, XRLF, XLW, XRL, XU, MI, and MS to which this declaration relates are in conformity to the Directive and Regulation listed above. The above equipment is sliding vane, positive displacement pumps designed for fluid transfer applications. The components are not intended to act as a safety device.

These components must not be placed into service until the machine into which it is incorporated has been declared in conformity with the provision of Directive 2014/34/EU, The ATEX Directive, SI 2016 No. 1107, The Equipment and Protective Systems for use in Potentially Explosive Atmospheres Regulations, 2006/42/EC The Machinery Directive, 2023/1230 The Machinery Regulation, and The Supply of Machinery (Safety) Regulations 2008 No. 1597.

Blackmer further declares that the above listed pumps/components are designed in accordance with EN Standards, using sound engineering practices, are designed, manufactured, and assembled in ISO registered facilities. These components are not marked with CE/UKCA marks.

Technical files are archived with Blackmer per Annex IV of 2023/1230.

Applied Harmonized/Designated Standards:

EN 809:1998+A1:2009+AC:2011 *Pumps and pump units for liquids-Common safety requirements*

EN 12162:2001+A1:2009 *Liquid pumps-Safety requirements-Procedure for hydrostatic testing*

EN ISO 12100:2010 *Safety of Machinery-General principles for design. Risk assessment and risk reduction (ISO 12100-1:2010)*

Other Applied Standards

ISO-TR 14121 *Safety of machinery-Risk assessment-Part 2: Practical guidance and examples of methods*

 9/28/26

Michael Coburn
General Manager

Date:
Grand Rapids, MI USA



UK DECLARATION OF CONFORMITY

SI 2016 No. 1107

Herewith we declare that all sizes of Blackmer pump models: CRL, FFNP, GX, GNX, GNXH, HXL, HXLJ, LGB, LGF, LGLH, LGL, LGLD, LGLF, LGRL, LGRLF, MLN, MRLN, MLX, MRLX, MRLXW, NP, NPH, PV, PVS, SGL, SGLD, SGRL, SMVP, SNP, STX, SX, TLGLF, TX, TXD, TXDI, TXS, TXSD, TXH, TXV, X, XB, XF, XH, XL, XLF, XRLF, XLW, XRL, XU, MI, and MS to which this declaration relates are in conformity with the provisions of UKSI 2016 No. 1107 *The Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2016*

The above equipment is sliding vane, positive displacement pumps designed for fluid transfer applications. These pumps are designed using sound engineering principles, manufactured, and assembled in ISO registered facilities. This device is not intended to act as a safety accessory. Technical files are archived with;

Element Materials Technology Warwick Ltd, notified body 0891, file no. 0891-014

UKSI 2016 No. 1107 *The Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2016*

Applied Harmonized/Designated Standards:

EN ISO 80079-36:2016 *Explosive Atmosphere-Part 36: Non-electrical equipment for explosive atmospheres-Basic method and requirements*

EN ISO 80079-37:2016 *Explosive Atmosphere-Part 37: Non-electrical equipment for explosive atmospheres-Nonelectrical type of protection constructional safety "c", control of ignition source "b", liquid immersion "k"*

EN 12162:2001+A1:2009 *Liquid Pumps-Safety Requirements-Procedure for hydrostatic testing*

Other Applied Standards

ISO 1813 *Belt drives - V-ribbed belts, joined V-belts and V-belts including wide section belts and hexagonal belts - Electrical conductivity of antistatic belts: Characteristics and methods of test*

NFPA 58 *Liquefied Petroleum Gas Code*

ANSI/UL51 *Standard for Power-Operated Pumps and Bypass Valves for Anhydrous Ammonia, LP-Gas, and Propylene*

ANSI/UL79 *Power-Operated Pumps for Petroleum Dispensing Products*

 9/28/26

Michael Coburn
General Manager

Date:
Grand Rapids, MI USA



UK DECLARATION OF CONFORMITY

As defined by the:

Supply of Machinery (Safety) Regulations 2008 No. 1597

Herewith we declare that all sizes of Blackmer pump models: CRL, FFNP, GX, GNX, GNXH, HXL, HXLJ, LGB, LGF, LGLH, LGL, LGLD, LGLF, LGRL, LGRLF, MLN, MRLN, MLX, MRLX, MRLXW, NP, NPH, PV, PVS, SGL, SGLD, SGRL, SMVP, SNP, STX, SX, TLGLF, TX, TXD, TXDI, TXS, TXSD, TXH, TXV, X, XB, XF, XH, XL, XLF, XRLF, XLW, XRL, XU, MI, and MS to which this declaration relates are in conformity with the provisions of the Supply of Machinery (Safety) Regulations 2008

The above equipment are sliding vane, positive displacement pumps designed for fluid transfer applications. This device is not intended to act as a safety accessory.

Blackmer further declares that the above listed pumps are designed in accordance with EN and UK Standards, using sound engineering practices, are designed, manufactured, and assembled in ISO registered facilities. These pumps are in compliance with all applicable harmonized/designated standards and therefore all pumps carry the UKCA marking.

Applied Harmonized/Designated Standards:

EN 809:1998+A1:2009+AC:2011 *Pumps and pump units for liquids-Common safety requirements*

EN 12162:2001+A1:2009 *Liquid pumps-Safety requirements-Procedure for hydrostatic testing*

EN ISO 12100:2010 *Safety of Machinery-General principles for design. Risk assessment and risk reduction (ISO 12100-1:2010)*

Other Applied Standards

ISO-TR 14121 *Safety of machinery-Risk assessment-Part 2: Practical guidance and examples of methods*

 9/28/20

Michael Coburn
General Manager

Date:
Grand Rapids, MI USA



Notes:

Dover Pumps & Process Solutions Segment Inc. dba Blackmer
PSG Grand Rapids
1809 Century Avenue S.W.
Grand Rapids, Michigan 49503-1530
United States of America
Tel: (616) 241-1611
Fax: (616) 241-3752

