



Page Number	105-027
Effective	Nov 2007
Replaces	Oct 2001
Section	105


### 350 RPM

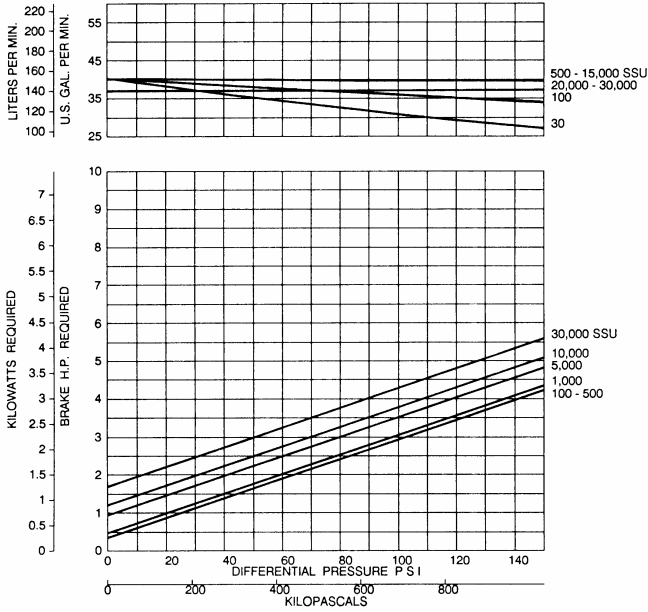


### 280 RPM

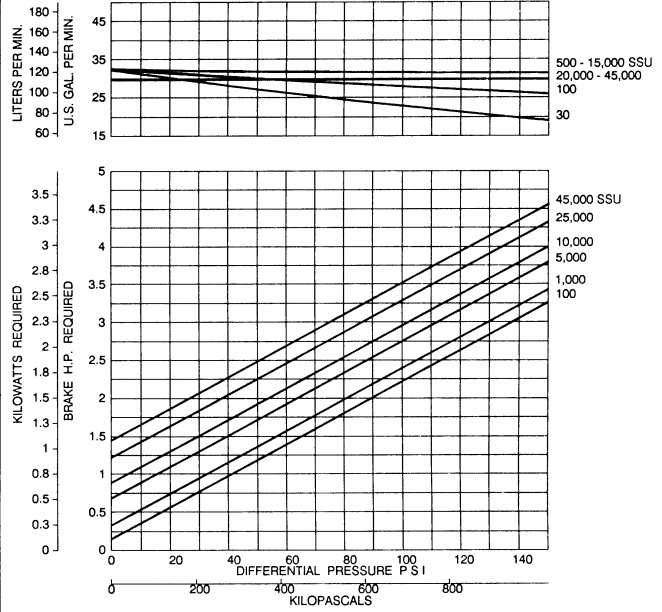

### 230 RPM

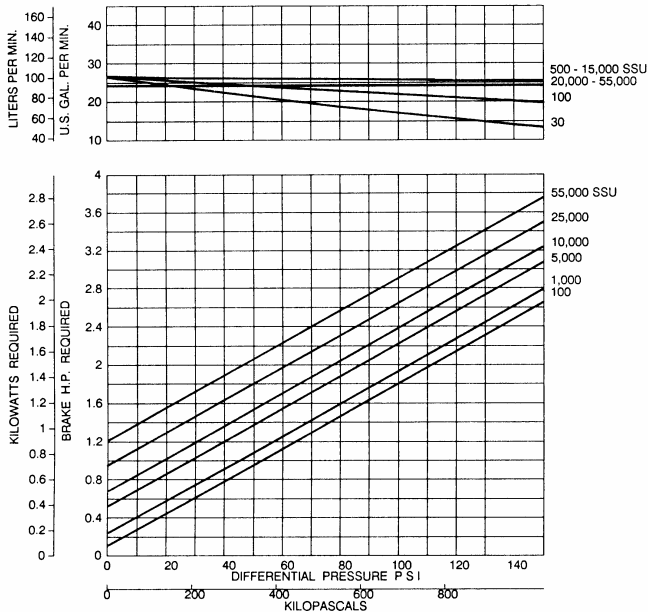

### 190 RPM

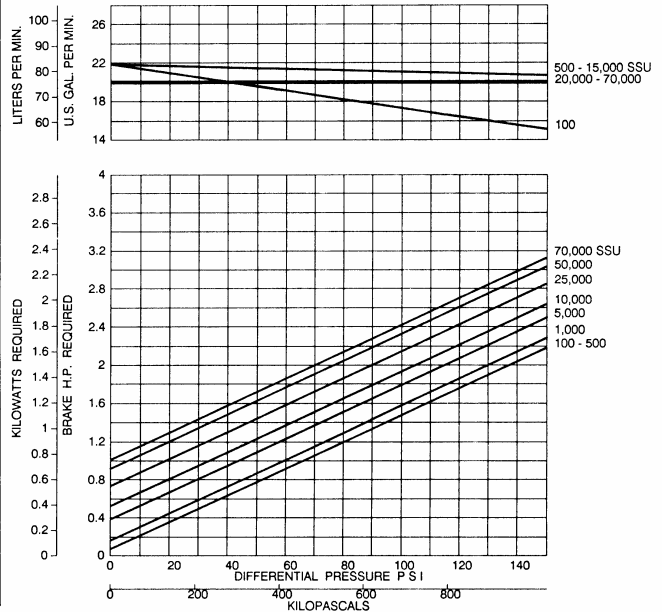

**NOTE:** Maximum fluid viscosity for the XLW pump models is 75,000 SSU (15,750 Cs).


**NOTE:** Blackmer Characteristic Curves are based on Brake Horsepower (bhp). To determine Motor Horsepower, drive train inefficiencies must be added to the bhp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.


# CHARACTERISTIC CURVES

Models: XLW2


## 155 RPM

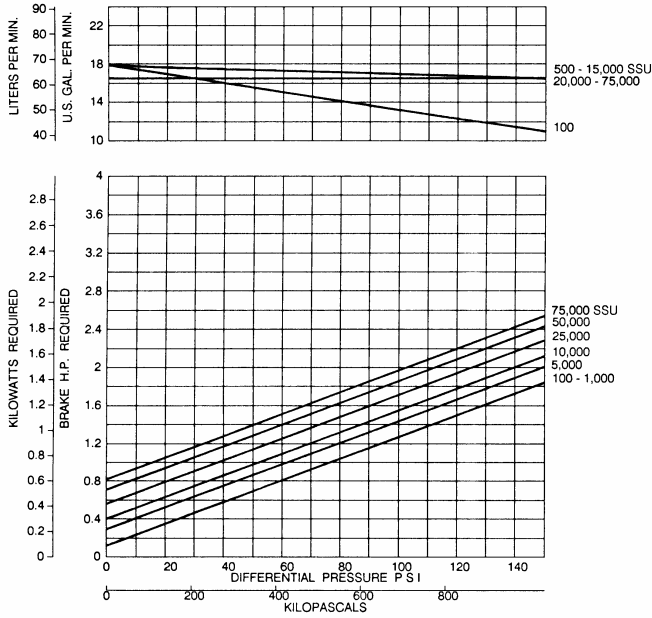


## 125 RPM

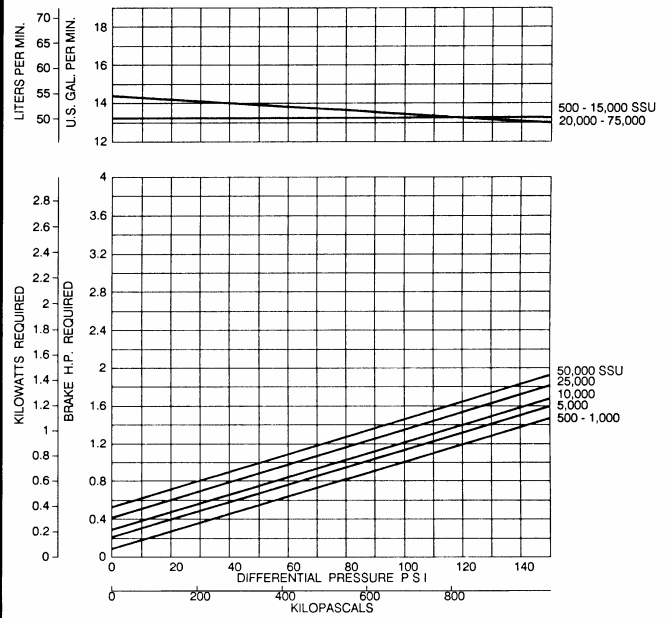

## 84 RPM

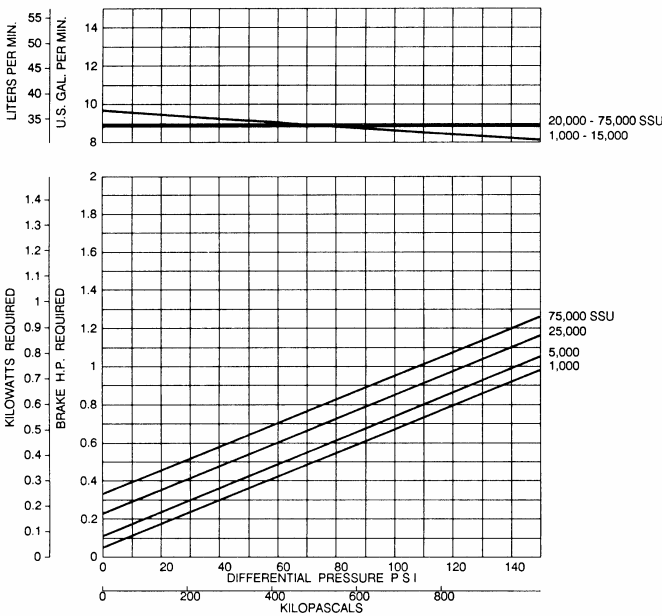

## 56 RPM

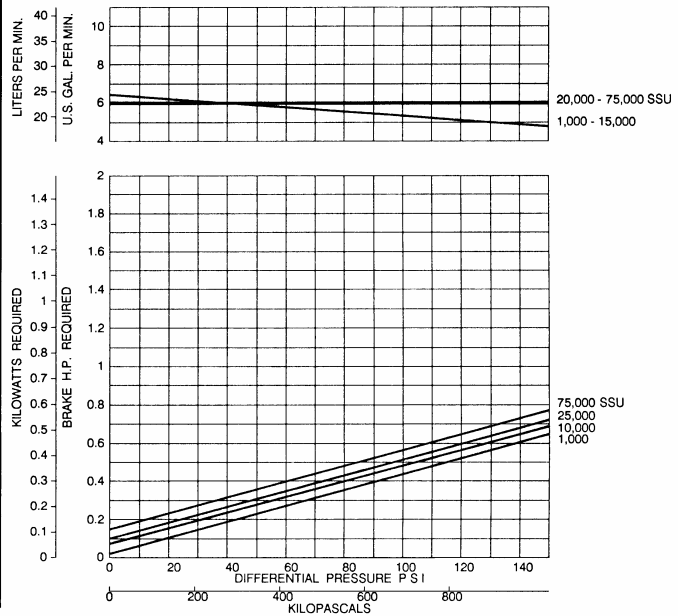

**NOTE:** Maximum fluid viscosity for the XLW pump models is 75,000 SSU (15,750 Cs).

**NOTE:** Blackmer Characteristic Curves are based on Brake Horsepower (bhp). To determine Motor Horsepower, drive train inefficiencies must be added to the bhp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

