



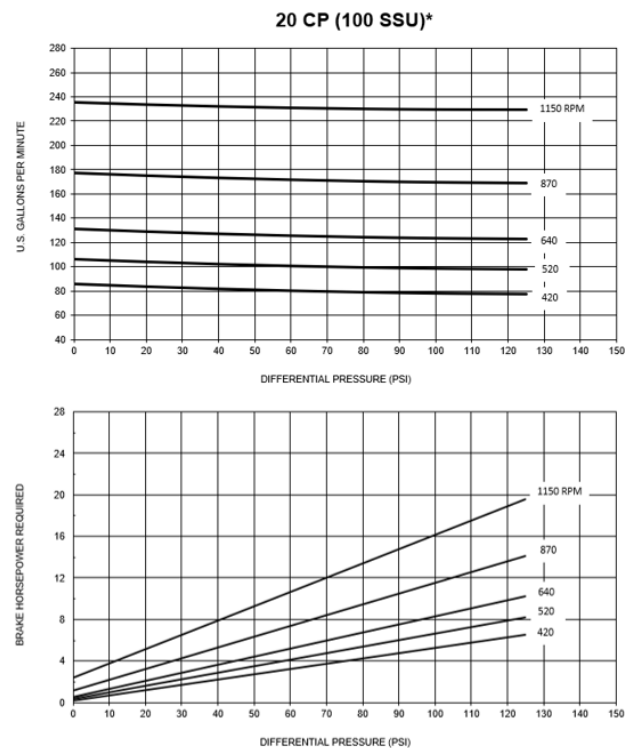

## CHARACTERISTIC CURVES

Model: SMVP200C

Page Number	108-039
Effective	June 2025
Replaces	July 2015
Section	108

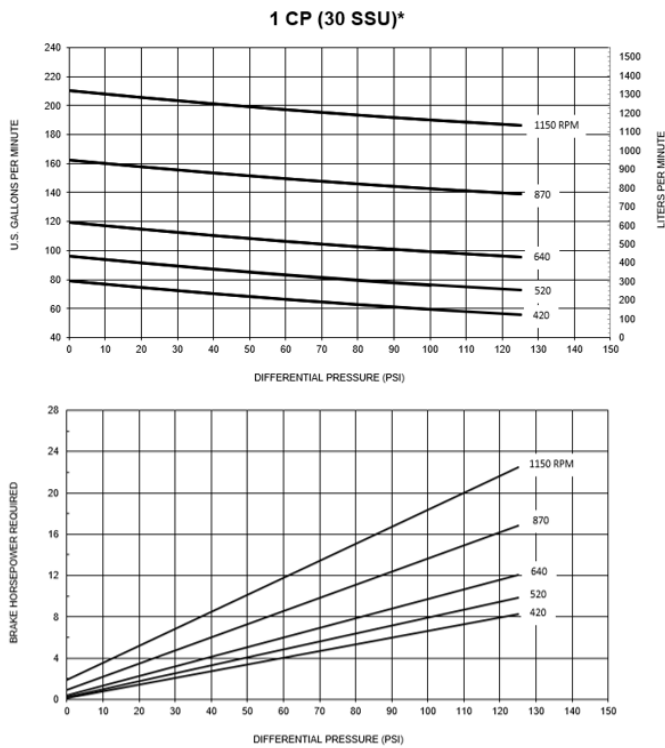

**NOTE:** The magnets can be used for operating temperatures up to 200°F (93°C). For higher temperatures, consult factory.



Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

\*Centipoise (CP) to SSU conversion is based on a specific gravity of 1.0.

## CHARACTERISTIC CURVES

Model: **SMVP200C**

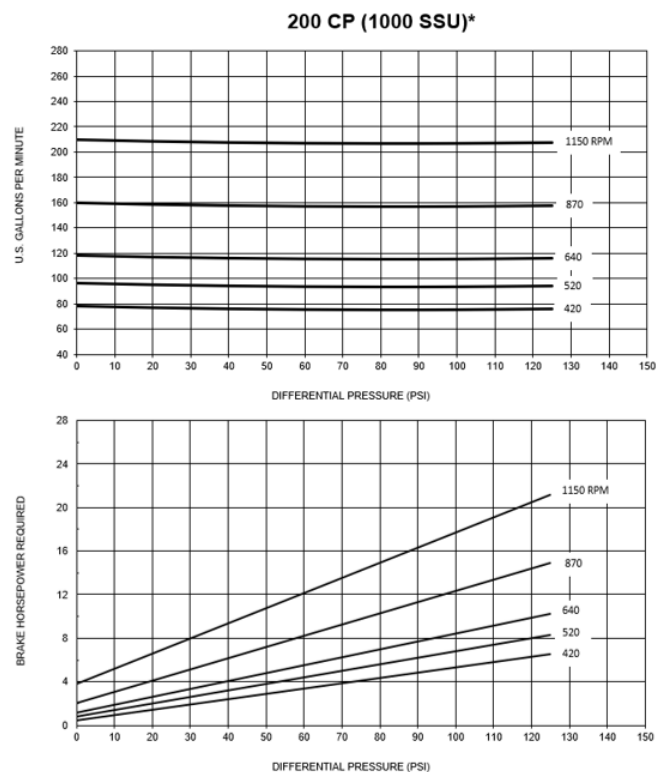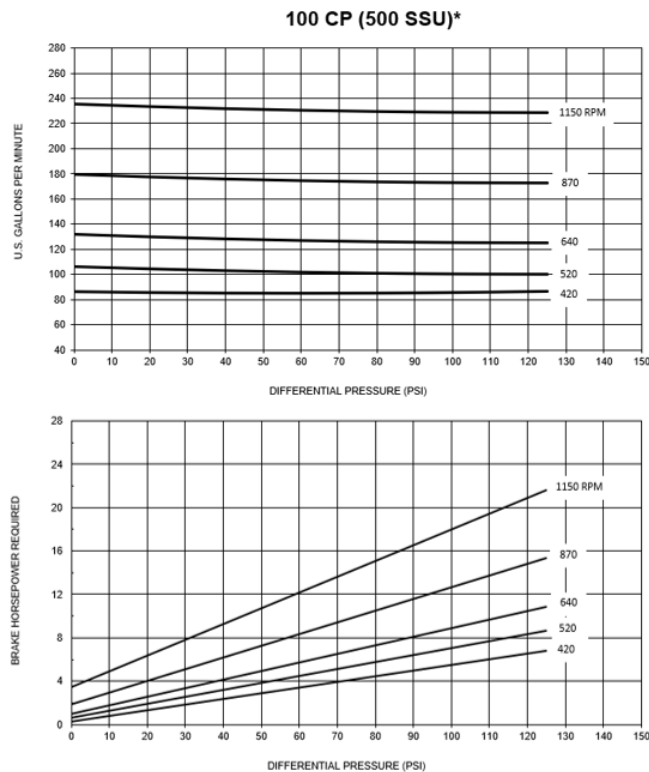

**NOTE:** The magnets can be used for operating temperatures up to 200°F (93°C). For higher temperatures, consult factory.

Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.



Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

\*Centipoise (CP) to SSU conversion is based on a specific gravity of 1.0.



## CHARACTERISTIC CURVES

Model: SMVP200C

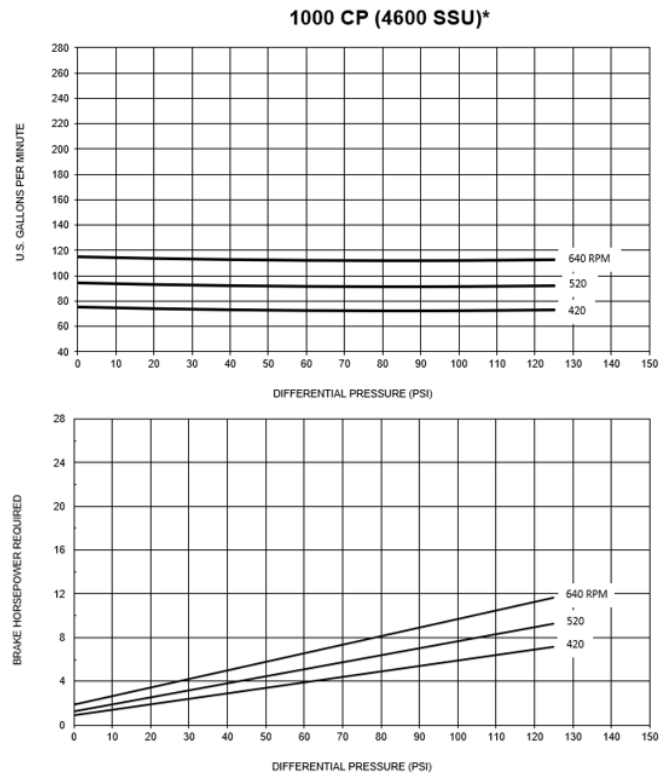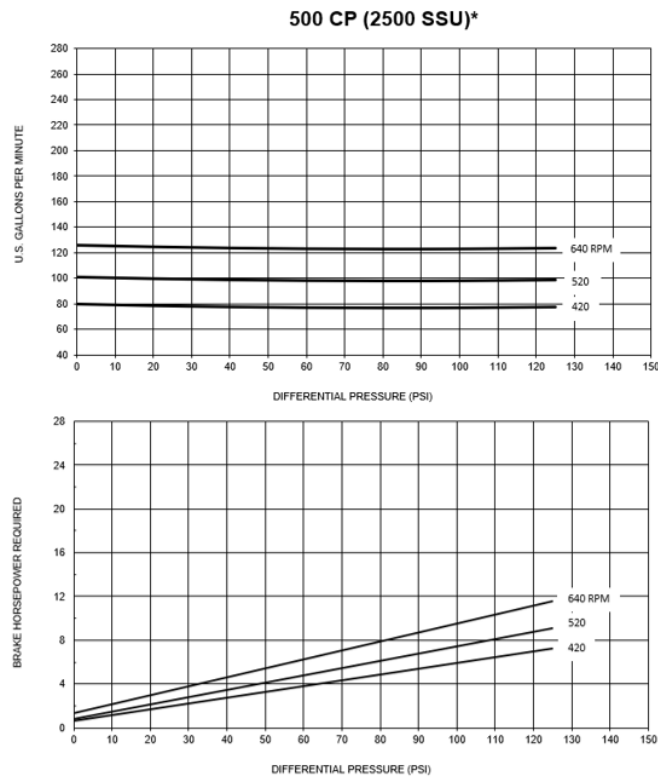

**NOTE:** The magnets can be used for operating temperatures up to 200°F (93°C). For higher temperatures, consult factory.

Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.



Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

\*Centipoise (CP) to SSU conversion is based on a specific gravity of 1.0.



## CHARACTERISTIC CURVES

Model: **SMVP200C**

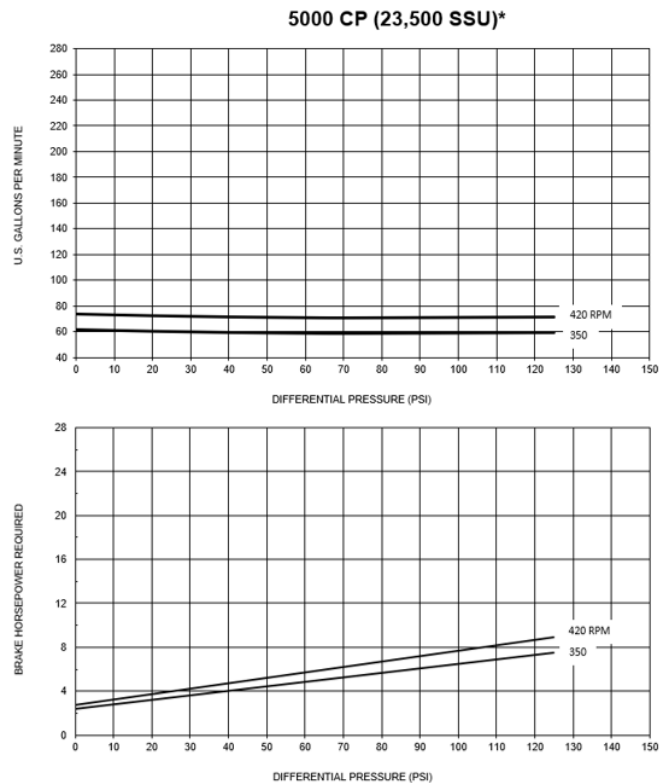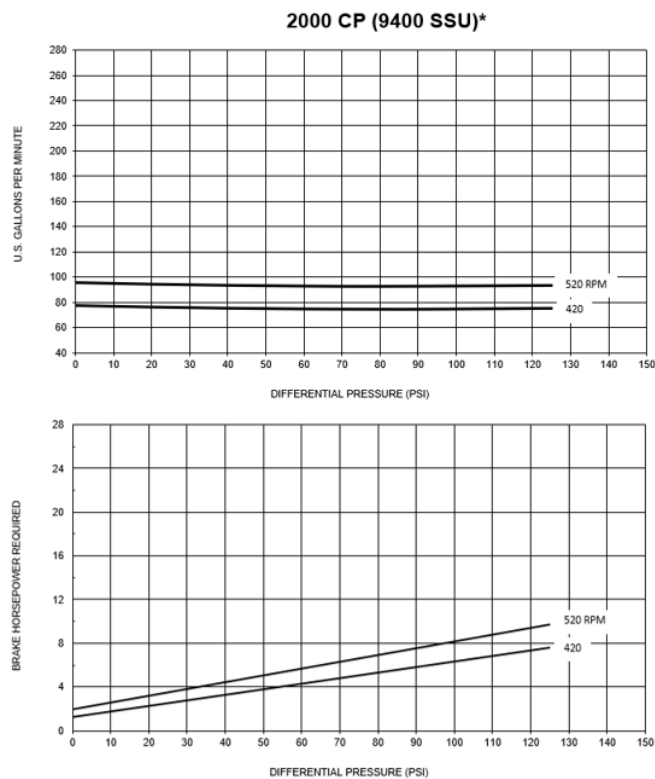

**NOTE:** The magnets can be used for operating temperatures up to 200°F (93°C). For higher temperatures, consult factory.

Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

\*Centipoise (CP) to SSU conversion is based on a specific gravity of 1.0.

