



## CHARACTERISTIC CURVES



Model: SMVP300C

Page Number 108-041

Effective Jun 2025

Replaces Mar 2018

Section 108

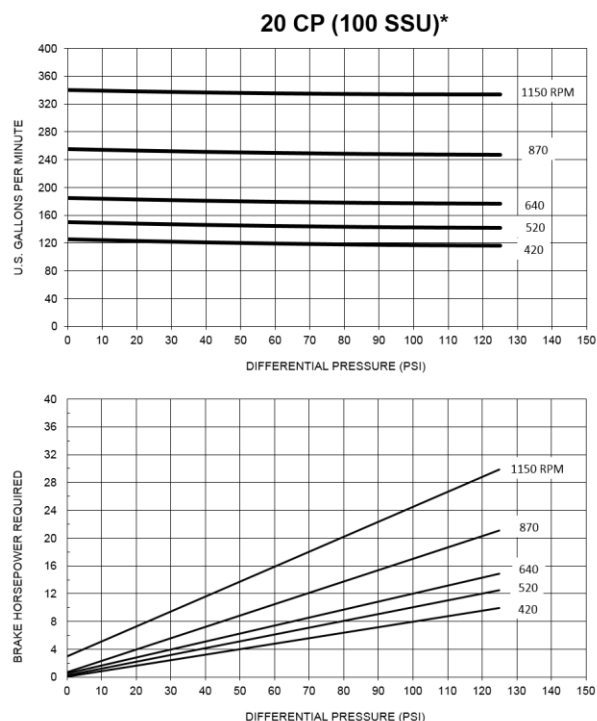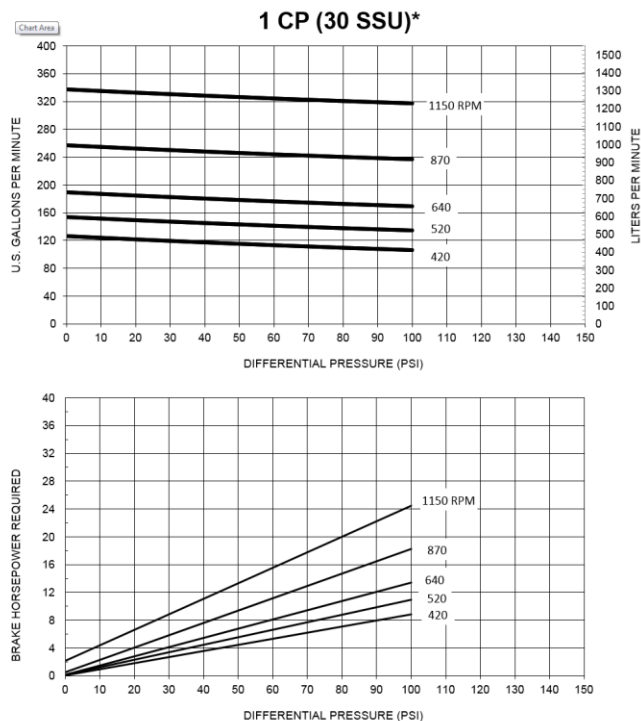

**NOTE:** The magnets can be used for operating temperatures up to 200°F (93°C). For higher temperatures, consult factory.



Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

\*Centipoise (CP) to SSU conversion is based on a specific gravity of 1.0.

## CHARACTERISTIC CURVES

Model: SMVP300C

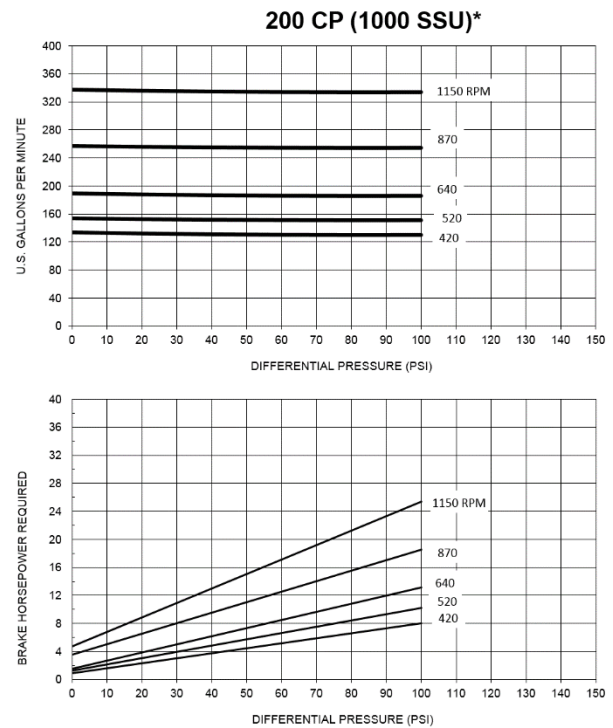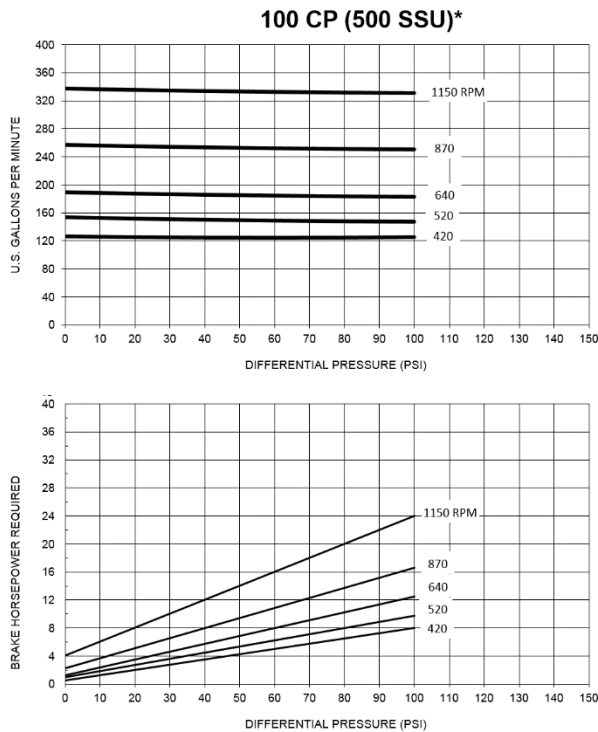

**NOTE:** The magnets can be used for operating temperatures up to 200°F (93°C). For higher temperatures, consult factory.

Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.



Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

\*Centipoise (CP) to SSU conversion is based on a specific gravity of 1.0.



## CHARACTERISTIC CURVES

Model: SMVP300C

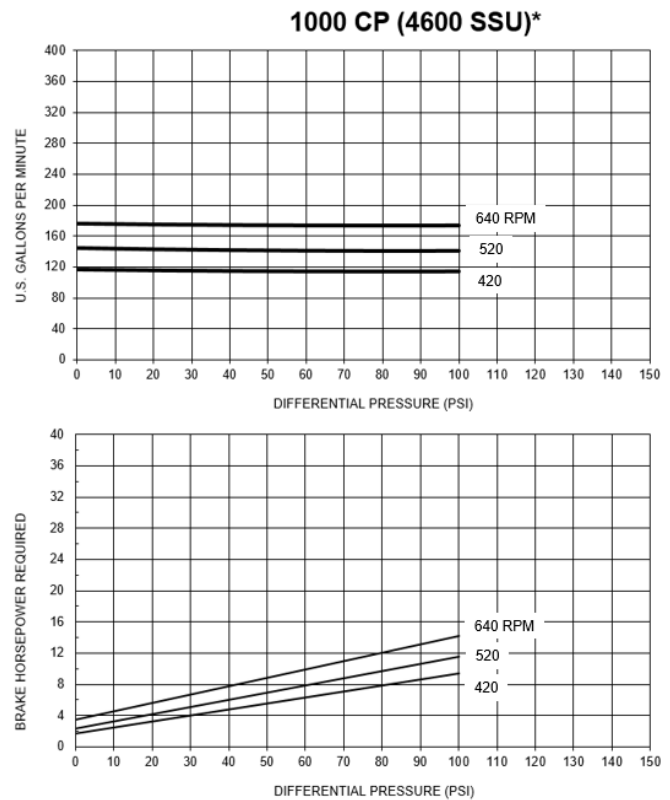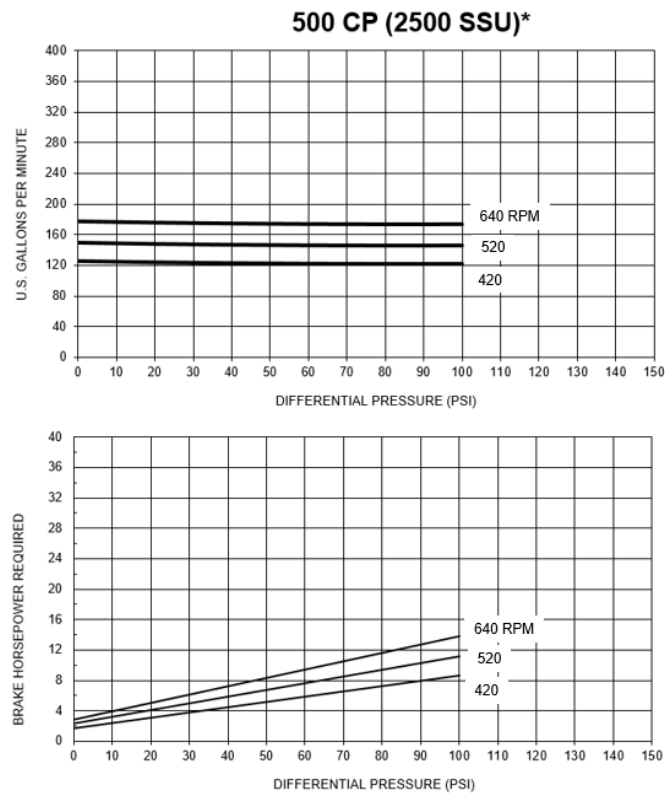

**NOTE:** The magnets can be used for operating temperatures up to 200°F (93°C). For higher temperatures, consult factory.

Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.



Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

\*Centipoise (CP) to SSU conversion is based on a specific gravity of 1.0.



## CHARACTERISTIC CURVES

Model: SMVP300C

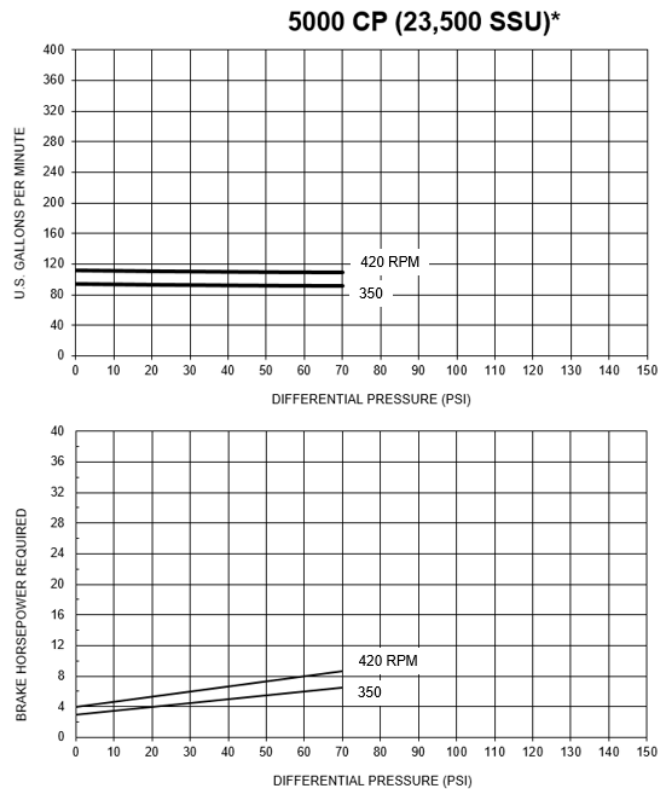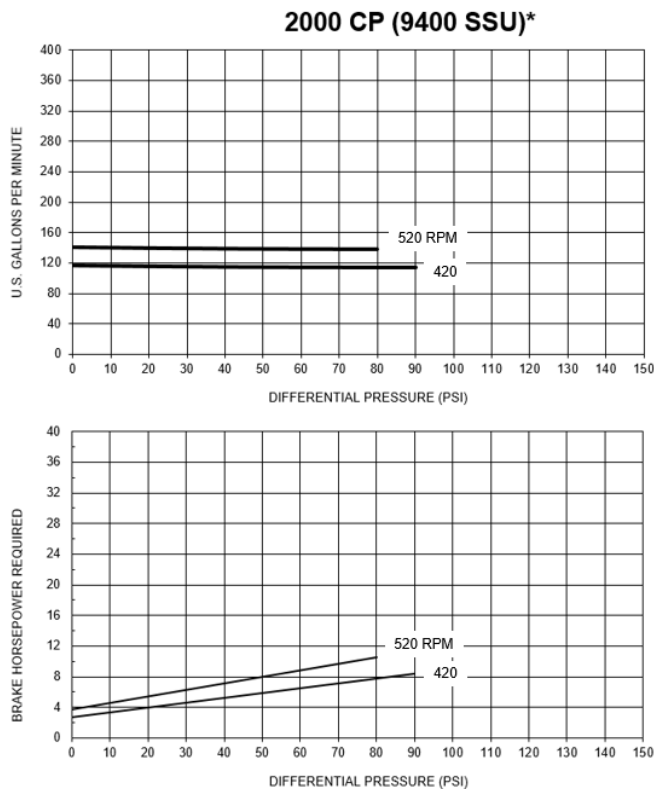

**NOTE:** The magnets can be used for operating temperatures up to 200°F (93°C). For higher temperatures, consult factory.

Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

\*Centipoise (CP) to SSU conversion is based on a specific gravity of 1.0.

