


BLACKMER V SERIES INTERNAL GEAR ASPHALT PUMP PERFORMANCE CURVE

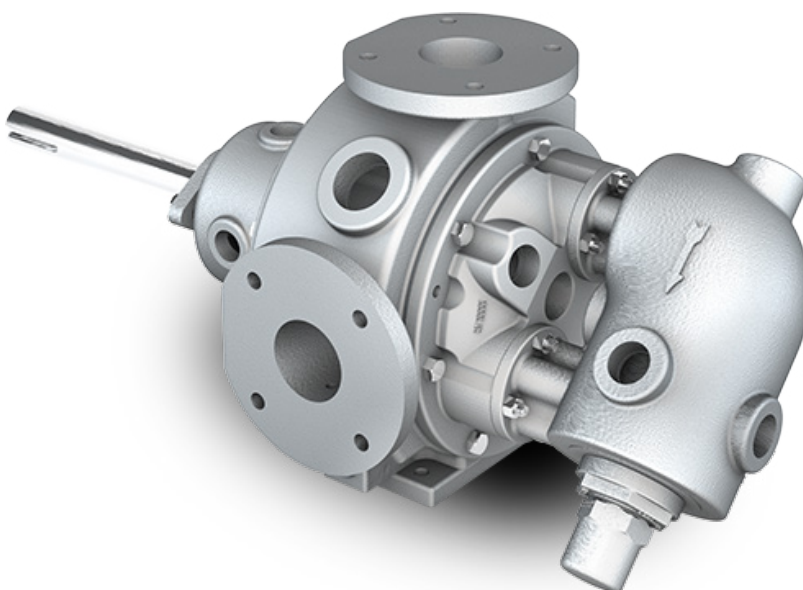

Contents:

Note: Click on the section or the viscosity to access that page of the document.

How to Use this Guide.....	4
Section 1: V2-55.....	5
Iron and Steel Construction	
20 Centistokes	
100 Centistokes	
Section 2: V2-133.....	7
Iron and Steel Construction	
20 Centistokes	
100 Centistokes	
1,000 Centistokes	
Section 3: V2-254.....	10
Iron and Steel Construction	
20 Centistokes	
100 Centistokes	
1,000 Centistokes	
Section 4: V2-423.....	13
Iron and Steel Construction	
20 Centistokes	
100 Centistokes	
1,000 Centistokes	

How to Use this Guide?



Thank you for considering Blackmer Gear! This guide is intended to help you begin selecting a pump based on desired flow rate and/or drive power needs. Start by determining which pump size will best suit your application by using the specifications and performance data below. We've also included a competitor cross reference table in case you're coming to us from one of several other popular brands. From there, use the table of contents to navigate to the appropriate section based on fluid viscosities. The section headers in the Table of Contents are clickable, as are the lists of viscosities to take you directly to the section you're most interested in. We've also included links back to the Table of Contents at the bottom right corner of each curve page.



If you're new to the Blackmer family of products, welcome! If you're a long time user, welcome back!"



Specification		
Model	Port Sizes'	Pump Only
V2-55	2-1/2" ANSI	180 lb (82 kg)
V2-133	3" ANSI	350 lb (160 kg)
V2-254	4" ANSI	530 lb (240 kg)
V2-423	5" ANSI	750 lb (340 kg)
(1) Flanged connections meet Class 125# ANSI		



Performance			
Model	RPM	GPM (M ³ /H)	Max Discharge Pressure Psig (Bar)'
V2-55	420	90 (20)	100 (6.9) > 20 cSt
V2-133	350	200 (45)	75 (5.2) > 20 cSt
V2-254	280	280 (64)	75 (5.2) > 20 cSt
V2-423	280	450 (102)	75 (5.2) > 20 cSt
(1) Maximum pressure listed reflects maximum differential pressure and maximum allowable working pressure			



Competitor Model Cross Reference			
Blackmer V Series	Blackmer G Series	Blackmer E Series	Viking®
V2-55	G1-55	E1-55	LQ34
V2-133	G1-133	E1-133	Q34
V2-254	-	-	M34
V2-423	-	-	N34
Note: See the Blackmer Competitor Dimensional Comparison Guide for detailed dimensional information. Viking® is a registered trademark of Viking Pump, Inc., a unit of IDEX Corporation.			

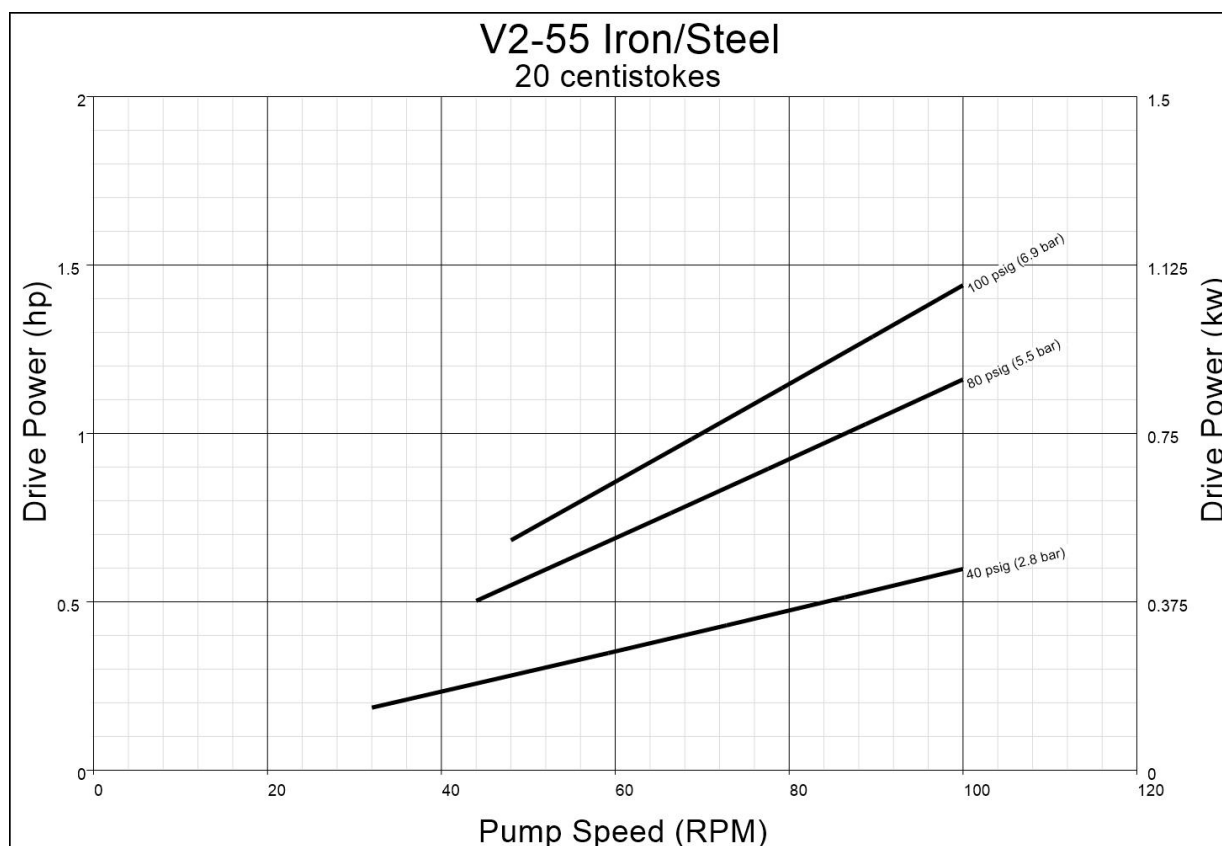
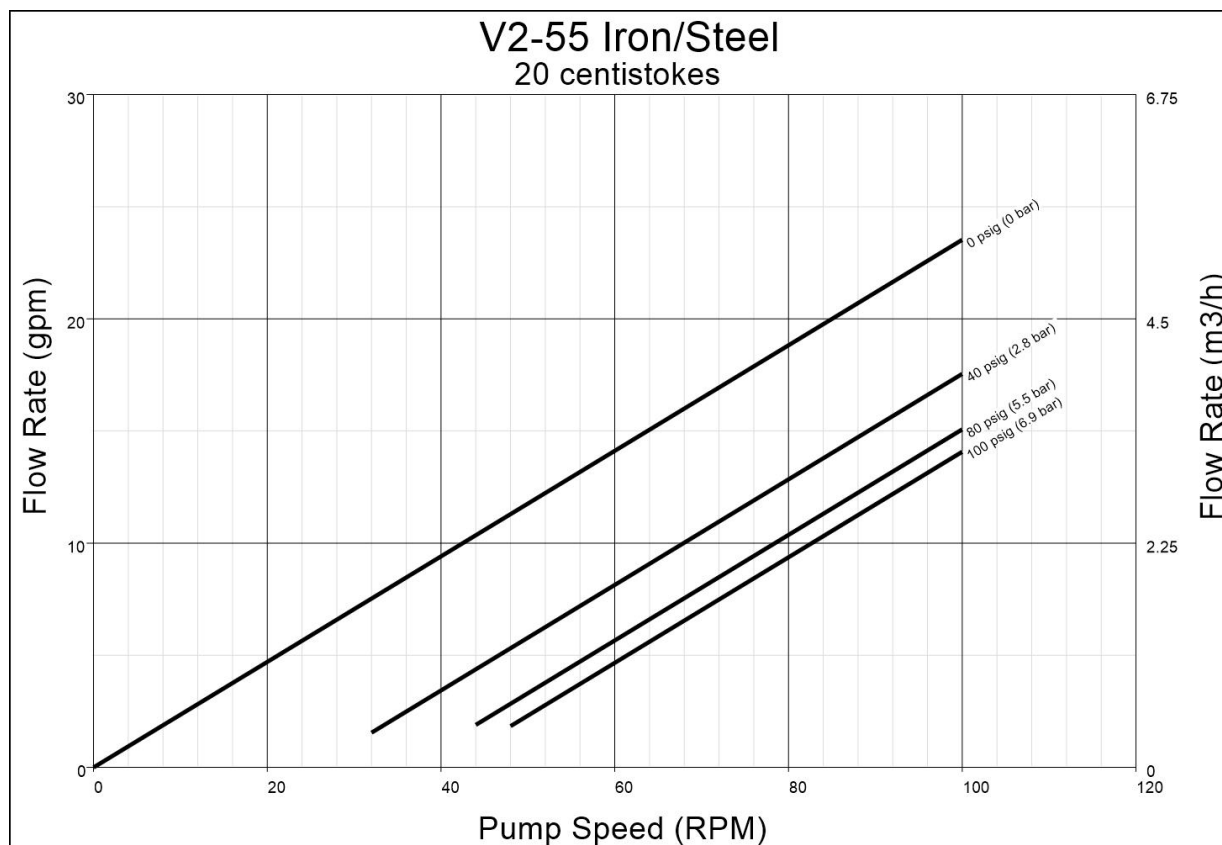


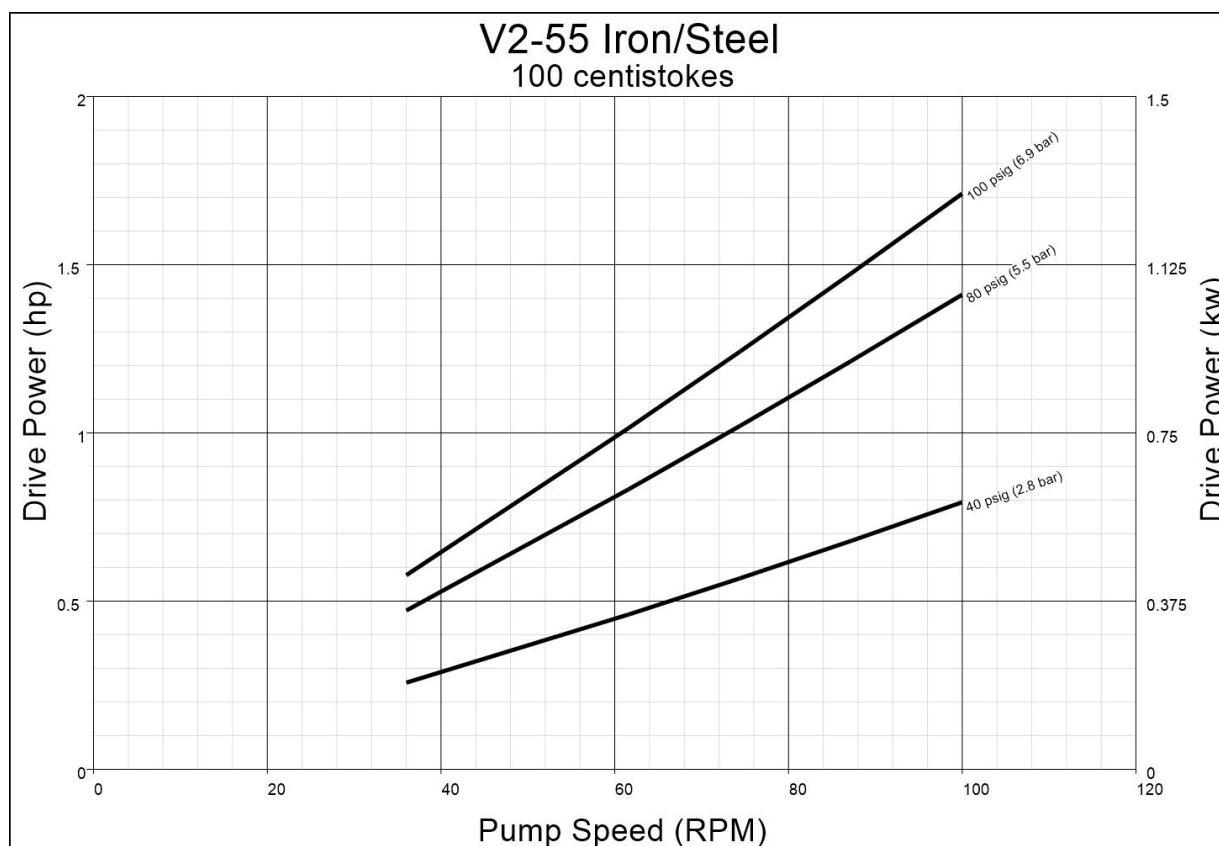
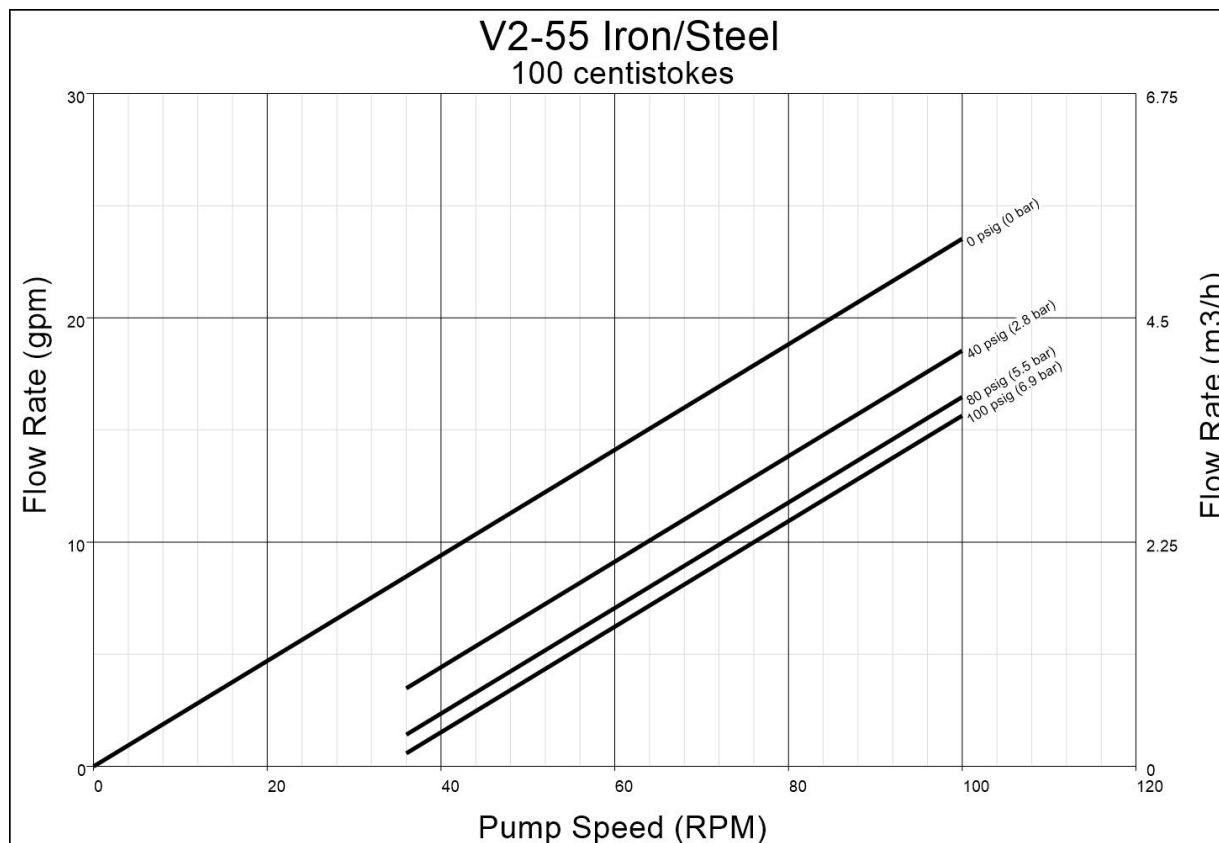


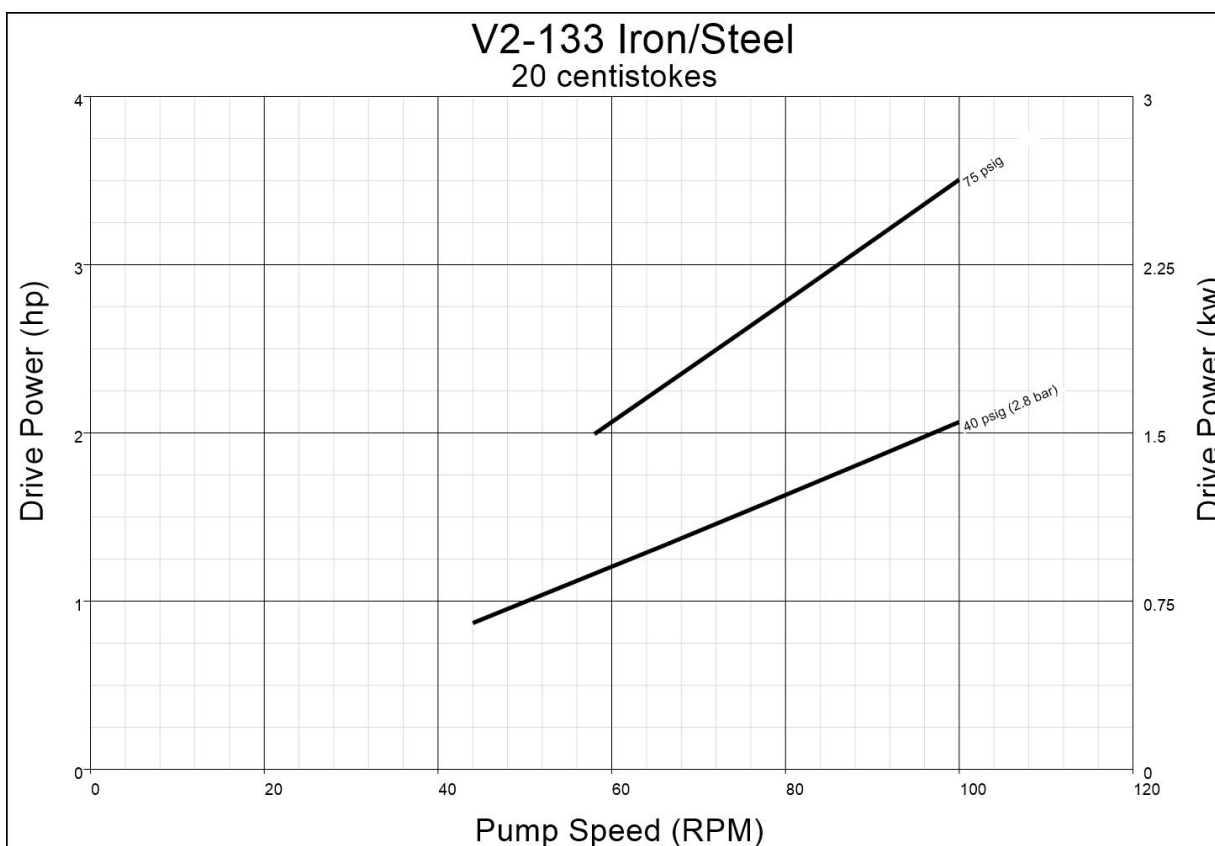
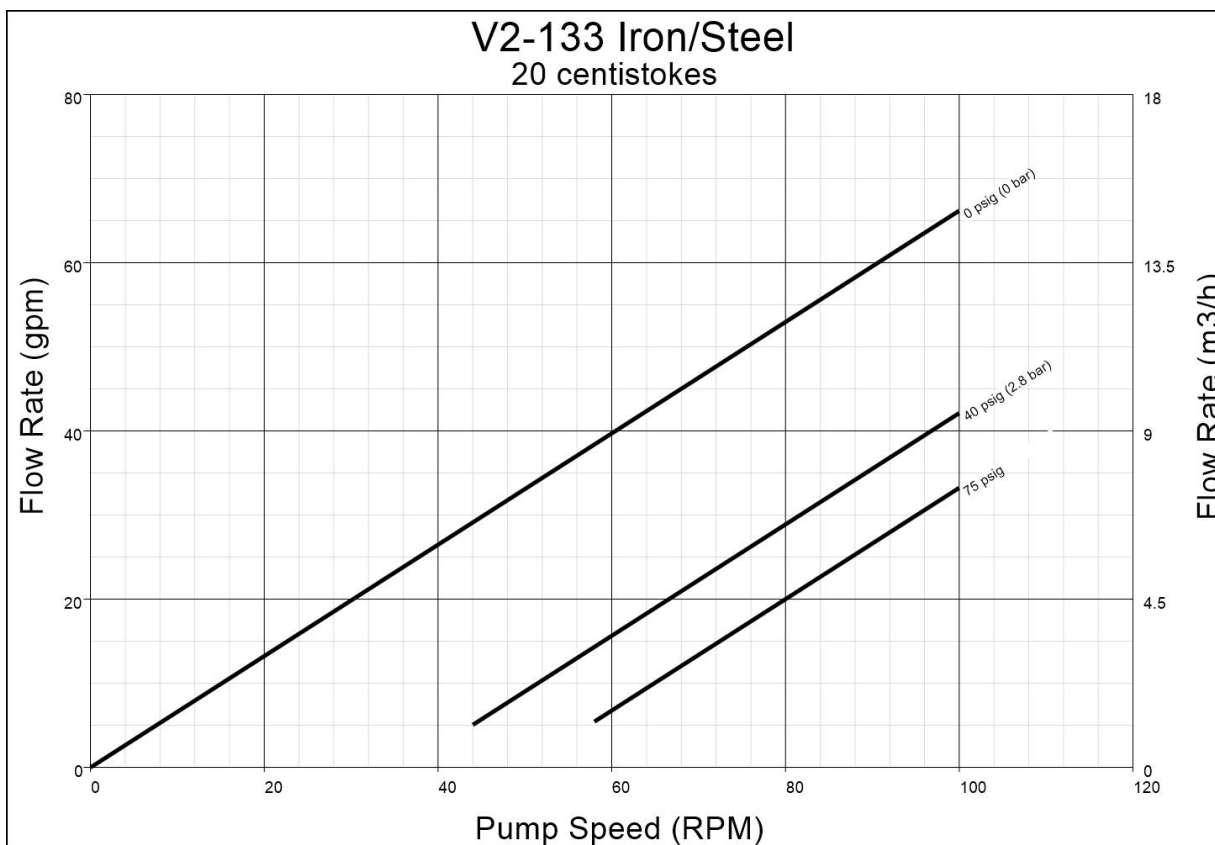


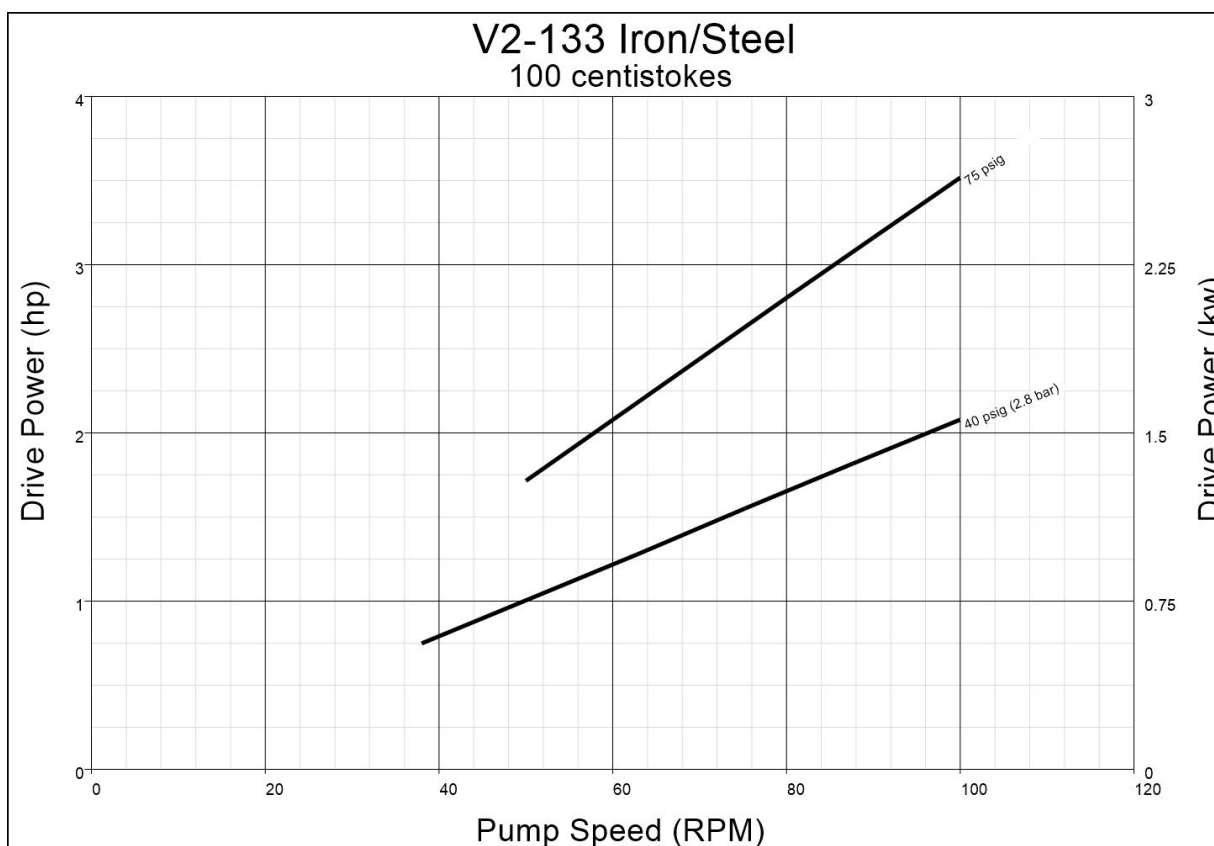
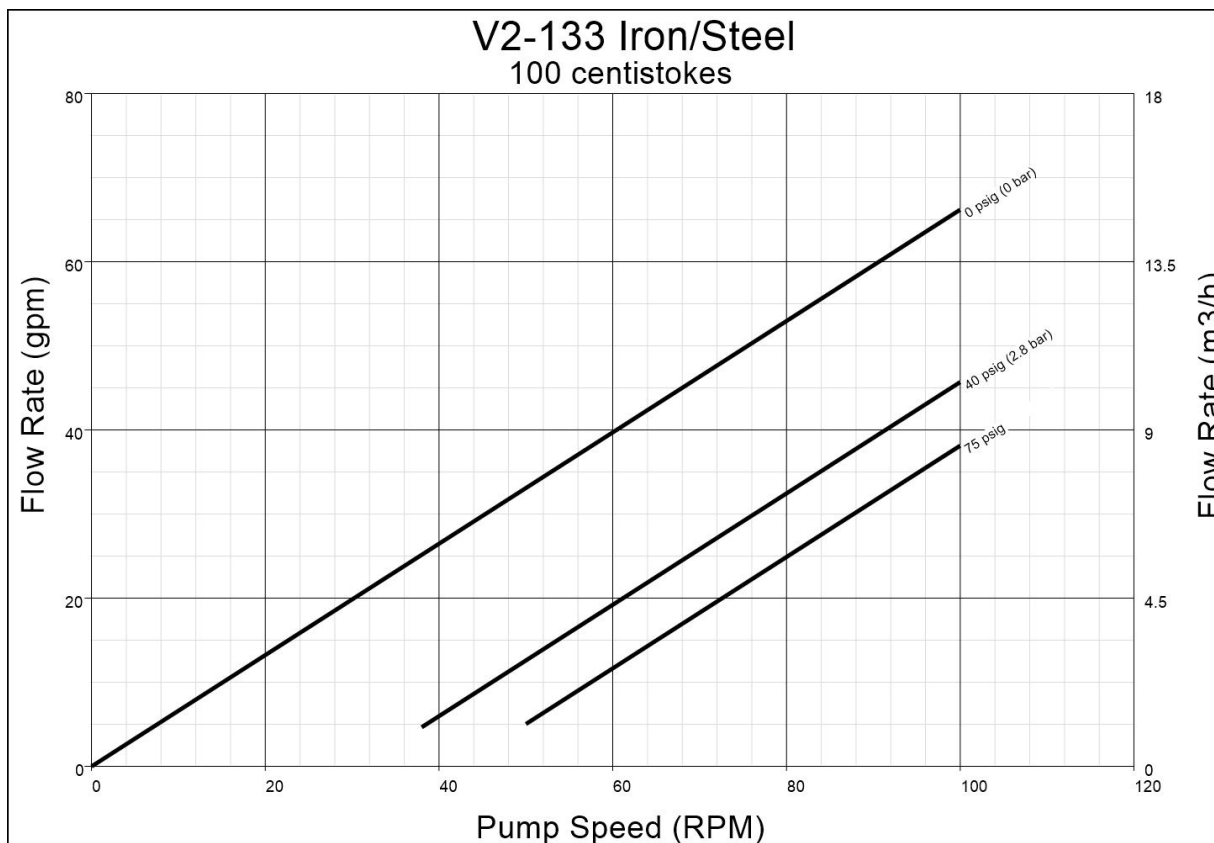


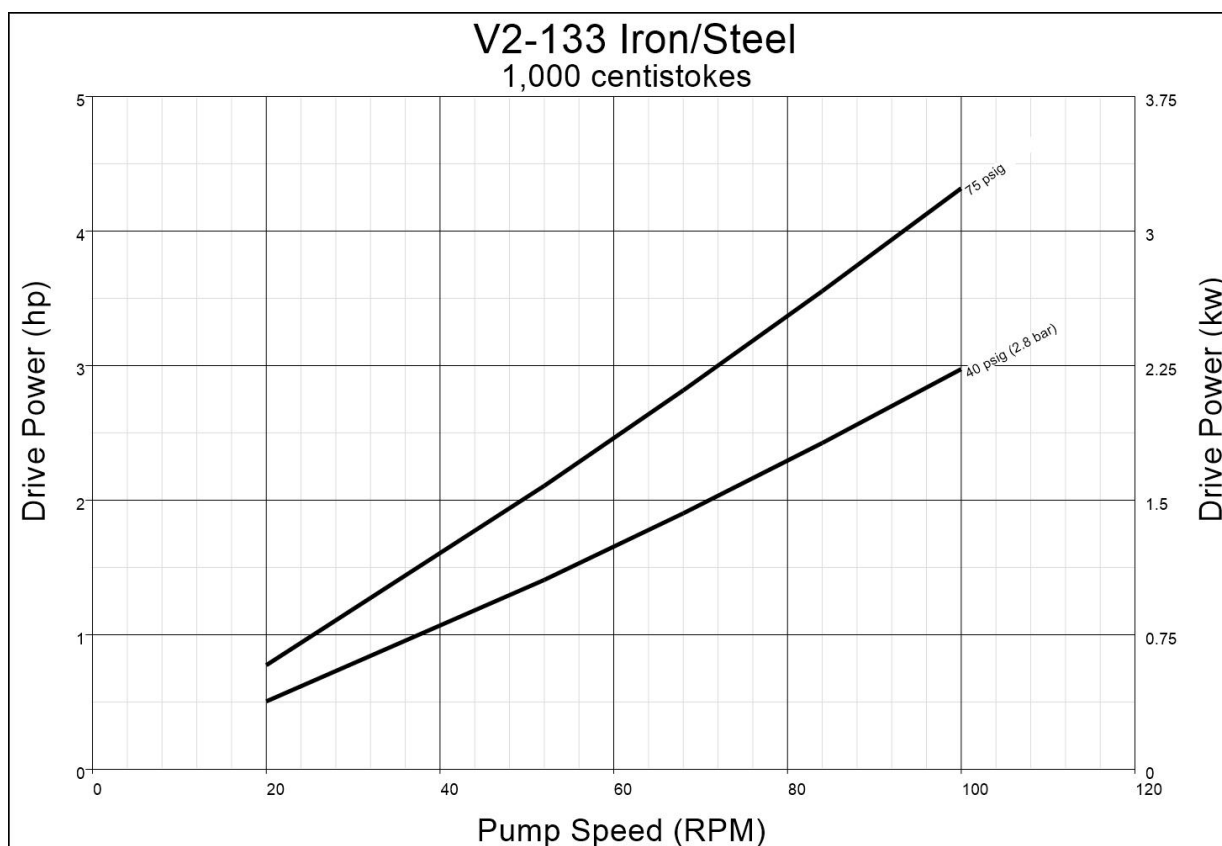
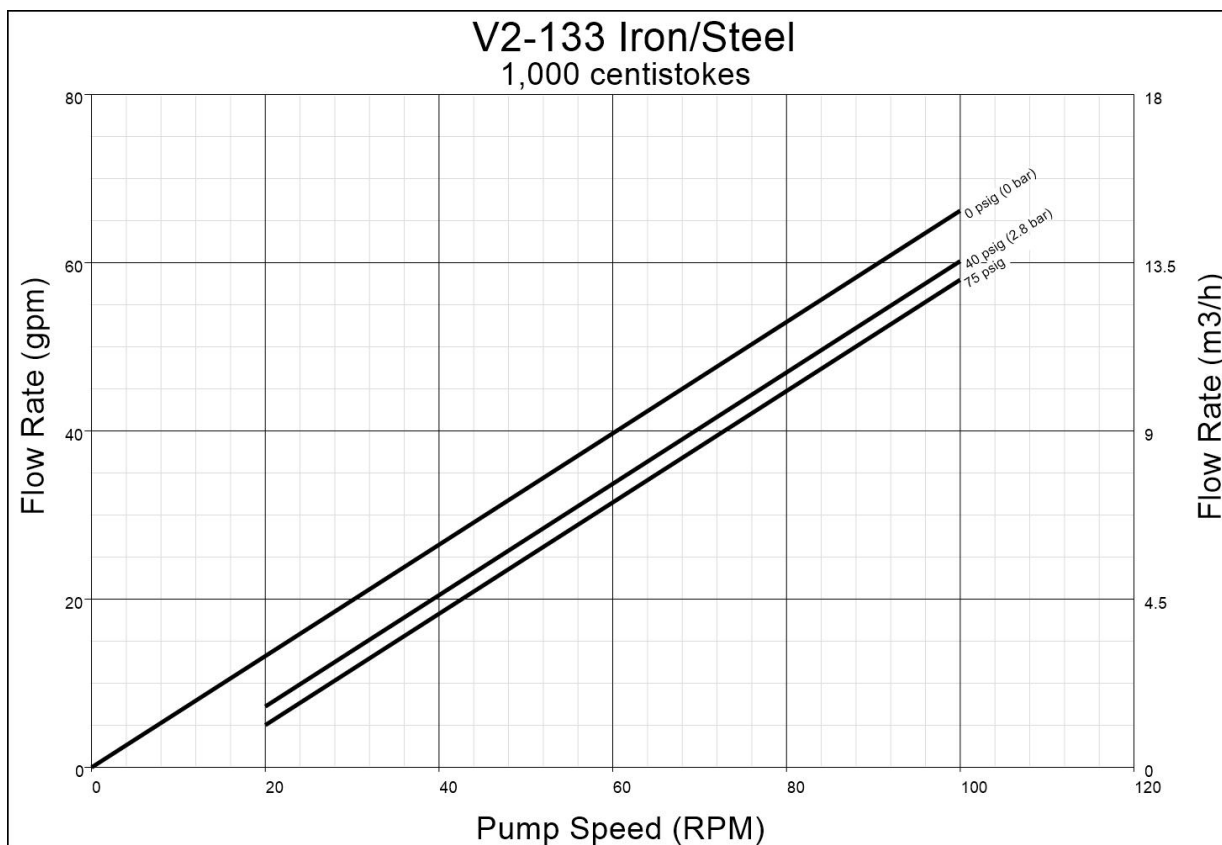


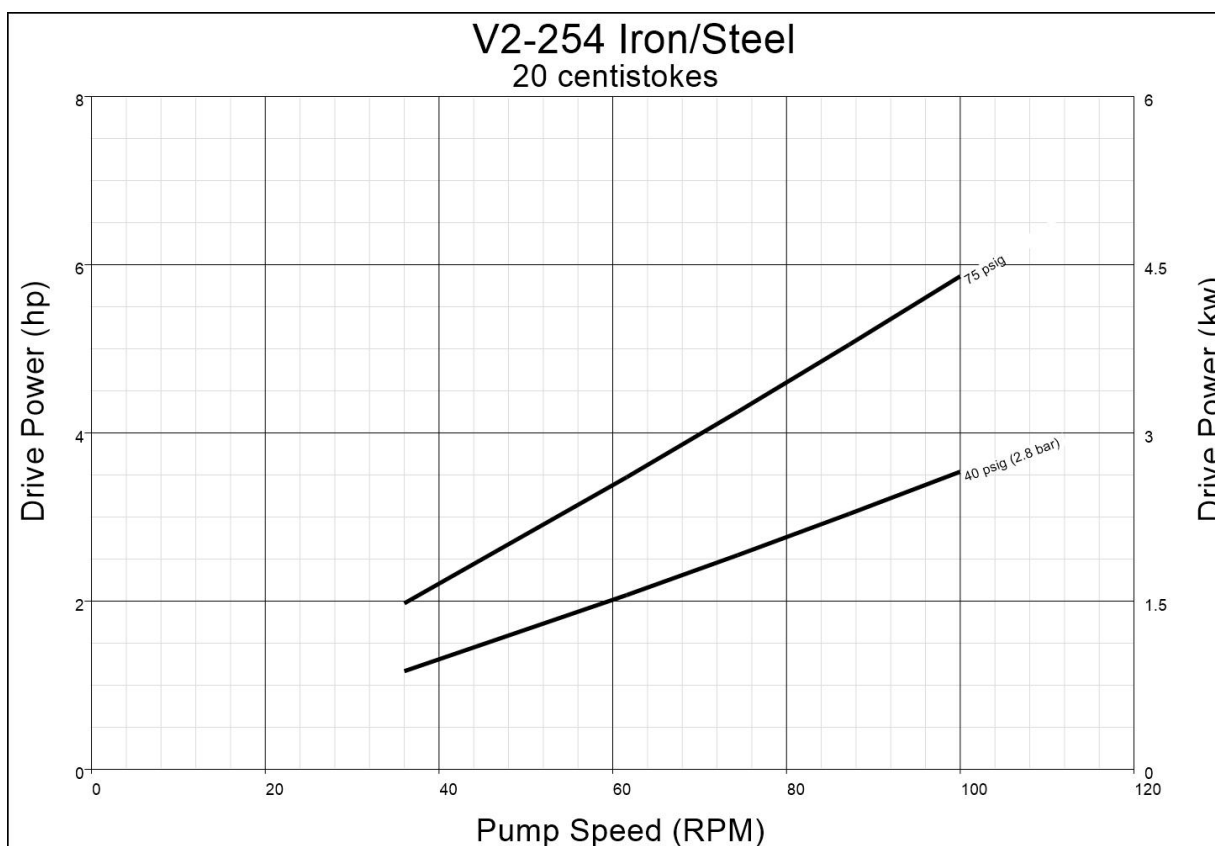
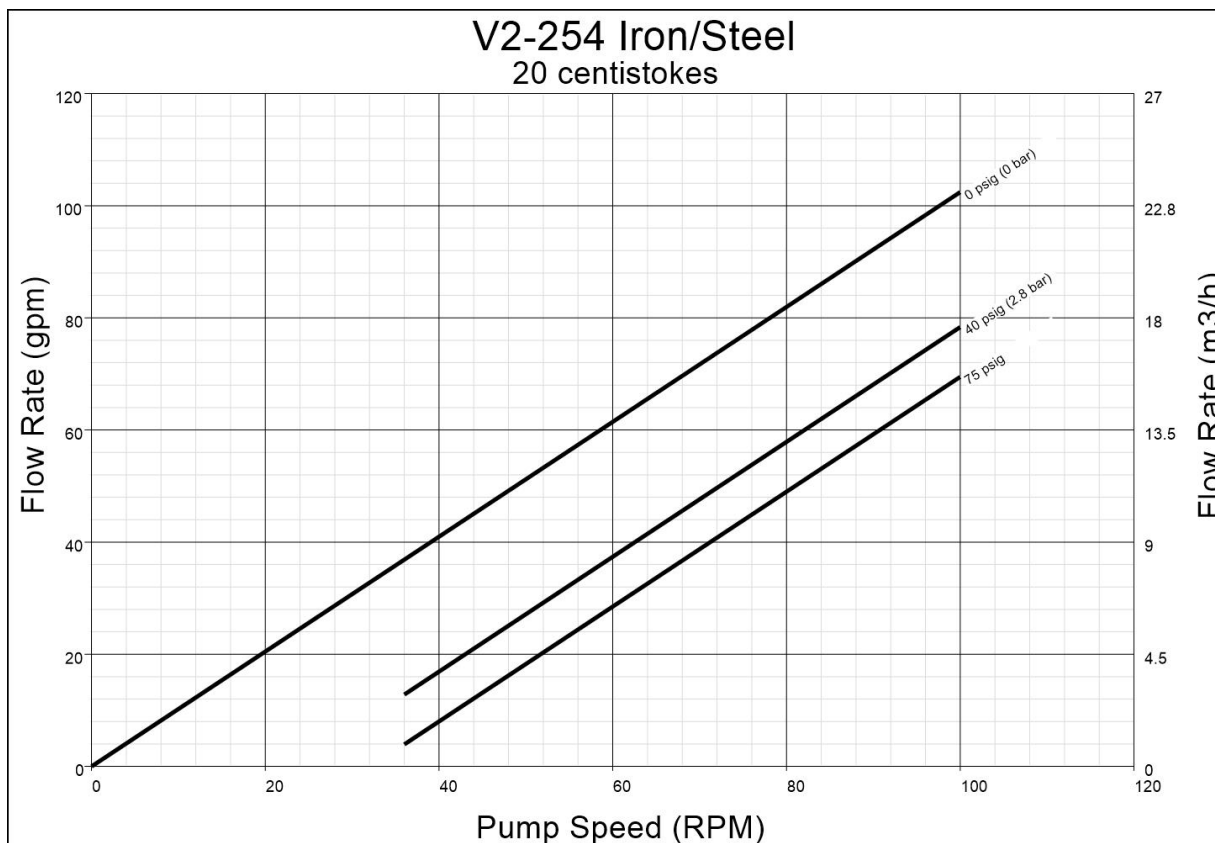


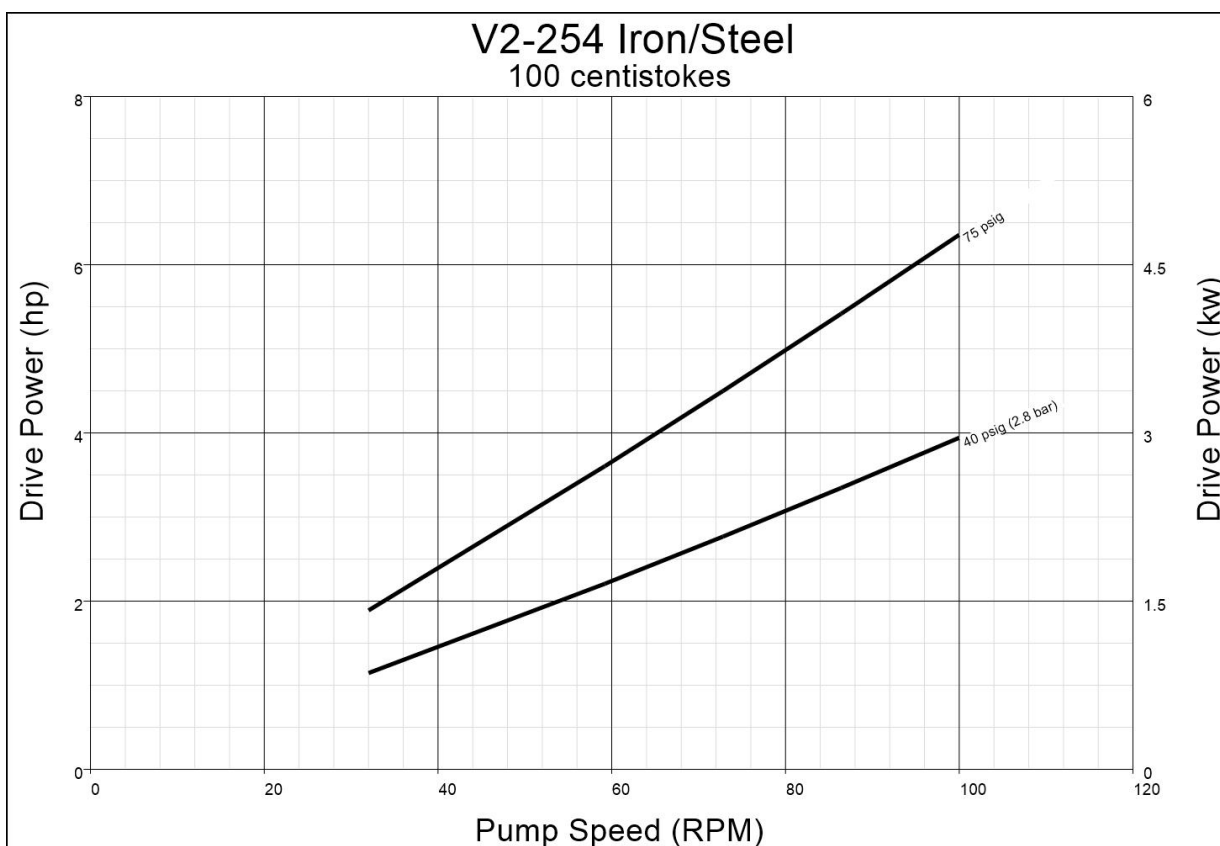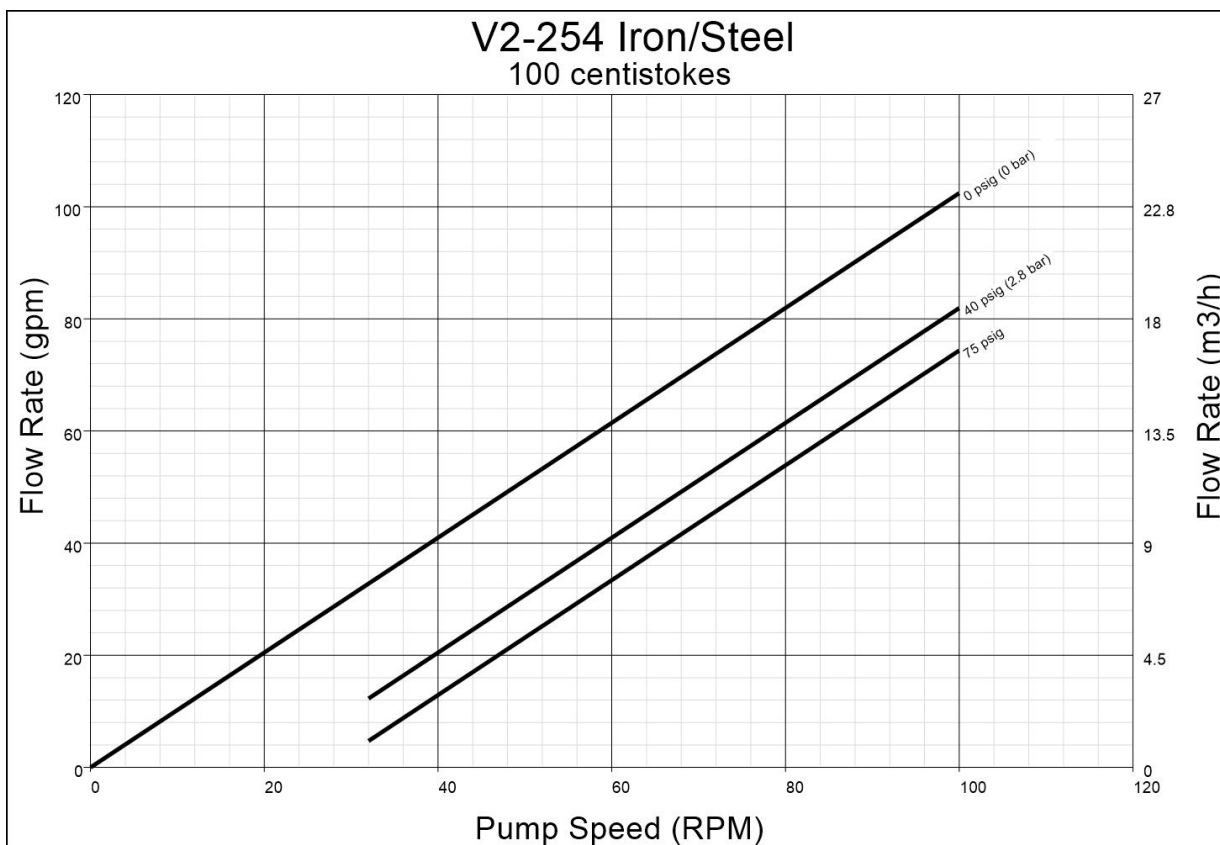

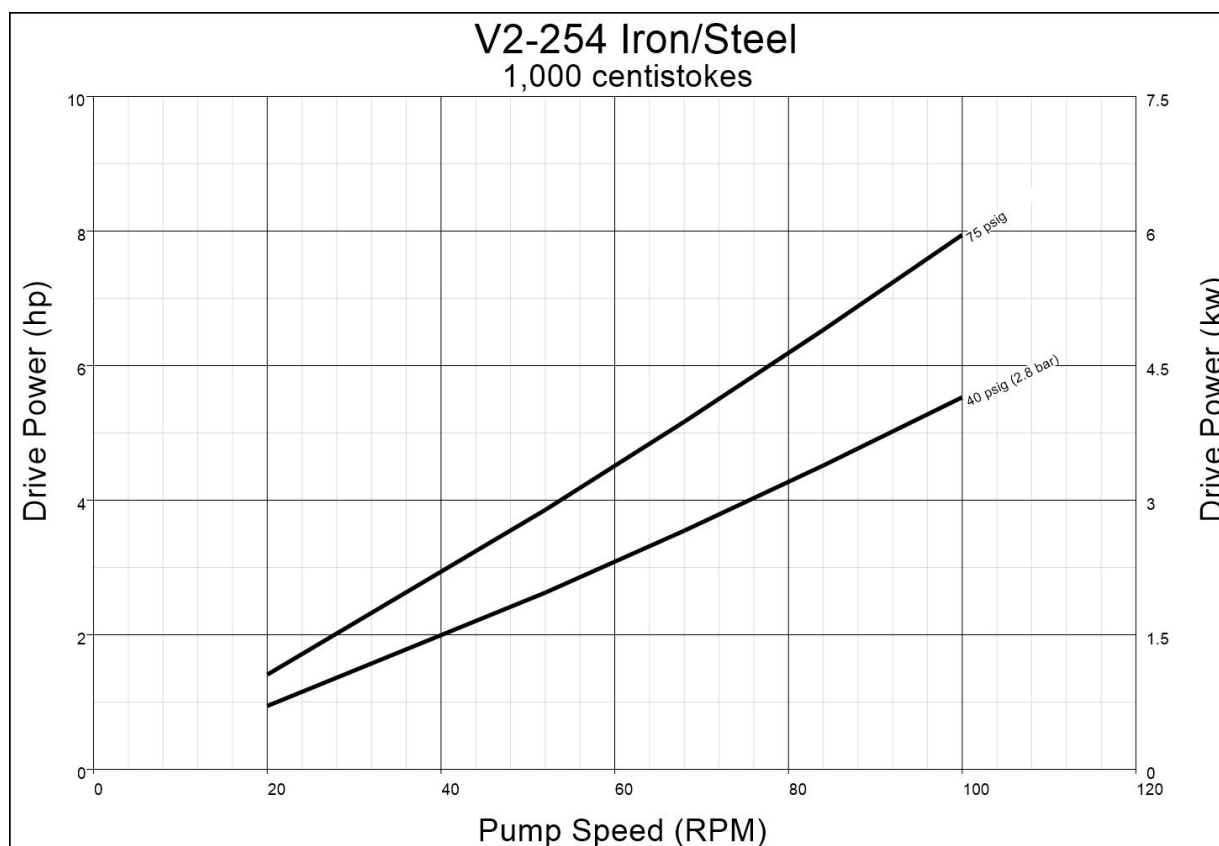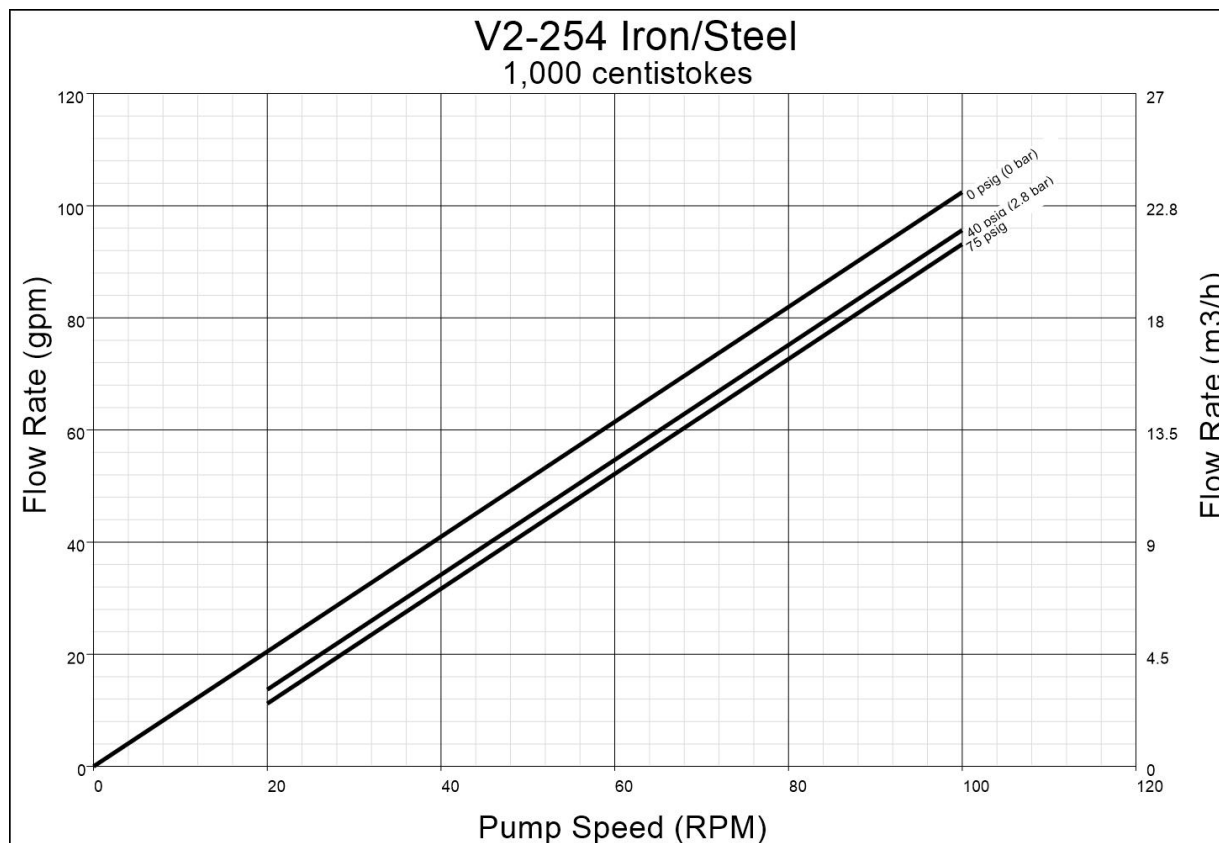

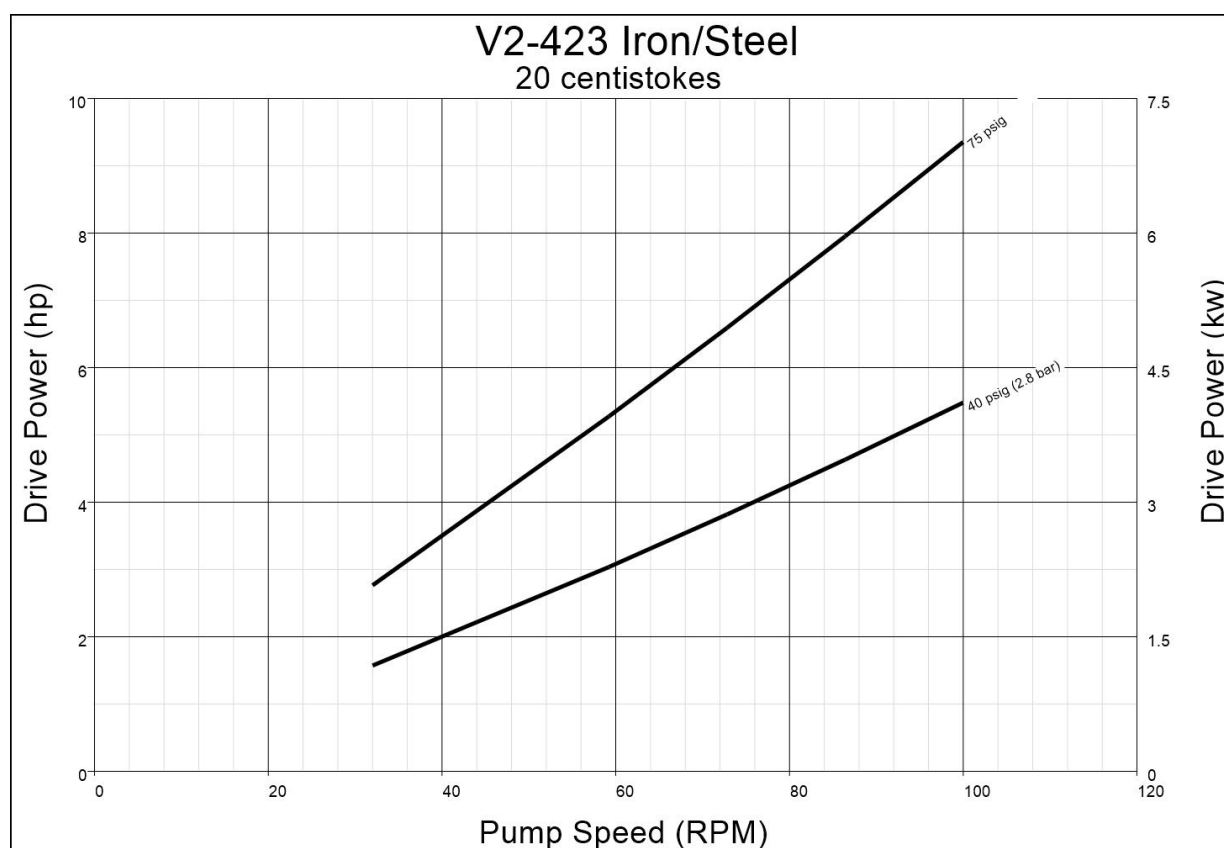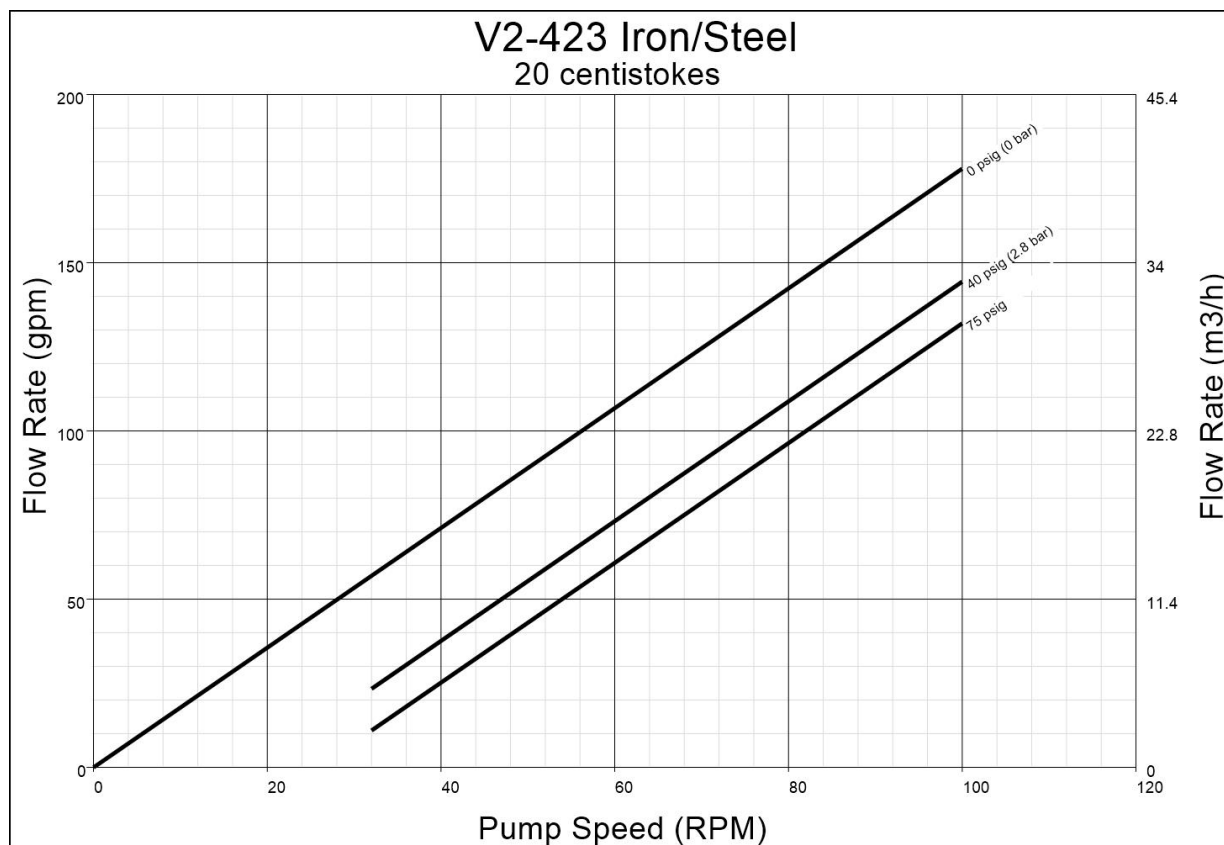

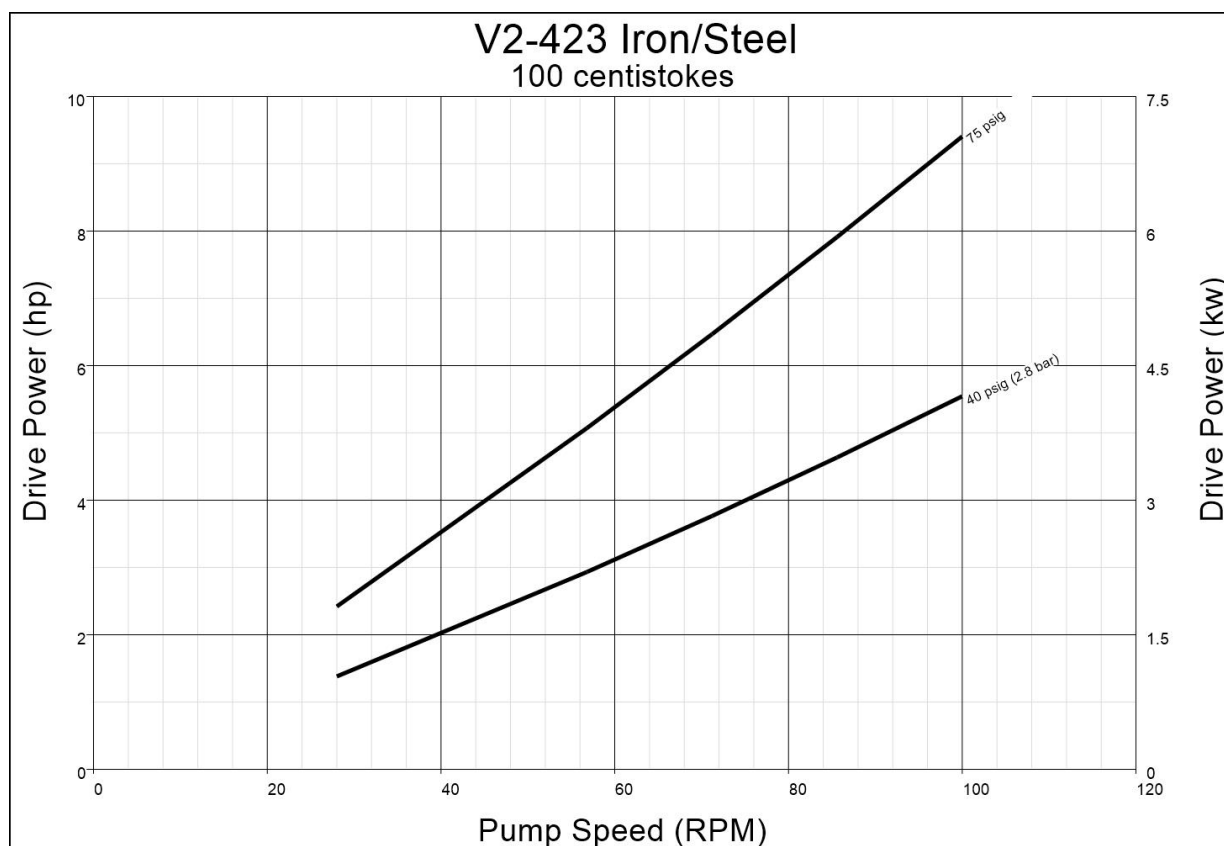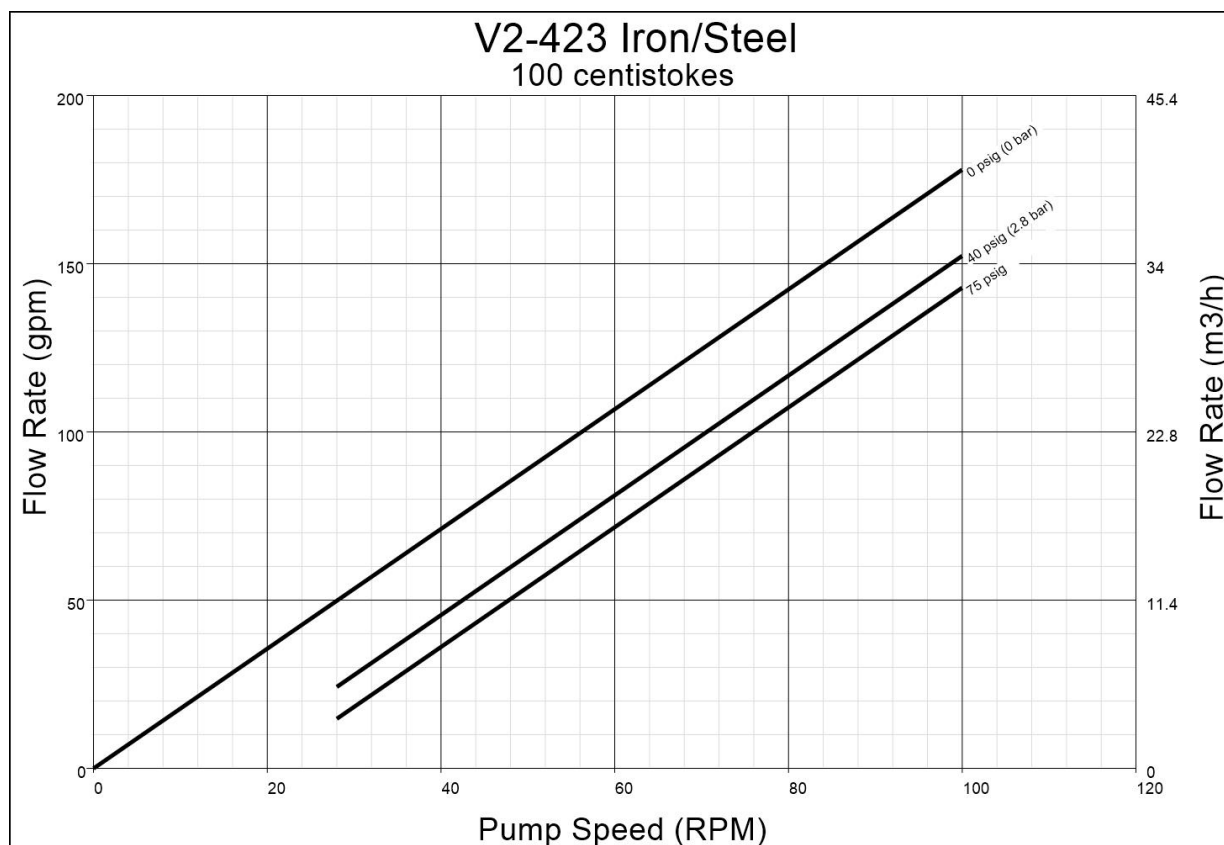

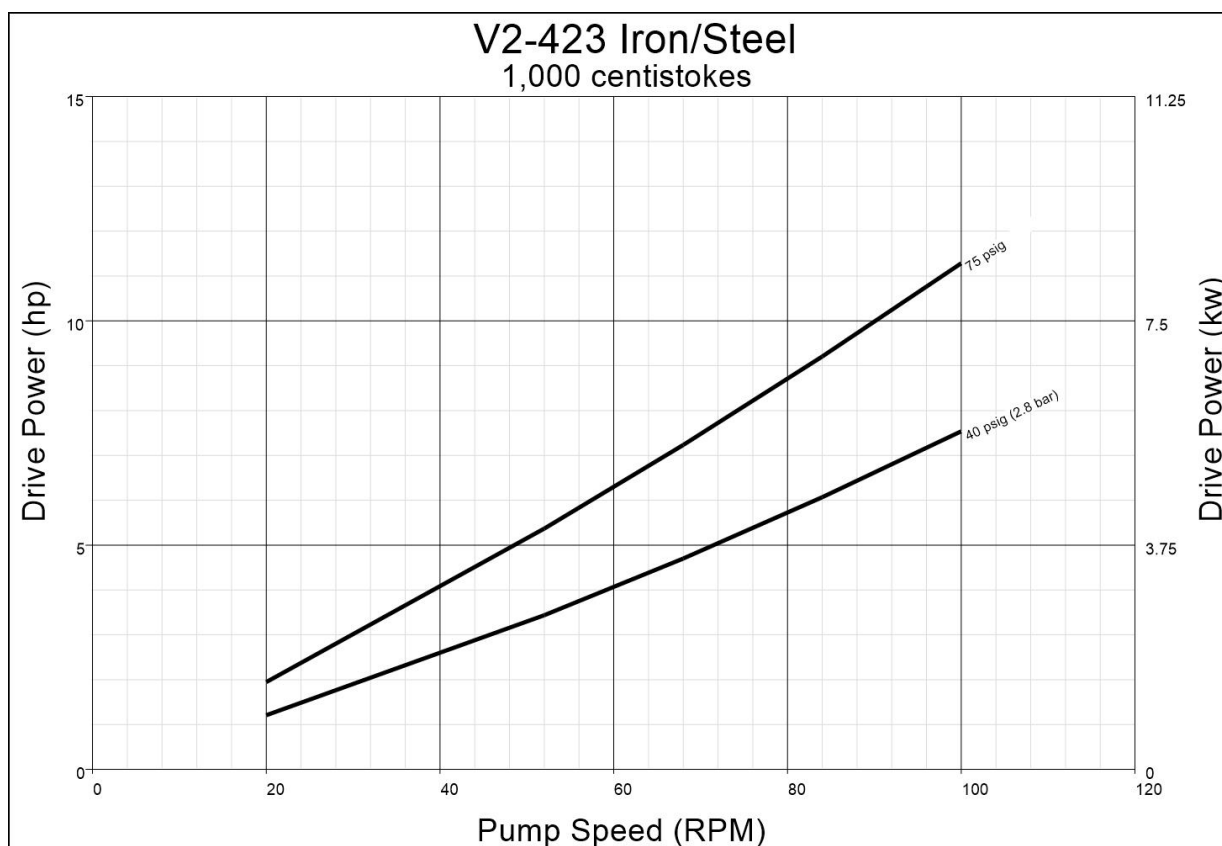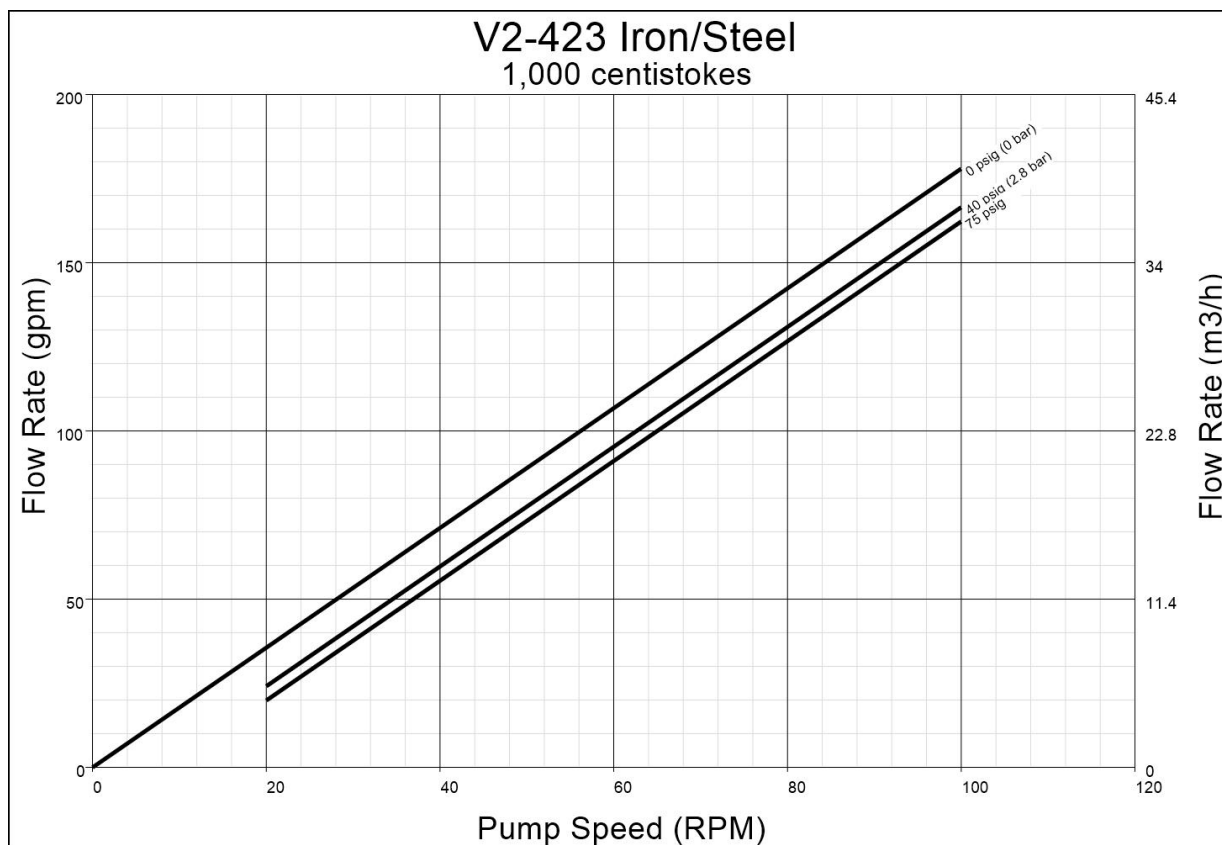

PSG Grand Rapids
1809 Century Avenue SW
Grand Rapids, MI 49503 USA
P: +1(616)241-1611 - F: +1(616)241-3752
blackmer.com



Where Innovation Flows

PSG® reserves the right to modify the information and illustrations contained in this document without prior notice. This is a non-contractual document. 01-2024

1903-021