



Screw Compressor Package – DDNC Direct-Drive, Non-Cooled Systems

Mouvex® has developed non-cooled modular screw compressor systems fitted with common accessories for PTO direct-drive systems that can be mounted inside the truck frame.

Features:

- Systems designed to fit trucks with a wheelbase length from 3.50 m
- Versatile systems for clockwise or counter-clockwise drive

Systems designed for Mouvex screw compressors:

- B600
- MISTRAL
- TYPHON II


B600

325 - 600 m³/h



MISTRAL

420 - 750 m³/h

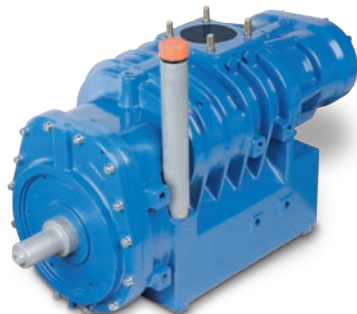

TYPHON II

600 - 1130 m³/h

DDNC




Direct-Driven, Non-Cooled Systems

B600-20R DDNC



TYPHON II-13R/15L DDNC

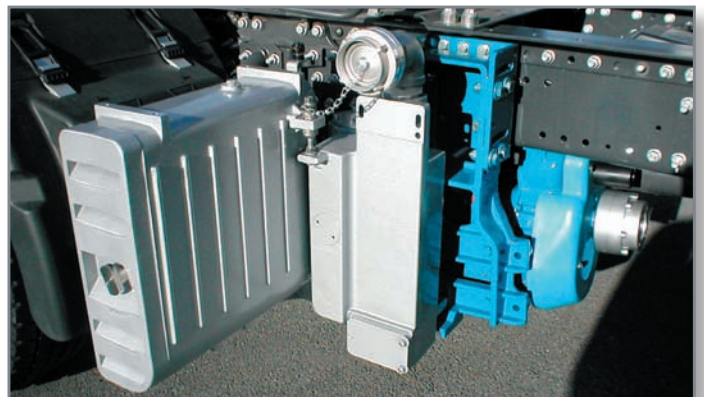


Length: 456 mm, Height: 690 mm, Width: 770 mm



Screw Compressor Package – DDNC

Direct-Drive, Non-Cooled Systems

Compressor Model		B600		MISTRAL		TYPHON II	
Version		20R 30R	13R/15L 19R/22L	20R 30R	13R/15L 19R/22L	20R 30R	13R/15L 19R/22L
Flow	m ³ /h	325 - 600		420 - 750		600 - 1130	
Weight	kg	212	242	233	263	260	290
Height (H) - Maximum	mm	730		730		730	
Length (L/I)	mm	456 / 174		456 / 174		456 / 174	
Width (W)	mm	Min. 788 – Max. 809		Min. 788 – Max. 809		Min. 788 – Max. 809	
Compressor Length (C)	mm	549	686	587	723	664	799





20R/CW 1250 - 2000 rpm
30R/CW 1800 - 3000 rpm



13R/CW 780 - 1300 rpm
19R/CW 1170 - 1950 rpm

15L/CCW 300 - 1500 rpm
22L/CCW 1380 - 2250 rpm

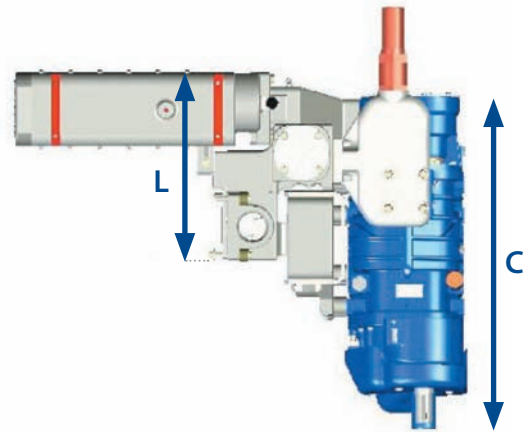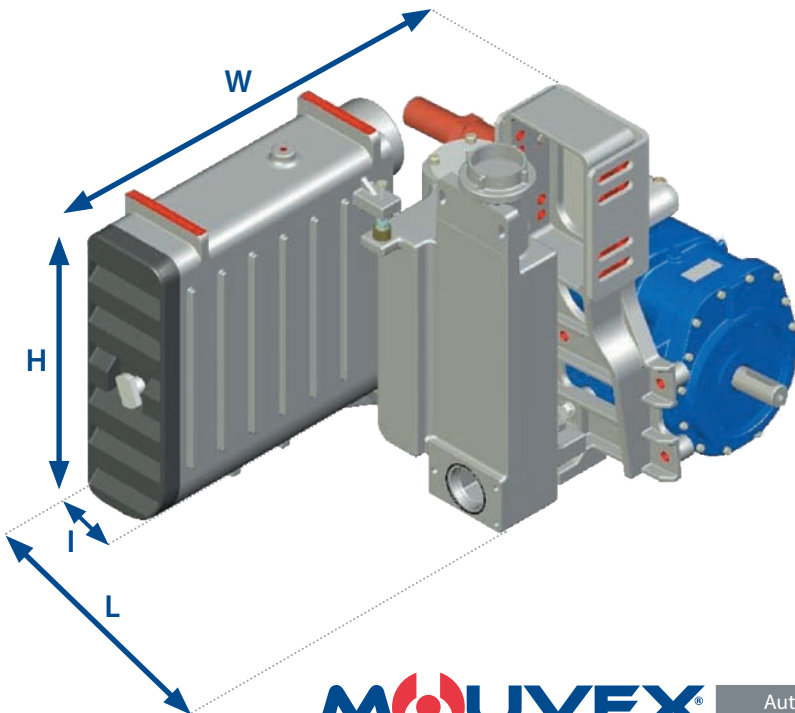

ZI la Plaine des Isles • 2 rue des Caillottes
F-89000 AUXERRE - FRANCE
Tel: + 33.3.86.49.86.30 • Fax: + 33.3.86.46.42.10
contact@mouvex.com
mouvex.com

Authorized PSG® Partner:

