



TYPHON II Screw Compressor






The Multitalented Solution for Mounting Inside Truck Frame

TYPHON II-20R:1200 – 2000 rpm CW **TYPHON II-30R:**1800 – 3000 rpm CW **Dimensions:**

L 664 x H 362 x W 280 mm

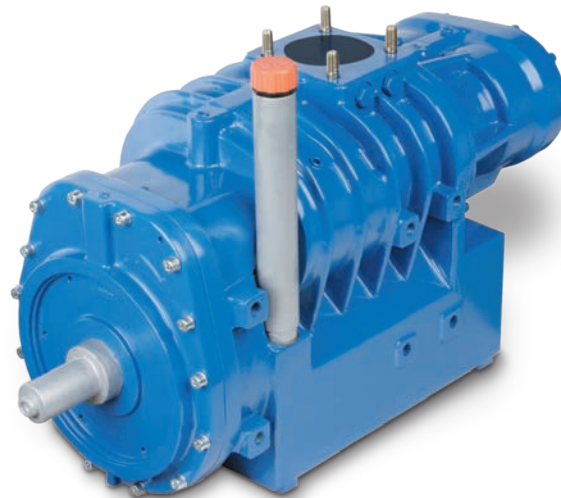Weight:


143 kg

**TYPHON II-13R/15L:**780 – 1300 rpm CW 
or 900 – 1500 rpm CCW **TYPHON II-19R/22L:**1170 – 1950 rpm CW 
or 1320 – 2250 rpm CCW **Dimensions:**

L 799 x H 416 x W 295 mm

Weight:

173 kg

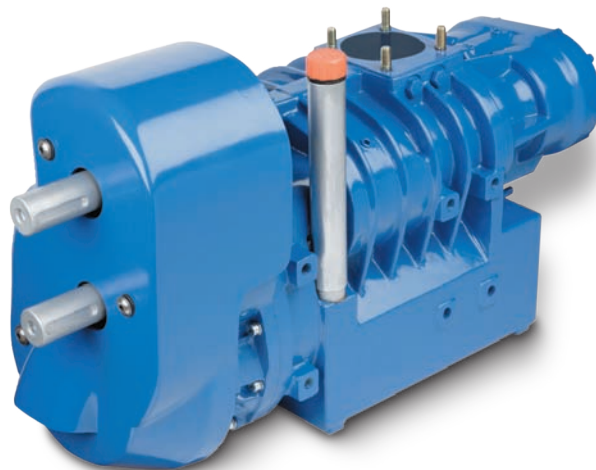

N/Pressure or SP/Suction and Pressure
Flow rates 600 to 1130 m³/h




TYPHON II Screw Compressor

The Multitalented Solution for Mounting Inside Truck Frame

Compressor Speed (rpm)

Model	1	2	3	4	5
13R	780	910	1040	1170	1300
15L	900	1050	1200	1350	1500
19R	1170	1365	1560	1755	1950
20R	1200	1400	1600	1800	2000
22L	1320	1580	1800	2035	2250
30R	1800	2100	2400	2700	3000


Flow (m³/hr) / Power (kW)

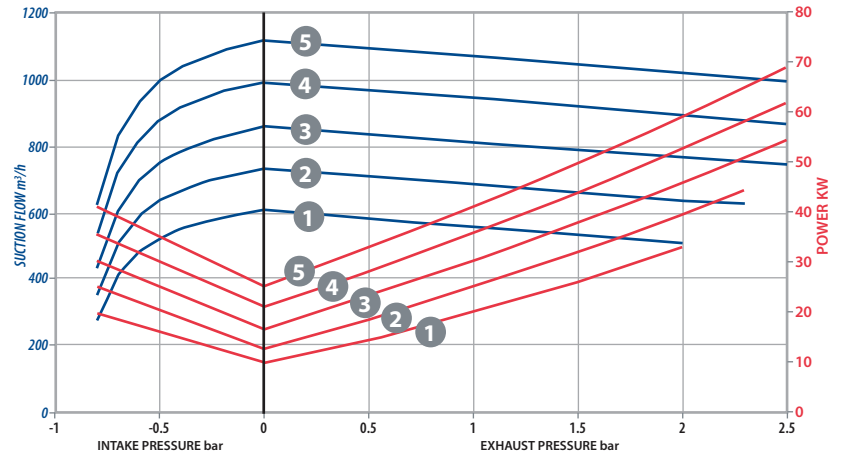

Torque / Pressure (Nm)

Model	Pressure (bar) At Full Speed		
	1.5	2.0	2.5
13R	370	430	510
15L	320	380	440
19R	250	300	350
20R	240	280	330
22L	220	260	300
30R	160	190	220


TYPHON II Screw Compressor 20R and 30R

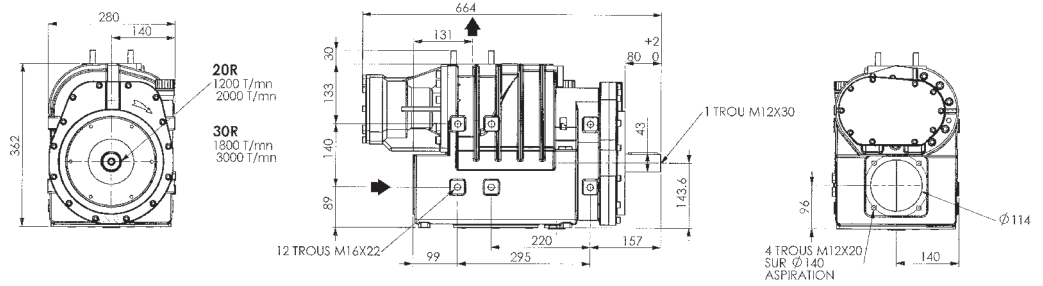

Torque / Suction (Nm)

Model	Suction -800 (mbar)
13R	308
15L	267
19R	211
20R	200
22L	182
30R	133

TYPHON II Screw Compressor with Multiplier 13R/15L and 19R/22L

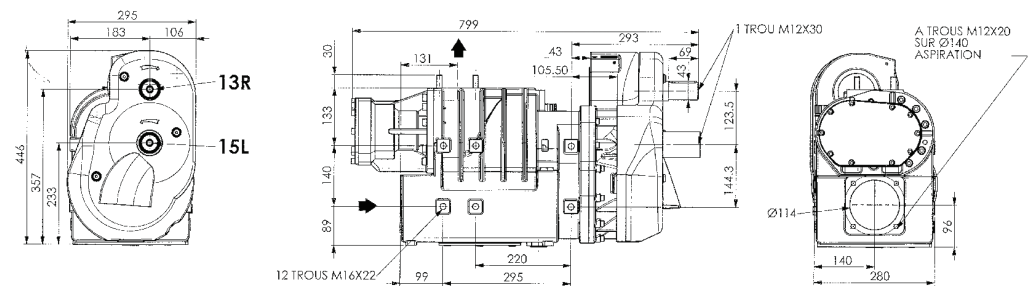

ZI la Plaine des Isles • 2 rue des Caillottes
F-89000 AUXERRE - FRANCE
Tel: + 33.3.86.49.86.30 • Fax: + 33.3.86.46.42.10
contact@mouvex.com
mouvex.com

Authorized PSG® Partner: