



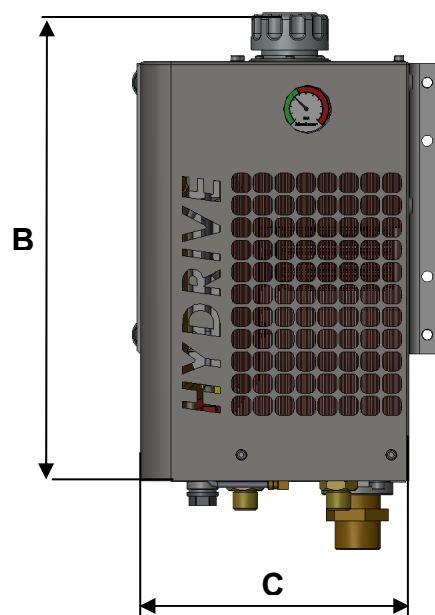

### CHARATERISTICS

|                                  |   | STANDARD                     | AVAILABLE OPTIONS |
|----------------------------------|---|------------------------------|-------------------|
| Oil flow (l/min)                 |   | 55 à 100                     |                   |
| Maximum pressure bar (PSI)       |   | 170 (2466)                   | 280 (4061)        |
| Power dissipation (KW)           |   | 10 for 40°C temperature rise |                   |
| Oil tank capacity (litre)        |   | 10                           |                   |
| Fan speed (rpm)                  |   | 2800                         |                   |
| Fan hydraulic motor flow (l/min) |   | 5.5                          |                   |
| Dimensions mm (in.)              | A | 526 (20.71)                  |                   |
|                                  | B | 498 (19.6)                   |                   |
|                                  | C | 278 (10.94)                  |                   |
| Weight dry kg (lbs)              |   | 24 (53)                      |                   |

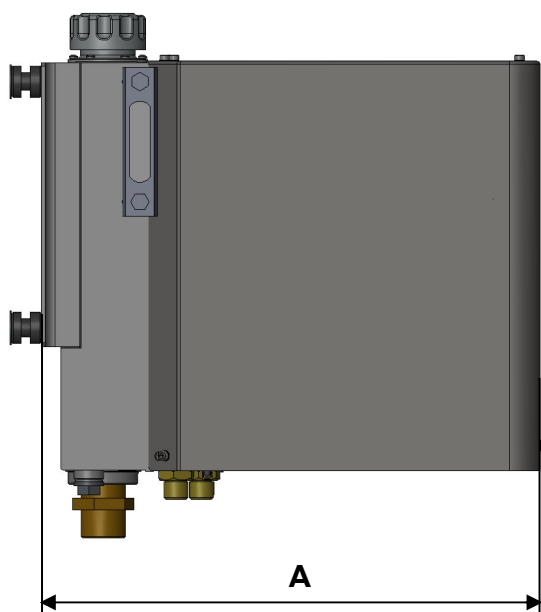

## OPERATING LIMITS

|                             | STANDARD MATERIALS |
|-----------------------------|--------------------|
| Minimum temperature °C (°F) | -40 (40)           |
| Maximum temperature °C (°F) | 50 (122)           |

## MATIERES

| Part No | PART NAME       | STANDARD MATERIALS | AVAILABLE OPTIONS |
|---------|-----------------|--------------------|-------------------|
| 2       | Casing          | Stainless steel    |                   |
| 16      | Hydraulic bloc  | Anodized aluminium |                   |
| 30      | Fan             | Coated steel       |                   |
| 35      | Hydraulic motor | Aluminium          |                   |
| 43      | Radiator        | Aluminium painted  |                   |
| 45 - 46 | Hoses           | Rubber             |                   |
| 114     | Vibration pads  | Rubber             |                   |

