

# Glycol Feed Systems



Where Innovation Flows



Neptune™ Glycol Feeders are designed for the addition of glycol solution to closed-loop chilled or hot water systems to maintain pressure in the loop by making up for losses that occur due to leakage.

Glycol addition is controlled by a pressure switch with adjustable low and high set points\*. When the pressure in the loop reaches the low set point, the pump begins to feed glycol into the system until the high-pressure set point is achieved and the switch stops the pump.

\*The standard pressure switch features the following ranges:  
Minimum Cut-in (low) 10 PSI (0.7 bar); Maximum Cut-out (high) 100 PSI (6.9 bar);  
Differential Range 15-50 PSI (1.0-3.4 bar).

Factory set to Cut-in at 20 PSI and Cut-off at 40 PSI.


## FEATURES AND BENEFITS

- 55 gallon (208 liters) polyethylene tank mounted in a steel frame
- Bronze rotary gear pump
- Float switch for low level pump shutoff and alarm
- NEMA 4X control panel includes:
  - Hand off auto selector switch for pump motor
  - Pump (on) indicator light
  - (Low) tank level indicator light
  - Dry contact for remote low-level indication
  - Power cord with plug, 115V AC (60Hz) or 230V AC (50Hz)
- Max pressure up to 100 psi (6.9 bar)
- Max capacity up to 7.2 gpm (27.3 L/min)


## OPTIONS

- Optional audible alarm (not watertight) and push-button silence available

## GFS-50-A & GFS-50-1A

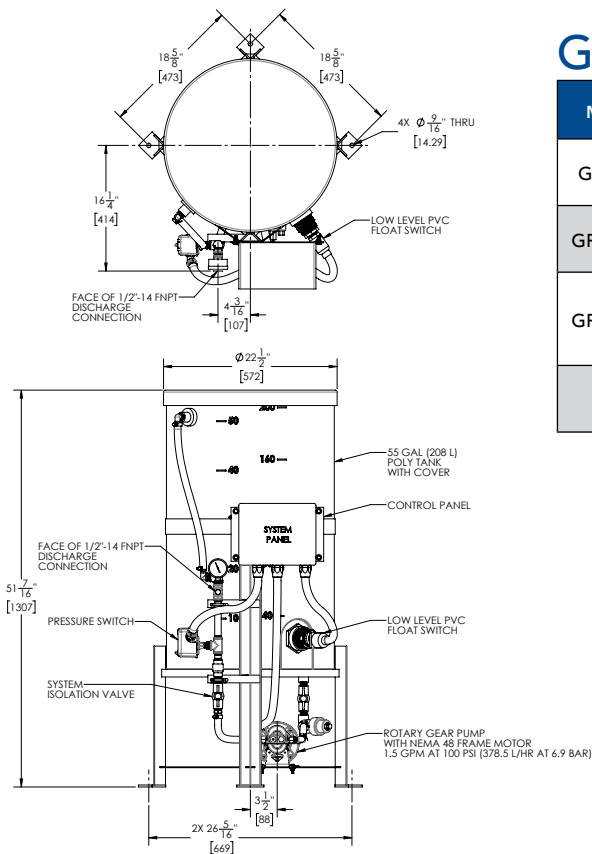

## MODEL GFS-50-2A

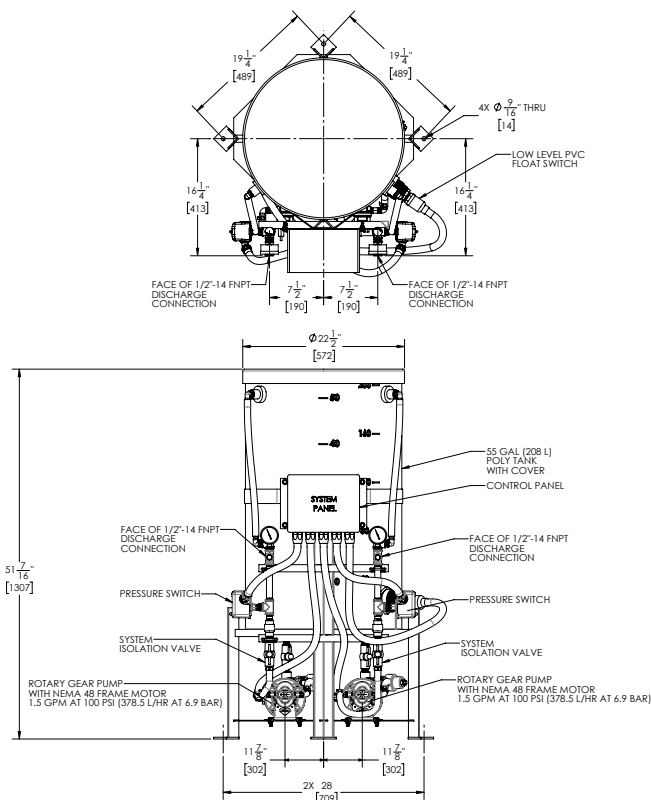

# Glycol Feed Systems

## SELECTION CHART

MODEL	DESCRIPTION
GFS-50-1	Complete system including 1.6 gpm at 100 psi (6.1 L/min at 6.9 bar) pump and low-level light.
GFS-50-1A	Complete system including 1.6 gpm at 100 psi (6.1 L/min at 6.9 bar) pump, low level light and audible alarm.
GFS-50-2A	Complete system including two 1.6 gpm at 100 psi (6.1 L/min at 6.9 bar) pumps, low level light and audible alarm. Separate discharge and pressure switches allow feeding two separate closed-loop systems independently from a single tank.
LP	Option to furnish larger pump rated 3.6 gpm at 100 psi (13.6 L/min at 6.9 bar). Add "LP" to Model Number to specify larger pump; Example GFS-50-1-LP.


## MATERIALS OF CONSTRUCTION

### EACH DISCHARGE ASSEMBLY CONTAINS:

- 1/2" S40/ Brass/ Pipe w/ NPT Fittings
- 1/2" Ball Valve/ PVC
- 1/2" Check Valve/ Brass
- 1/2" Relief Valve/ Brass set at 100 psi (6.9 bar) w/PVC Return Line
- Pressure Gauge 0-100 psi (0-6.9 bar)
- Pressure Switch

### EACH SUCTION ASSEMBLY CONTAINS:

- 1/2" S80/ PVC Pipe w/ NPT Fittings & PVC Tubing
- 1/2" PVC Ball Valve
- 1/2" Cast Iron Y-Strainer

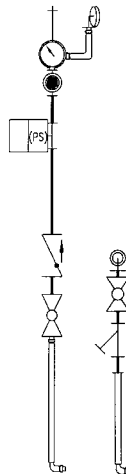

Model GFS-50-1

Where Innovation Flows



PSG

22069 Van Buren Street  
Grand Terrace, CA 92313-5651 USA

P: +1 (909) 422-1700 • F: +1 (909) 783-3440

[psgdover.com/neptune](http://psgdover.com/neptune)

Distributed By:

GLY-19

© 2025 PSG, a Dover company

NPT-10210-F-04

Neptune reserves the right to modify the information and illustrations contained in this document without prior notice. This is a not-contractual document.