
38 mm (1-1/2") Pump
Maximum Flow Rate:
330 lpm (87.2 gpm)




P4 METAL

CLICK TO VIEW ADDITIONAL MODELS

DIMENSIONAL DRAWINGS

P4 Metal

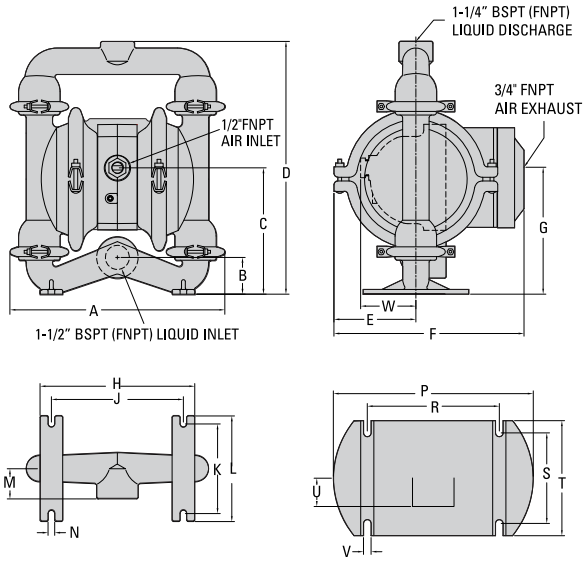

FOOTED BASE FOR STAINLESS STEEL & ALLOY C MODELS

BASE FOR ALUMINUM & CAST IRON MODELS

DIMENSIONS

ITEM	METRIC (mm)	STANDARD (inch)
A	368	14.5
B	64	2.5
C	206	8.1
D	429	16.9
E	138	5.4
F	320	12.6
G	211	8.3
H	262	10.3
J	224	8.8
K	150	5.9
L	178	7.0
M	51	2.0
N	10	0.4
P	338	13.3
R	224	8.8
S	155	6.1
T	193	7.6
U	48	1.9
V	13	0.5
W	91	3.6


LW0338 REV. A

PUMP DATA

Specifications:

Ship Weight..... Aluminum 13 kg (29 lb)
316 Stainless Steel 20 kg (45 lb)
Cast Iron 22 kg (49 lb)
Alloy C 23 kg (51 lb)
Air Inlet ..... 19 mm (3/4")
Liquid Inlet.....38 mm (1-1/2")
Liquid Outlet.....32 mm (1-1/4")

P4 Metal - FDA Series

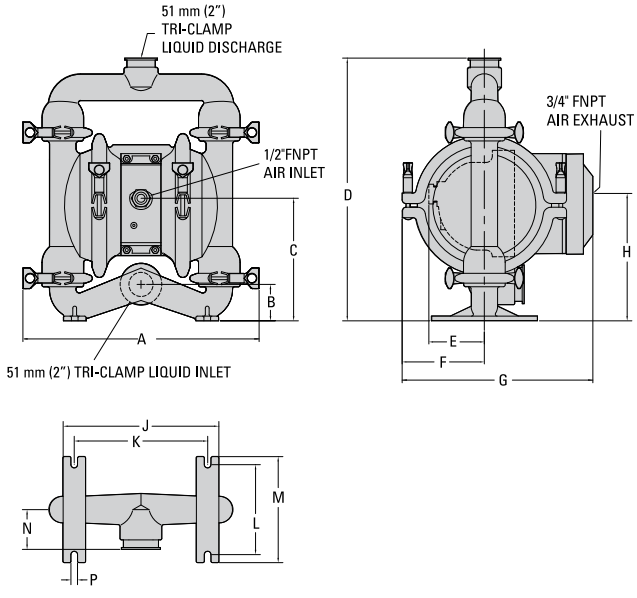

DIMENSIONS

ITEM	METRIC (mm)	STANDARD (inch)
A	396	15.6
B	64	2.5
C	206	8.1
D	422	17.4
E	91	3.6
F	138	5.4
G	320	12.6
H	211	8.3
J	262	10.3
K	224	8.8
L	152	6.0
M	178	7.0
N	69	2.7
P	10	0.4

LW0339 REV. A

WILDEN®

22069 Van Buren Street
Grand Terrace, CA 92313-5607 USA


O: +1 (909) 422-1730 F: +1 (909) 783-3440
www.wildenpump.com

PSG® a DOVER company
psgdover.com

PERFORMANCE

P4 METAL RUBBER-FITTED


Max. Flow Rate..... 288 lpm (76 gpm)
Max. Inlet Pressure ..... 8.6 bar (125 psig)
Max. Size Solids.....4.8 mm (3/16")
Max. Suction Lift ..... 5.8 m Dry (19.0')
8.0 m Wet (26.0')

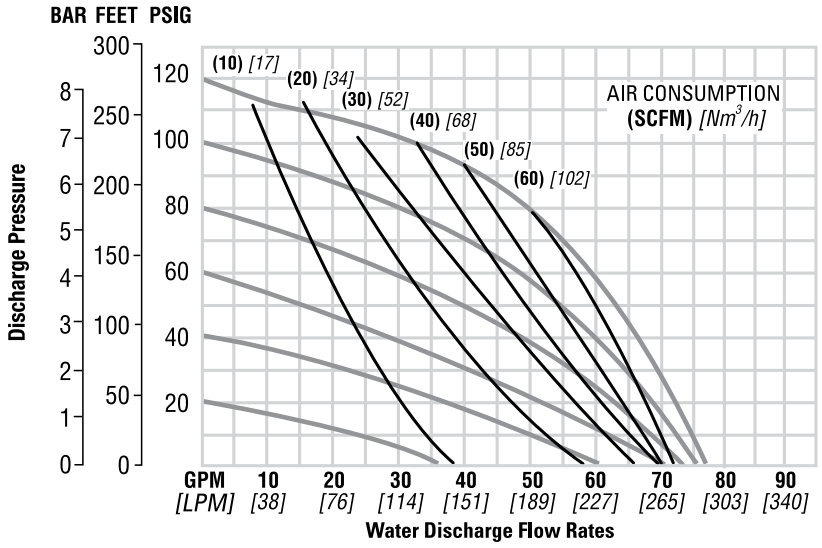

Click button to view Performance Curve → RUBBER-FITTED | TPE-FITTED

P4 METAL REDUCED-STROKE PTFE-FITTED

Max. Flow Rate..... 295 lpm (78 gpm)
Max. Inlet Pressure ..... 8.6 bar (125 psig)
Max. Size Solids.....4.8 mm (3/16")
Max. Suction Lift ..... 3.7 m Dry (12.0')
8.5 m Wet (28.0')

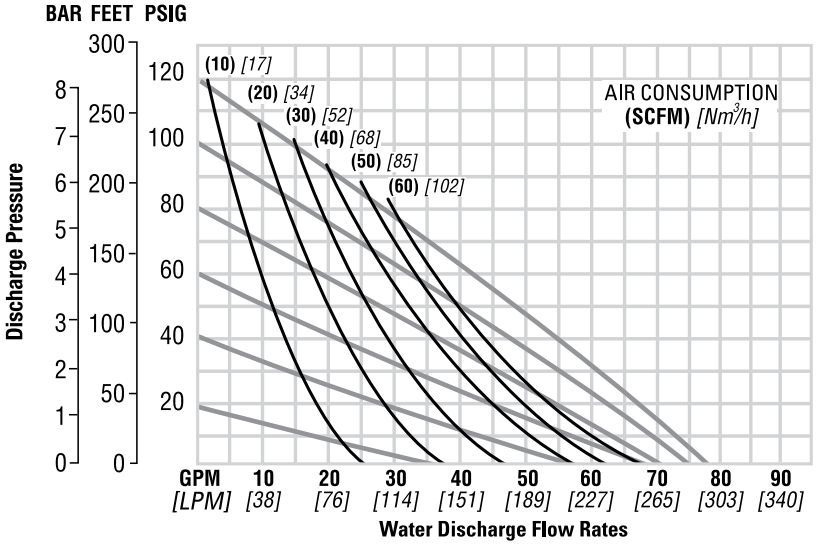

Click button to view Performance Curve → REDUCED-STROKE PTFE-FITTED | FULL-STROKE PTFE-FITTED | ULTRA-FLEX™-FITTED

WILDEN®
22069 Van Buren Street
Grand Terrace, CA 92313-5607 USA
O: +1 (909) 422-1730 F: +1 (909) 783-3440
www.wildenpump.com

PSG® a DOVER company
psgdover.com