51 mm (2") Pump Maximum Flow Rate: 630 lpm (166 gpm)



P8 METAL

CLICK TO VIEW ADDITIONAL MODELS


PUMP DATA

Specifications:

Ship Weight..... Aluminum 32 kg (70 lb)
316 Stainless Steel 51 kg (112 lb)
Cast Iron 47 kg (104 lb)
Alloy C 52 kg (114 lb)
Air Inlet ..... 13 mm (1/2")
Liquid Inlet..... 51 mm (2")
Liquid Outlet..... 51 mm (2")

DIMENSIONAL DRAWINGS

P8 Metal

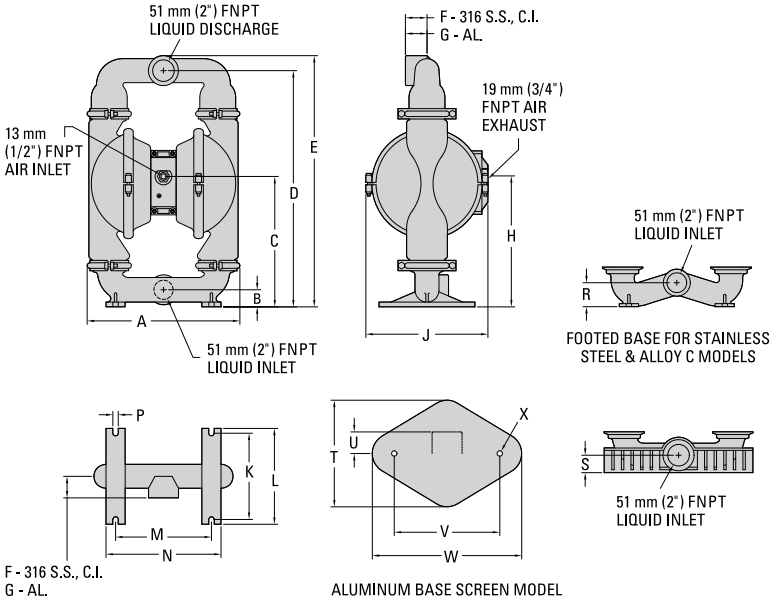


DIMENSIONS

ITEM	METRIC (mm)	STANDARD (inch)
A	404	15.9
B	48	1.9
C	356	14.0
D	630	24.8
E	668	26.3
F	58	2.3
G	61	2.4
H	348	13.7
J	343	13.5
K	231	9.1
L	257	10.1
M	257	10.1
N	312	12.3
P	15	0.6
R	64	2.5
S	51	2.0
T	282	11.1
U	58	2.3
V	279	11.0
W	396	15.6
X	15 DIA.	0.6 DIA.

LW0395 REV. A

P8 Metal - FDA Series

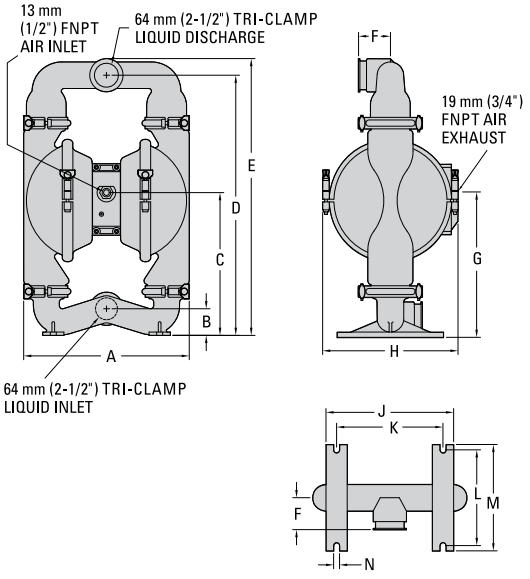

DIMENSIONS

ITEM	METRIC (mm)	STANDARD (inch)
A	409	16.1
B	64	2.5
C	348	13.7
D	625	24.6
E	665	26.2
F	76	3.0
G	343	13.5
H	345	13.6
J	305	12.0
K	254	10.0
L	229	9.0
M	254	10.0
N	15	0.6

LW0397 REV. A

WILDEN®

22069 Van Buren Street
Grand Terrace, CA 92313-5607 USA


O: +1 (909) 422-1730 F: +1 (909) 783-3440
www.wildenpump.com

PSG® a DOVER company
psgdover.com

PERFORMANCE

P8 METAL RUBBER-FITTED


Max. Flow Rate.....623 lpm (165 gpm)
Max. Inlet Pressure .....8.6 bar (125 psig)
Max. Size Solids Passage.....6.4 mm (1/4")
Max. Suction Lift .....6.9 m Dry (22.7')
8.6 m Wet (28.4')

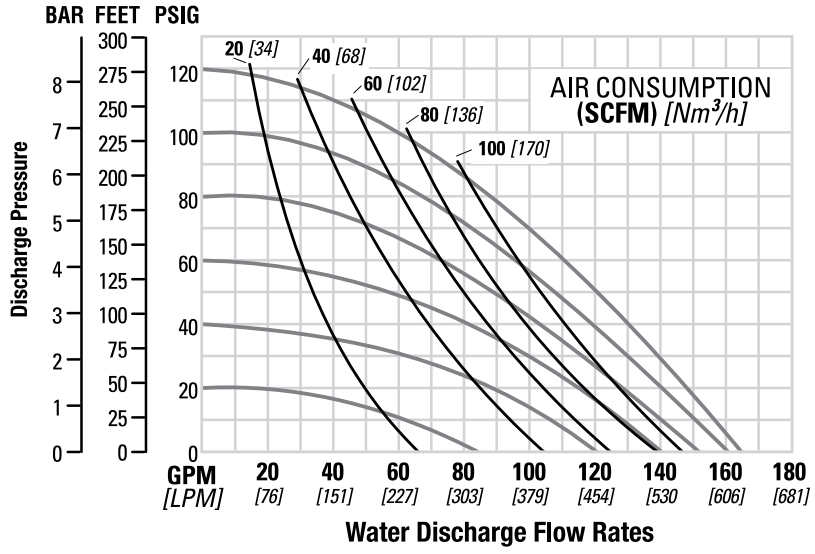

Click button to view Performance Curve → RUBBER-FITTED | TPE-FITTED

P8 METAL REDUCED-STROKE PTFE-FITTED

Max. Flow Rate.....496 lpm (131 gpm)
Max. Inlet Pressure .....8.6 bar (125 psig)
Max. Solids Passage.....6.4 mm (1/4")
Max. Suction Lift .....4.6 m Dry (15.0')
9.5 m Wet (31.0')

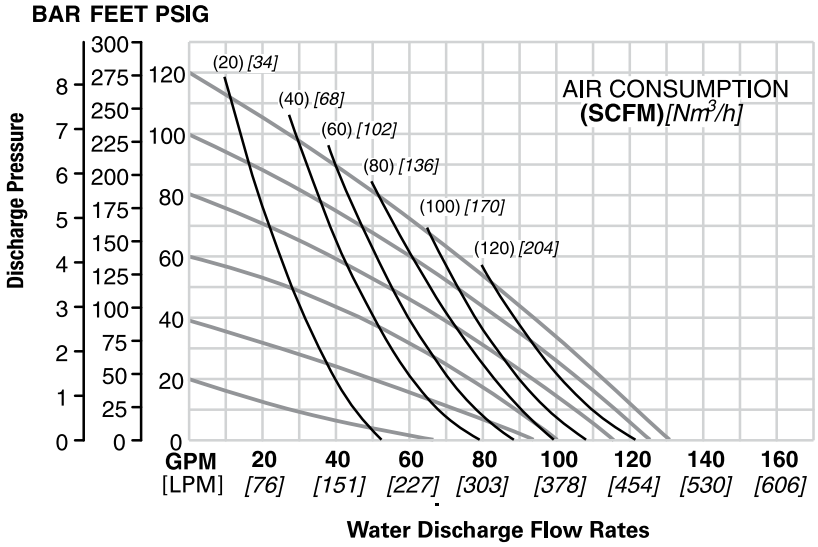

Click button to view Performance Curve → REDUCED-STROKE PTFE-FITTED | FULL-STROKE PTFE-FITTED | ULTRA-FLEX™-FITTED

WILDEN®
22069 Van Buren Street
Grand Terrace, CA 92313-5607 USA
O: +1 (909) 422-1730 F: +1 (909) 783-3440
www.wildenpump.com

PSG® a DOVER company
psgdover.com