25 mm (1") Pump Maximum Flow Rate: 121 lpm (32 gpm)



PS2 HYGEINIC SERIES METAL

PUMP DATA


Specifications:

Ship Weight
- 316L Stainless Steel..... 40 kg (88 lb)
- Alloy C..... 44 kg (97 lb)

Air Inlet ..... 1/2"
Inlet..... 25 mm (1")
Outlet..... 25 mm (1")

DIMENSIONAL DRAWING

PS2 Hygienic Series, Swivel

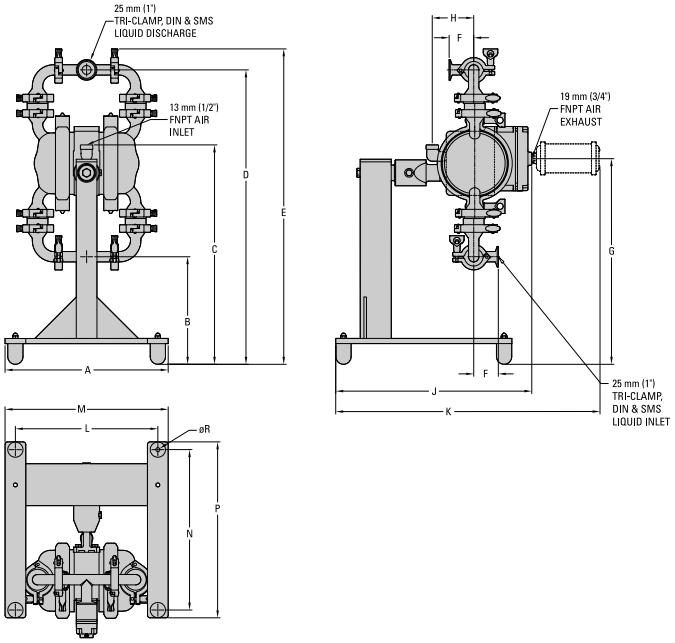


DIMENSIONS

ITEM	METRIC (mm)	STANDARD (inch)
A	401	15.8
B	264	10.4
C	538	21.2
D	721	28.4
E	775	30.5
F	61	2.4
G	505	19.9
H	104	4.1
J	480	18.9
K	648	25.5
L	351	13.8
M	401	15.8
N	394	15.5
P	432	17.0
R	ø10	ø.4

LW0436 REV. A

PS2 Hygienic Series, Vertically-Mounted, Fixed

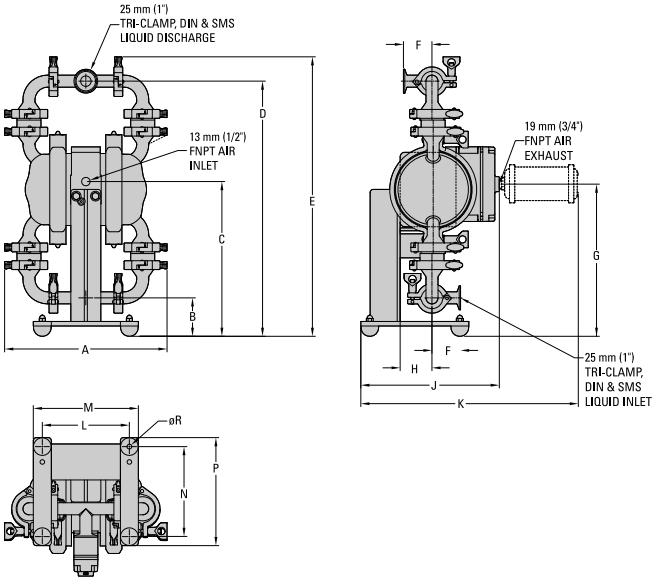

DIMENSIONS

ITEM	METRIC (mm)	STANDARD (inch)
A	343	13.5
B	81	3.2
C	327	12.9
D	540	21.3
E	591	23.3
F	61	2.4
G	322	12.7
H	69	2.7
J	292	11.5
K	460	18.1
L	185	7.3
M	224	8.8
N	191	7.5
P	229	9.0
R	ø10	ø0.4

LW0435 REV. A


WILDEN®
22069 Van Buren Street
Grand Terrace, CA 92313-5607 USA
O: +1 (909) 422-1730 F: +1 (909) 783-3440
www.psgdover.com

PSG a DOVER company
psgdover.com

PERFORMANCE

PS2 HYGIENIC SERIES RUBBER-FITTED


Max. Flow Rate..... 121 lpm (32 gpm)
Max. Inlet Pressure .....8.6 bar (125 psig)
Max. Size Solids.....6.4 mm (1/4")
Max. Suction Lift.....3.9 m Dry (13')
7.6 m Wet (25')

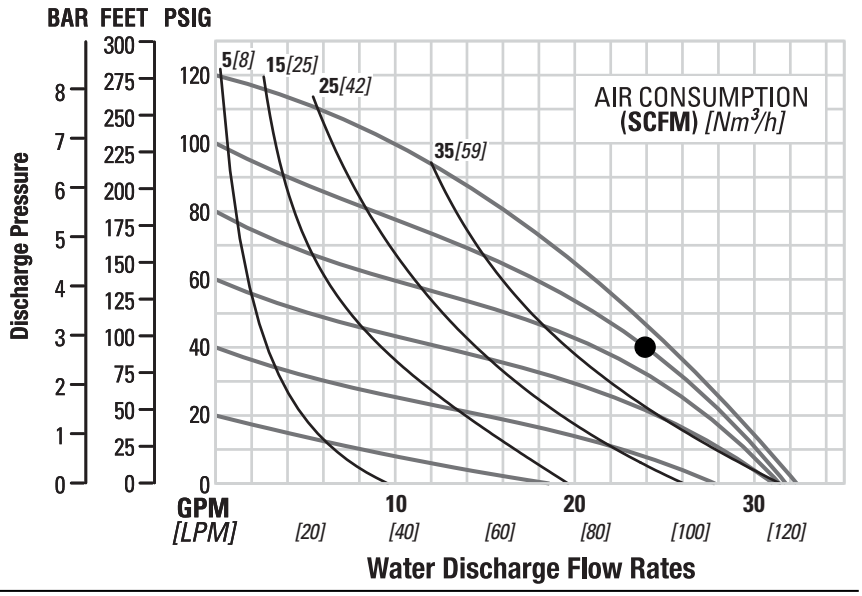

Click button to view Performance Curve → RUBBER-FITTED | FULL-STROKE TPE IPD-FITTED

PS2 HYGIENIC SERIES FULL-STROKE TPE-FITTED

Max. Flow Rate..... 109 lpm (29 gpm)
Max. Inlet Pressure .....8.6 bar (125 psig)
Max. Size Solids.....6.4 mm (1/4")
Max. Suction Lift.....1.2 m Dry (4')
7.9 m Wet (26')

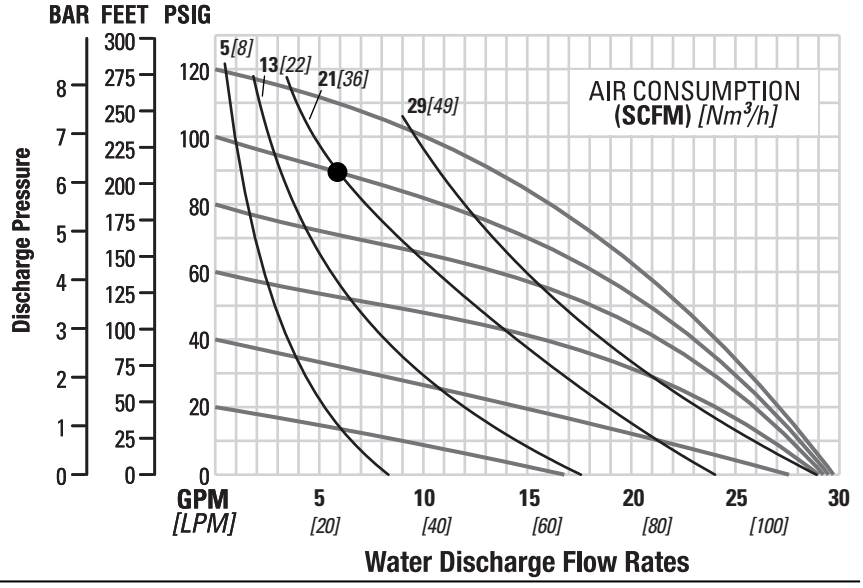

Click button to view Performance Curve → FULL-STROKE TPE-FITTED | FULL-STROKE PTFE-FITTED

WILDEN®
22069 Van Buren Street
Grand Terrace, CA 92313-5607 USA
O: +1 (909) 422-1730 F: +1 (909) 783-3440
www.psgdover.com

PSG® a DOVER company
psgdover.com